

# S Band Surface Mount Circulator

## JCM3300T3600PT2C

### Description:




JCM3300T3600PT2C is a surface mount circulator in the frequency 3.300~3.600GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.30dB and minimum return loss of 20.0. It can handle a Power FWD/REV/PK(Watt) of 20/20/100

### Electrical Specification

Part Number	JCM3300T3600PT2C
Frequency (GHz)	3.300~3.600
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	20/20/100


### Outline

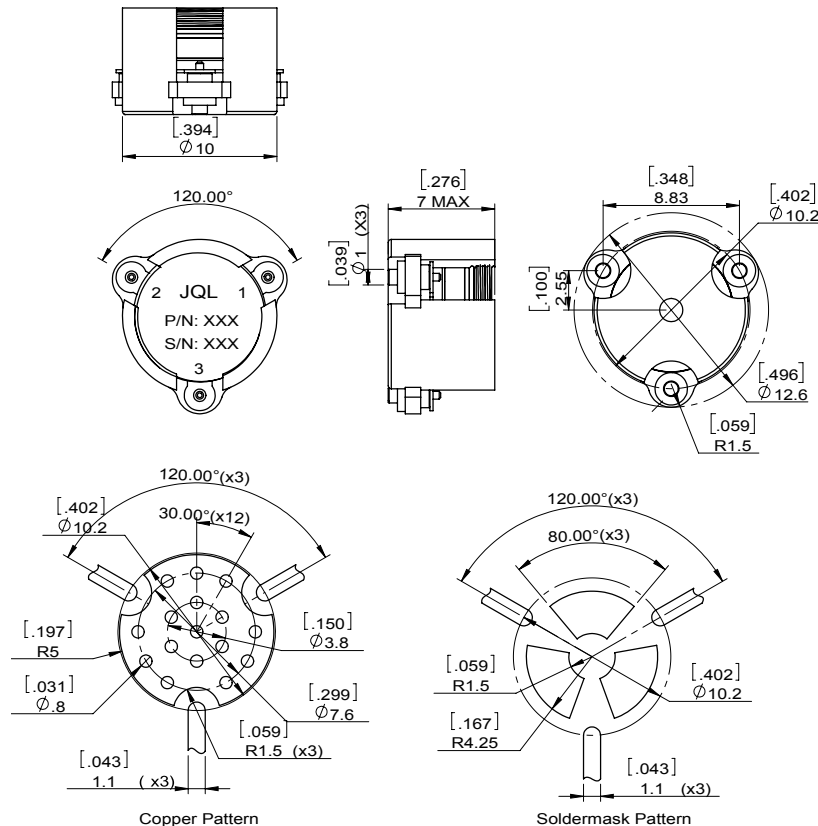

# S Band Surface Mount Circulator

## JCM3300T3600PT2C

### Test Data

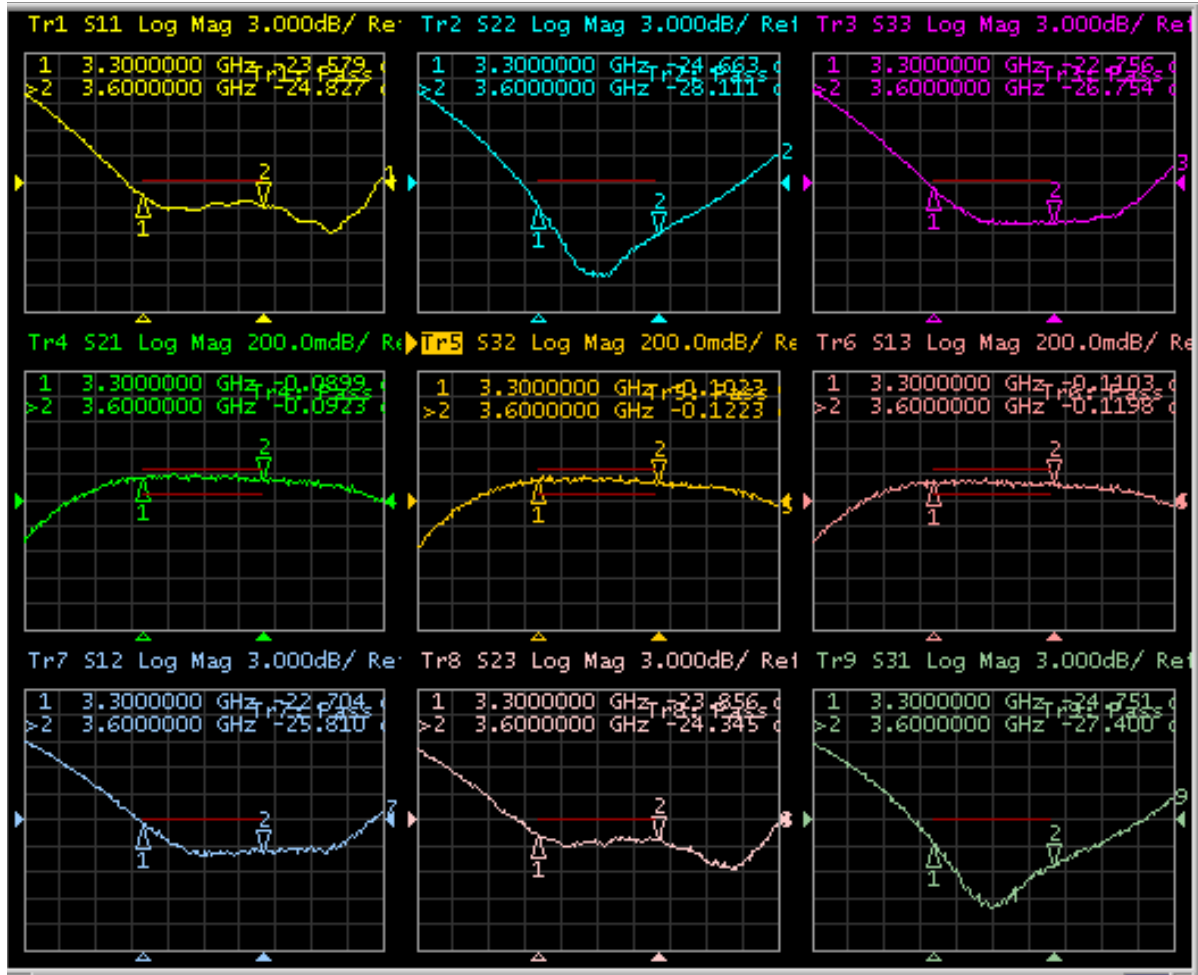

### Applications

- Telecom