

L Band Coaxial Isolator

JIC2100T2700SMSF10

Description:




JIC2100T2700SMSF10 is a coaxial Isolator in the frequency 2.100~2.700GHz. The device is extremely stable over the temperature range of -20°C to +70°C, with maximum insertion loss of 0.5dB and minimum return loss of 17.7dB. It can handle a CW Power FWD/REV/PK(Watt) of 100/100/-

Electrical Specification

Part Number	JIC21700T2700SMSF10
Frequency (GHz)	2.100~2.700
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	17.7
Operating Temperature	-20°C~70°C
Power FWD/REV/PK(Watt)	100/100/-


Outline

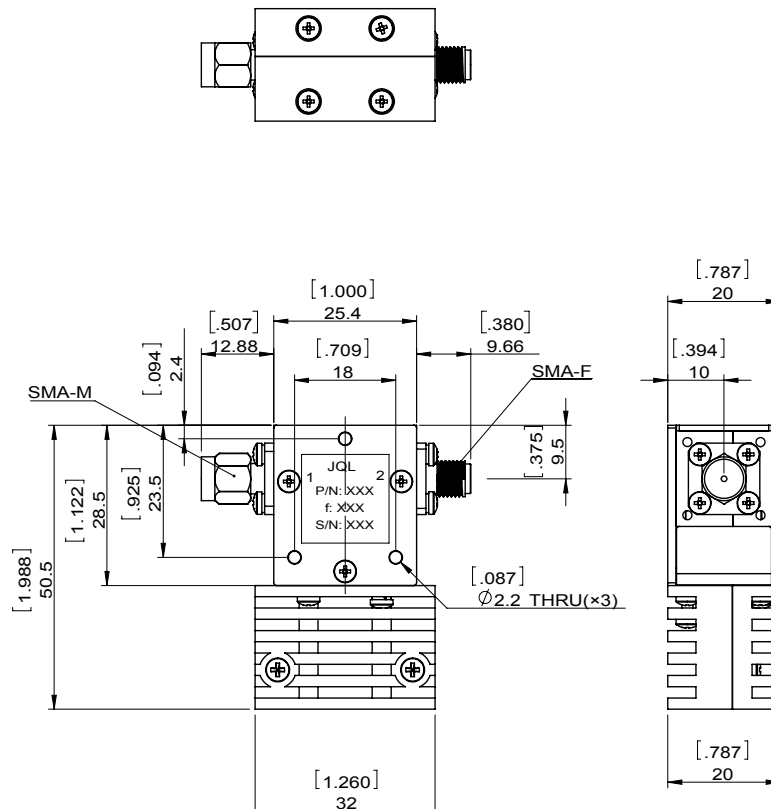

L Band Coaxial Isolator

JIC2100T2700SMSF10

Test Data

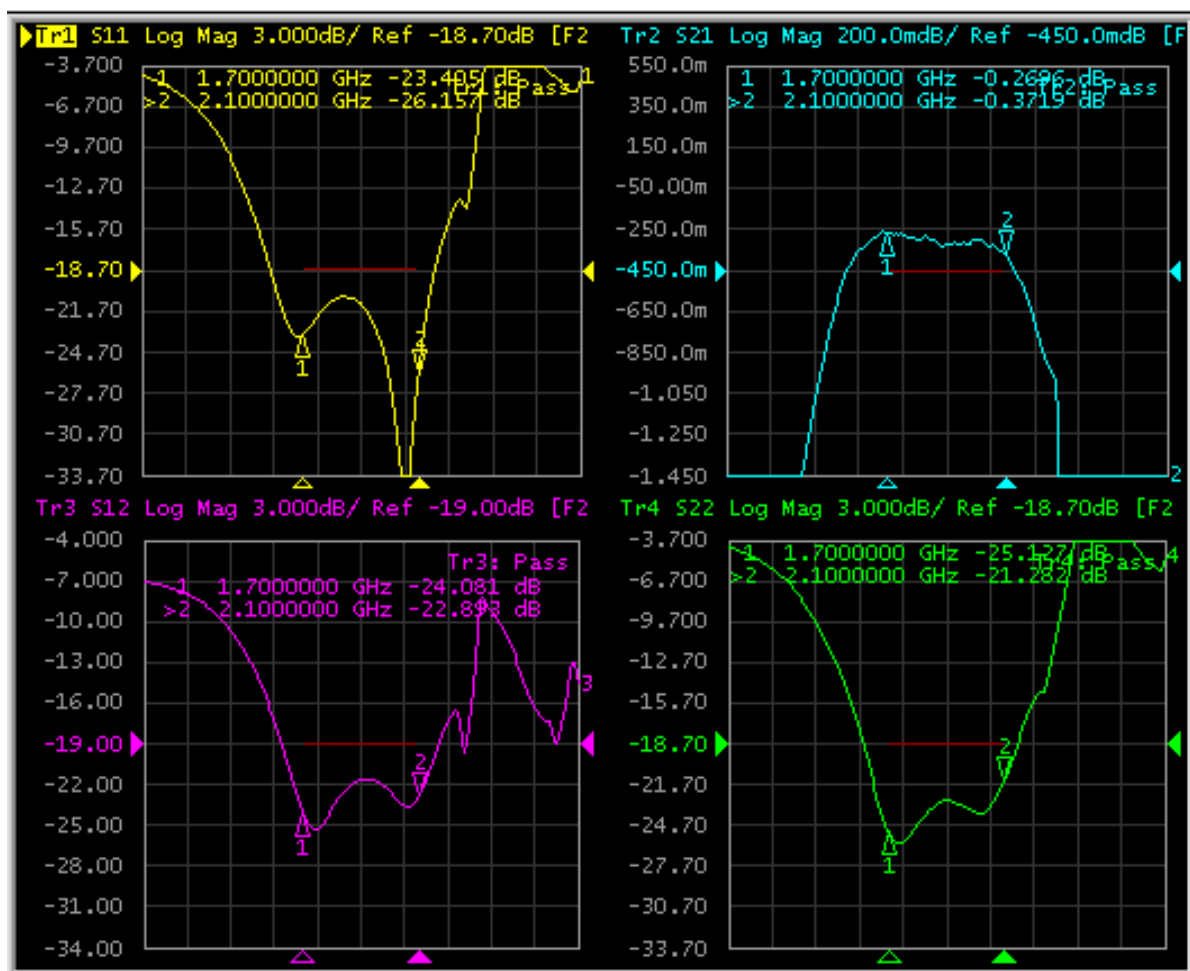

Applications

- Telecom