


K Band Coaxial Isolator

JIC25K0T27K5KMKF0

Description:

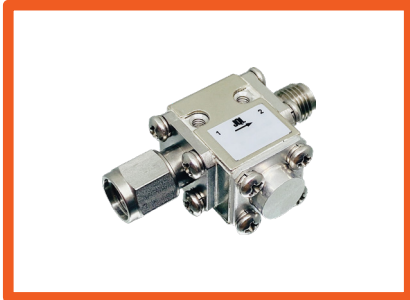


JIC25K0T27K5KMKF0 is a coaxial Isolator in the frequency 25.000~27.500GHz. The device is extremely stable over the temperature range of -30°C to +75°C, with maximum insertion loss of 0.60dB and minimum return loss of 19.0dB. It can handle a Power FWD/REV/PK(Watt) of 2/1/-

Electrical Specification

Part Number	JIC25K0T27K5KMKF0
Frequency (GHz)	25.000~27.500
Insertion Loss(dB)MAX	0.6
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	19.0
Operating Temperature	-30°C~75°C
Power FWD/REV/PK(Watt)	2/1/-


Outline

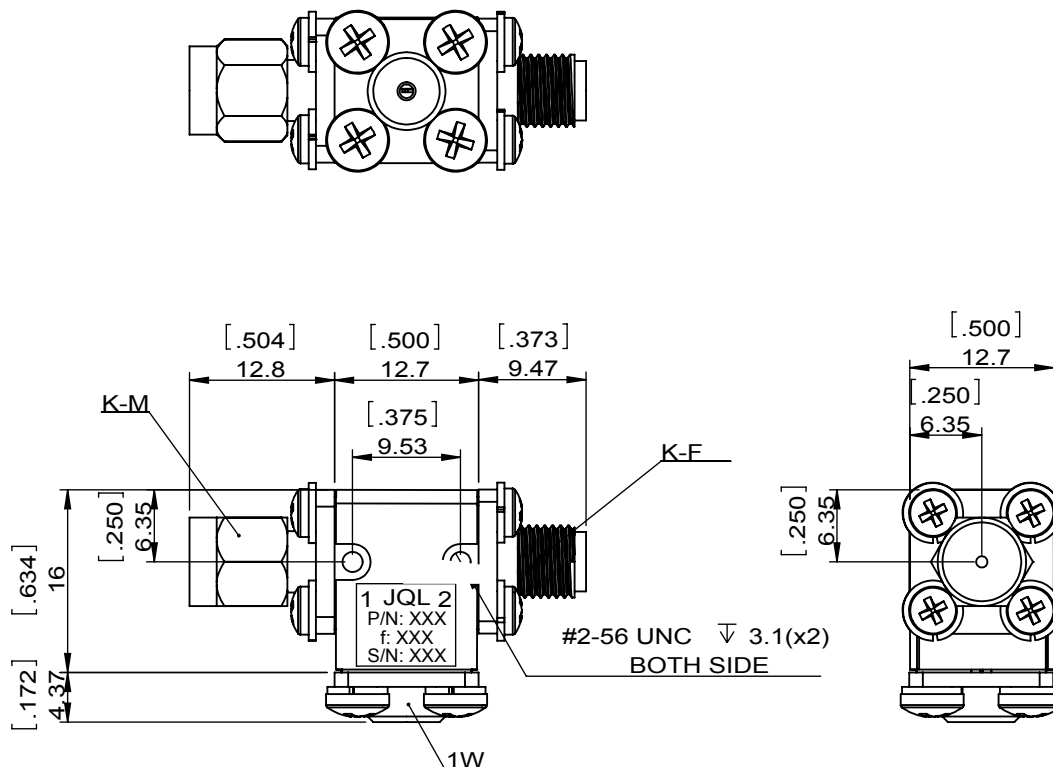

K Band Coaxial Isolator

JIC25K0T27K5KMKF0

Test Data

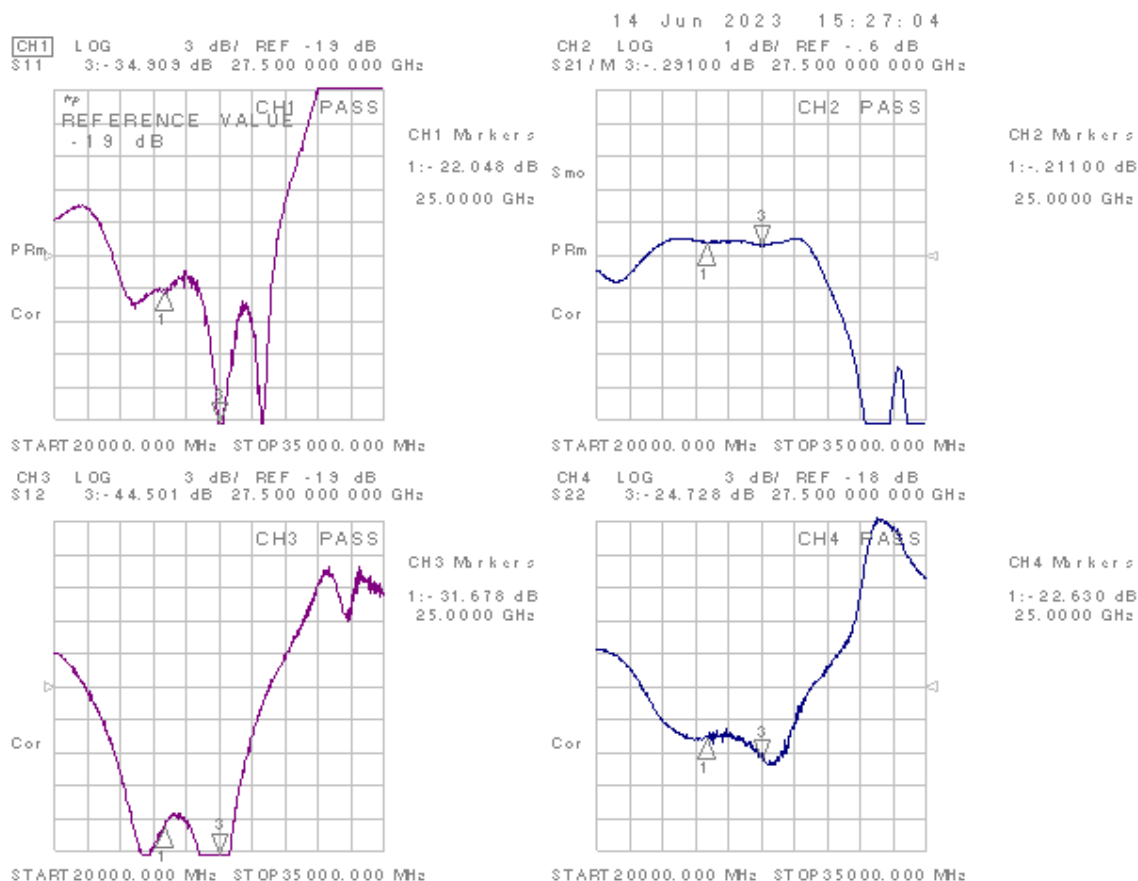

Applications

- SATCOM
- Space