


JID0869T0894AM6A30

Electrical Specification

Part Number	JID0869T0894AM6A30
Frequency (GHz)	0.869~0.894
Insertion Loss(dB)MAX	0.25@25℃ 0.35@-40℃~+100℃ 0.40@+100℃~+125℃
Isolation(dB)MIN	22.0@25℃ 18.0@-40℃~+100℃ 17.0@+100℃~+125℃
Return Loss(dB)MIN	24.0@25℃ 18.0@-40℃~+100℃ 17.0@+100℃~+125℃
Operating Temperature	-40℃~125℃
Power FWD/REV/PK(Watt)	120/60(>20 SECS)
Tab(W×LG×THK)(mm[Inch])	1.2[0.047]x2.5[0.098]x0.2[0.008]


Outline

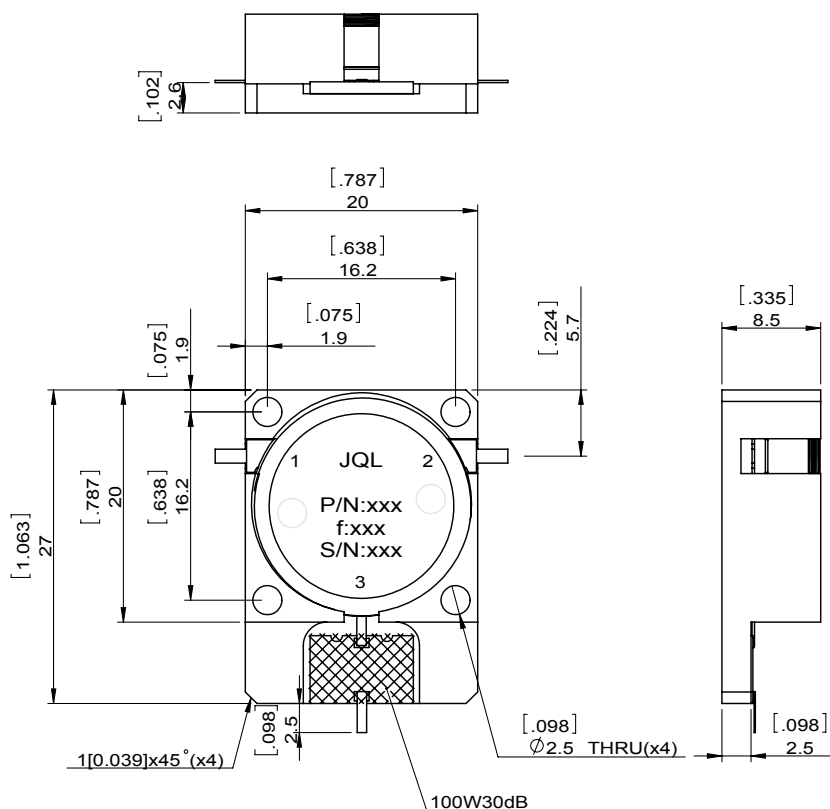

UHF Drop in Isolator

JID0869T0894AM6A30

Test Data

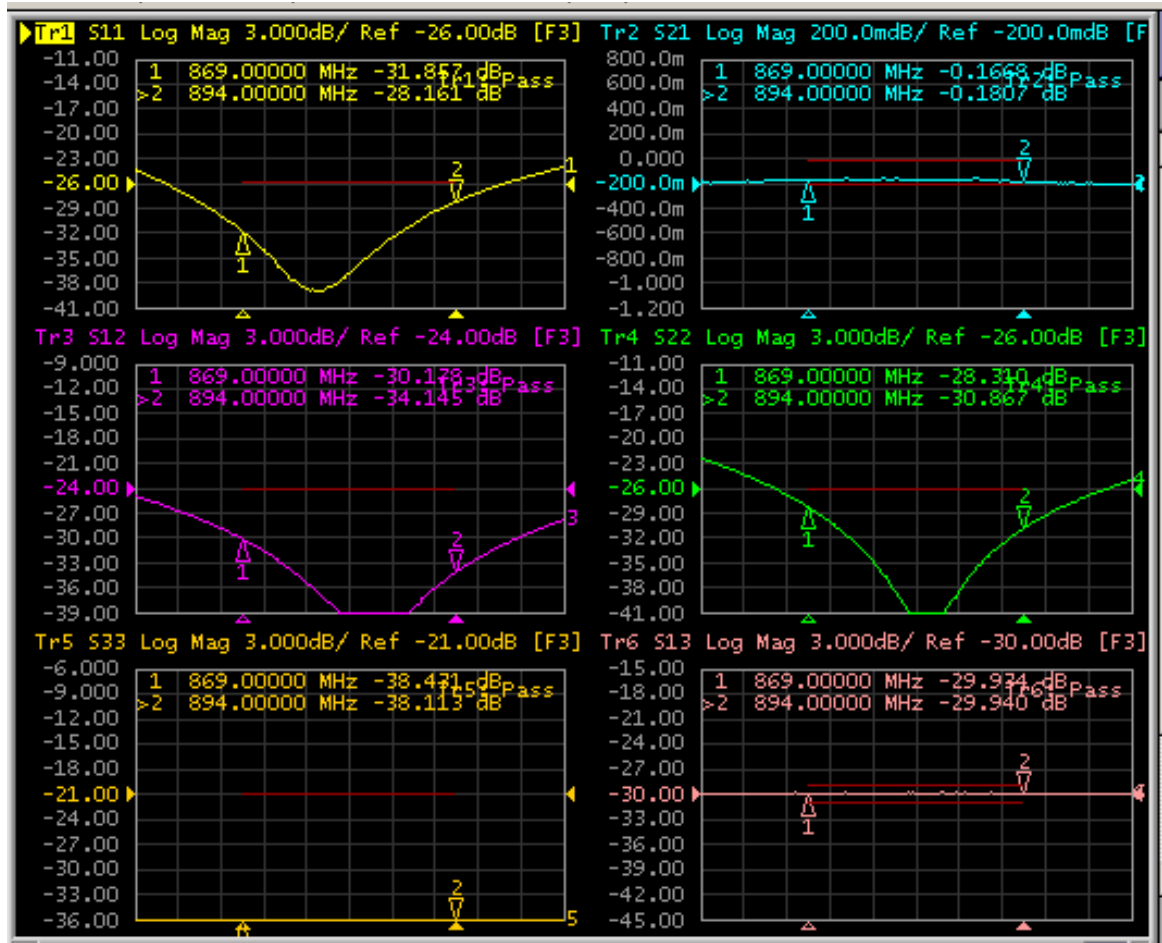

Applications

- Telecom