

L Band Surface Mount Isolator

JIM1200T1600P1N0

Description:




JIM1200T1600P1N0 is a surface mount Isolator in the frequency 1.200~1.600 GHz. The device is extremely stable over the temperature range of -20°C to +70°C, with maximum insertion loss of 0.45dB and minimum return loss of 18.0dB. It can handle CW Power FWD/REV/PK(Watt) of 100/100/100

Electrical Specification

Part Number	JIM1200T1600P1N0
Frequency (GHz)	1.200~1.600
Insertion Loss(dB)MAX	0.45
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	18.0
Operating Temperature	-20°C~70°C
Power FWD/REV/PK(Watt)	100/100/100


Outline

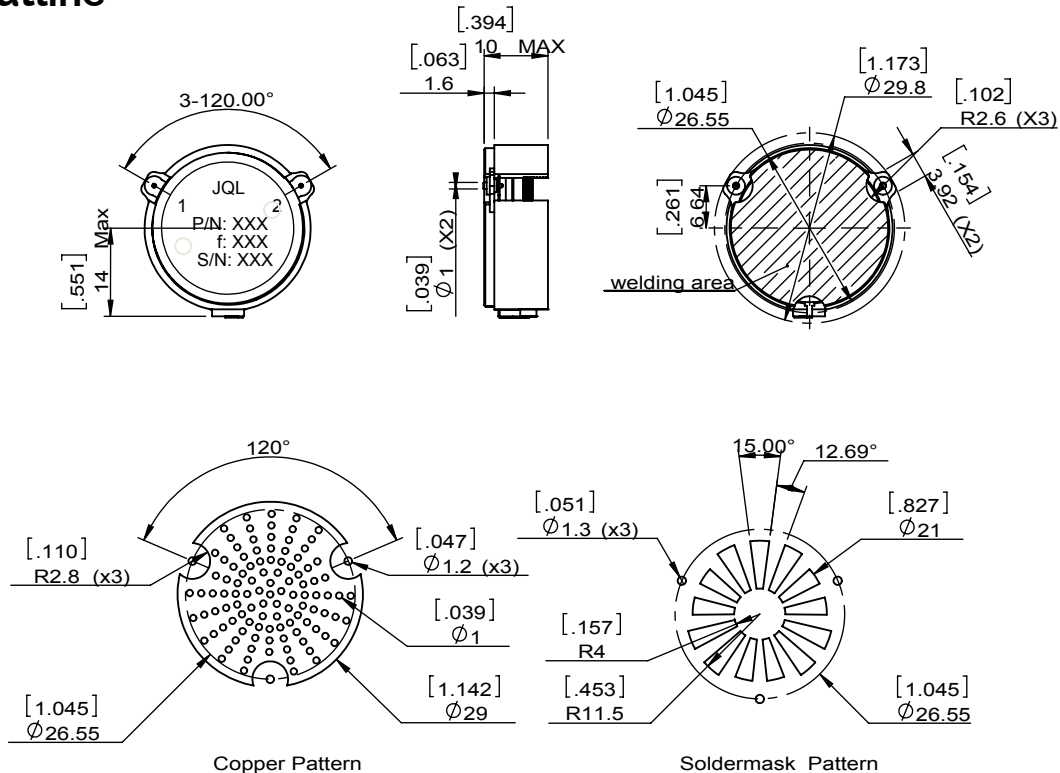

L Band Surface Mount Isolator

JIM1200T1600P1N0

Test Data

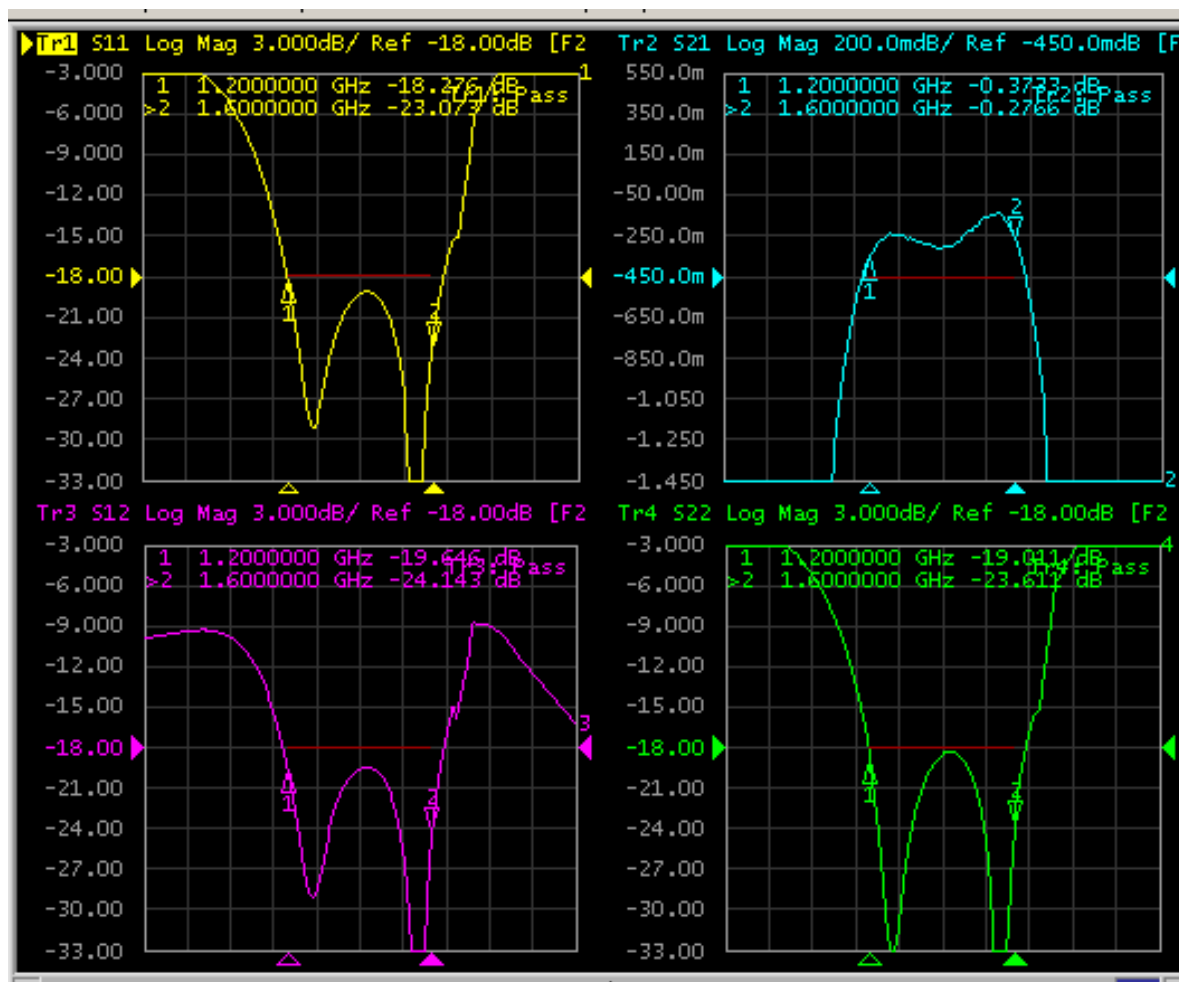

Applications

- Radar