

Ku Band Waveguide Isolator

JIWR75-44F-13K75T14K5C-FM

Description:




JIWR75-44F-13K75T14K5C-FM is a Waveguide isolator in the frequency 13.75~14.50 GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.30dB and minimum return loss of 18.0dB. This circulator can handle a CCW Power FWD/REV/P-K(Watt) of 1/0.5/-

Electrical Specification

Part Number	JIWR75-44F-13K75T14K5C-FM
Frequency (GHz)	13.75~14.50
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	18.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	1/0.5/-

Outline

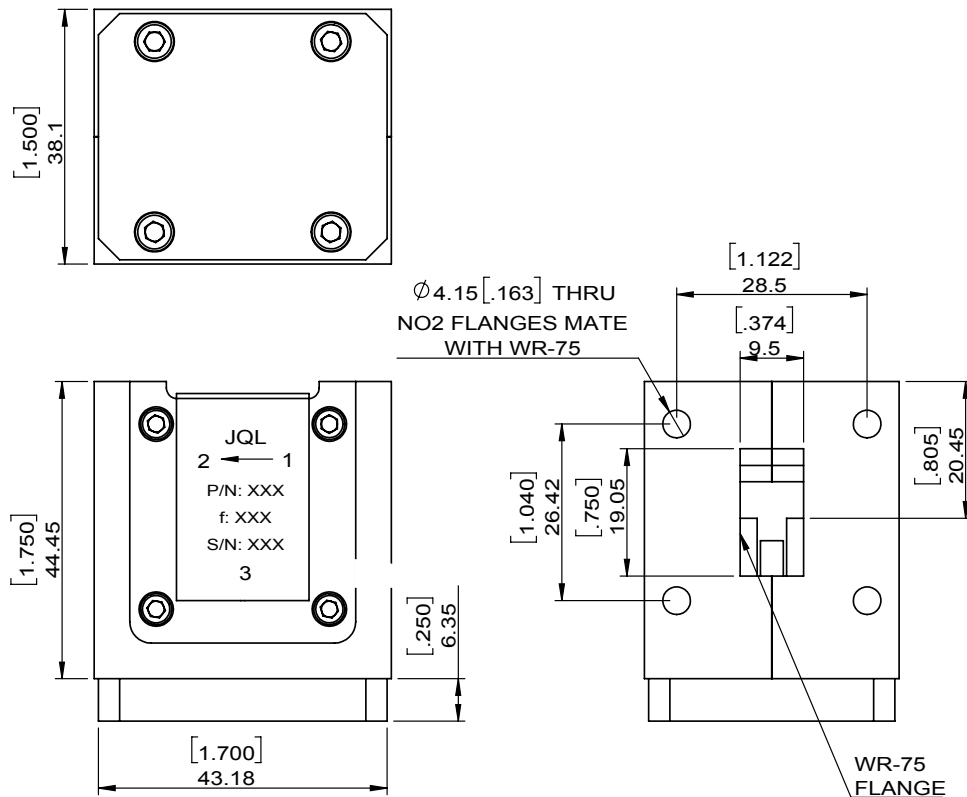

Ku Band Waveguide Isolator

JIWR75-44F-13K75T14K5C-FM

Test Data



Applications

- Space