CVD Diamond Terminations

JDR-0805-100-18G


Description:



CVD Diamond Chip Terminations are a proven design for microwave applications. This is unique because of the smaller size and weight that can handle high power, both CW and peak. The terminations are manufactured using thin film technology, ideal for peak power applications. It has gold finish, making it convenient for mounting using wire bondable as well as solderable technologies.

Specification

Part Number	JDR-0805-100-18G
Frequency (GHz)	DC ~18.0 GHz
Input Power	100 Watts
VSWR	1.50
Resistance	50ohm±5%
Temperature Coefficient	±250ppm/°C
Operating Temperature	-55 °C ~ +150 °C
Resistor Construction	Thin Film
Terminal Material	Gold over Nickel
Substrate	CVD Diamond

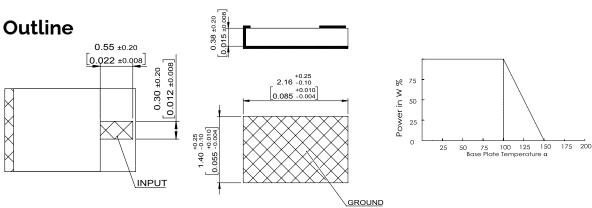

Features

- Small footprint
- Excellent Power Handling Capability
- Wire Bondable, Solderable and Surface Mountable
- RoHS Compliant
- Tape & Reel or Waffle packaging available

Applications

- Isolators
- Filters
- High Power Amplifiers
- Satellite Communications
- Radar
- RF power modules

Page | 1

DORADO UU FERROCOM

www.jqltechnologies.com | 1255 Armour Blvd, Mundelein, IL 60060, USA. Phone: +1 888 236 9828 (US) | +1 630 930 9917 (INTL) | Email: sales@jqltechnologies.com