


UHF Band Coaxial Circulator

JCC0600T0900N10

Description:

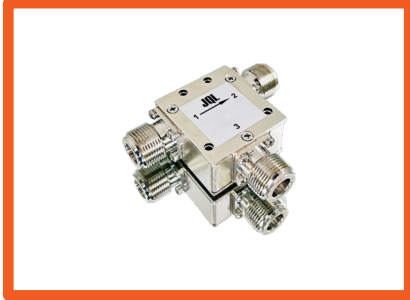


JCC0600T0900N10 is a coaxial circulator in the frequency 0.600~0.900GHz. The device is extremely stable over the temperature range of -30°C to +75°C, with maximum insertion loss of 0.6@+25°C || 0.65@-30~+75°C and minimum return loss of 16.0@+25°C || 15.0@-30~+75°C. This circulator can handle a CW Power FWD/REV/P-K(Watt) of 100/100/-

Electrical Specification

Part Number	JCC0600T0900N10
Frequency (GHz)	0.600~0.900
Insertion Loss(dB)MAX	0.6@+25°C 0.65@-30~+75°C
Isolation(dB)MIN	16.0@+25°C 15.0@-30~+75°C
Return Loss(dB)MIN	16.0@+25°C 15.0@-30~+75°C
Operating Temperature	-30°C~75°C
Power FWD/REV/PK(Watt)	100/100/-


Outline

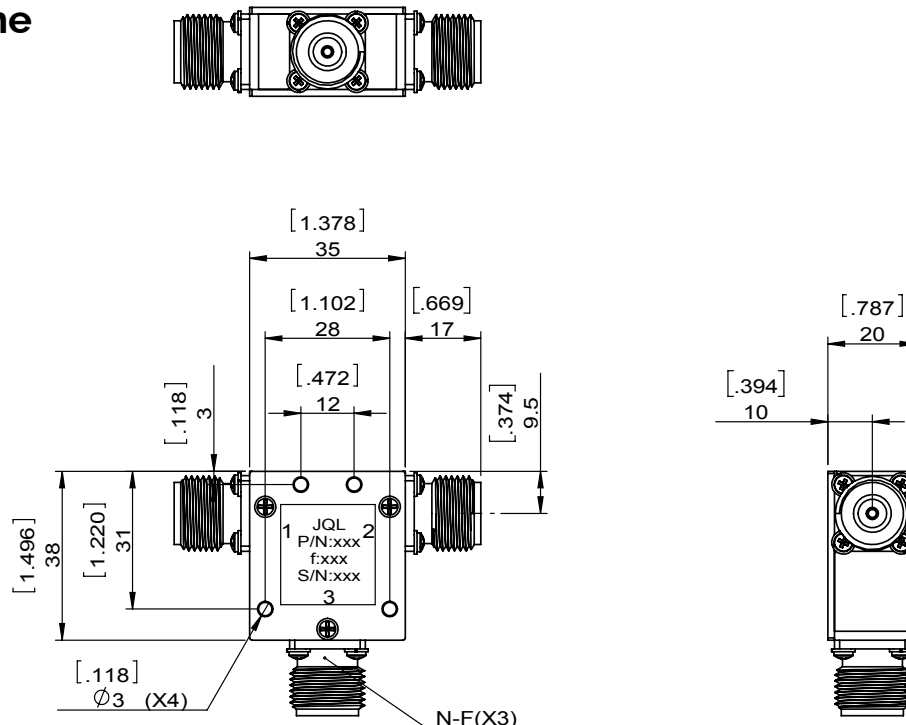

UHF Band Coaxial Circulator

JCC0600T0900N10

Test Data

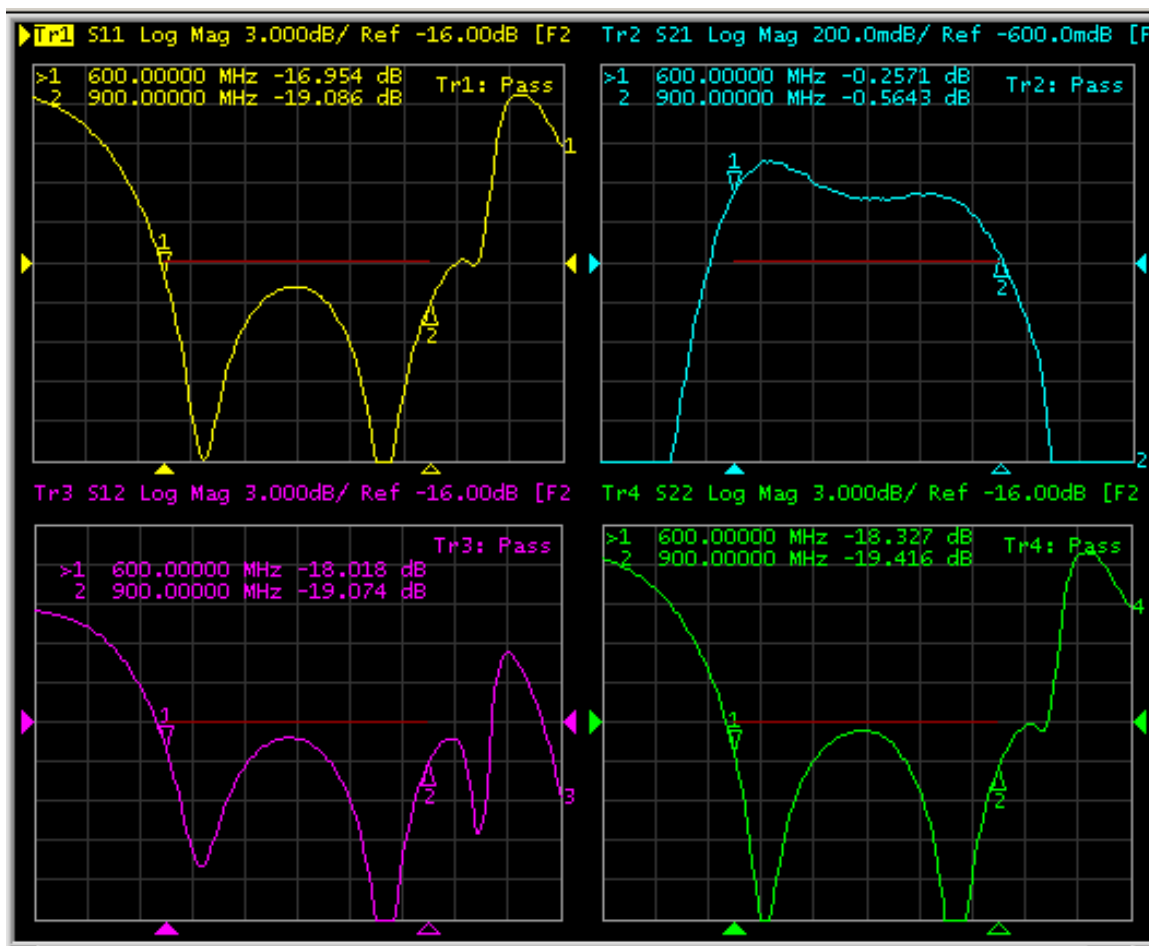

Applications

- Telecom