

JCD1930T1995SM10

Electrical Specification

Part Number	JCD1930T1995SM10
Frequency (MHz)	1.930~1.995
Insertion Loss(dB)MAX	0.30
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
Operating Temperature	-30°C~+80°C
Power FWD/REV/PK(Watt)	100/100/-
Tab(W×LG×THK)(mm[Inch])	1.0[0.039]x2.5[0.098]x0.2[0.008]

Technical drawing of the JQ1L pressure washer, showing front, top, and side views with dimensions in inches and millimeters.

Front View Dimensions:

- Overall Width: 19 [1.748]
- Overall Height: 6.2 [0.244]
- Top Mounting Hole Spacing: 14.5 [0.571]
- Bottom Mounting Hole Spacing: 14.5 [0.571]
- Side Mounting Hole Spacing: 2.25 [0.089]
- Bottom Flange Thickness: 2.25 [0.089]
- Bottom Flange Radius: $R1$ (X4) [0.039]
- Bottom Flange Hole Diameter: $\phi 2.2$ THRU (X4) [0.087]

Top View Dimensions:

- Overall Width: 19 [1.748]
- Overall Height: 14.5 [0.571]
- Top Mounting Hole Spacing: 14.5 [0.571]
- Side Mounting Hole Spacing: 2.25 [0.089]

Side View Dimensions:

- Overall Width: 8 [0.315]
- Overall Height: 3 [0.118]


Internal Components:

- Motor (1)
- Trigger Gun (2)
- Nozzle (3)

S Band Drop-In Circulator

JCD1930T1995SM10

Test Data

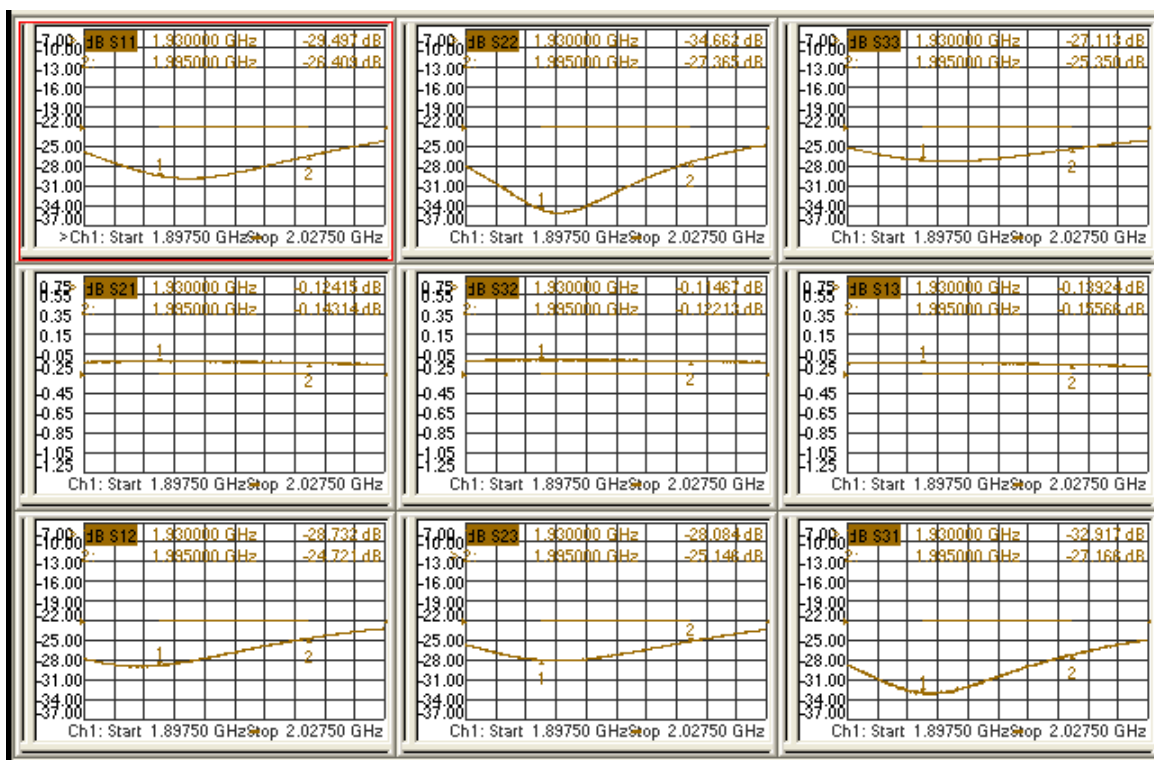

Applications

- Telecom