


UHF Band Surface Mount Circulator

JCM0762T0870PL2

Description:

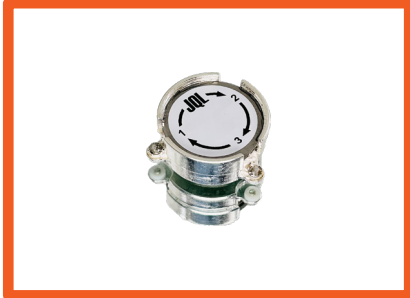


JCM0762T0870PL2 is a surface mount circulator in the frequency 0.762~0.870GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.55dB and minimum return loss of 18.0dB. It can handle a CW Power FWD/REV/P-K(Watt) of 20/20/80

Electrical Specification

Part Number	JCM0762T0870PL2
Frequency (GHz)	0.762~0.870
Insertion Loss(dB)MAX	0.55
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	18.0
Operating Temperature	-40°C~+85°C
Power FWD/REV/PK(Watt)	20/20/80


Outline

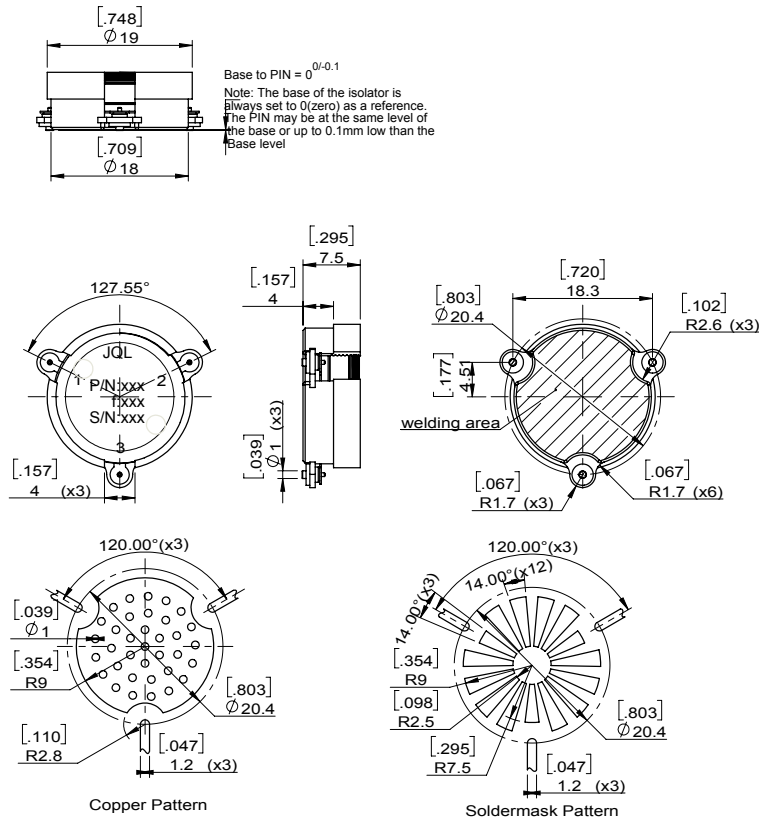

UHF Band Surface Mount Circulator

JCM0762T0870PL2

Test Data

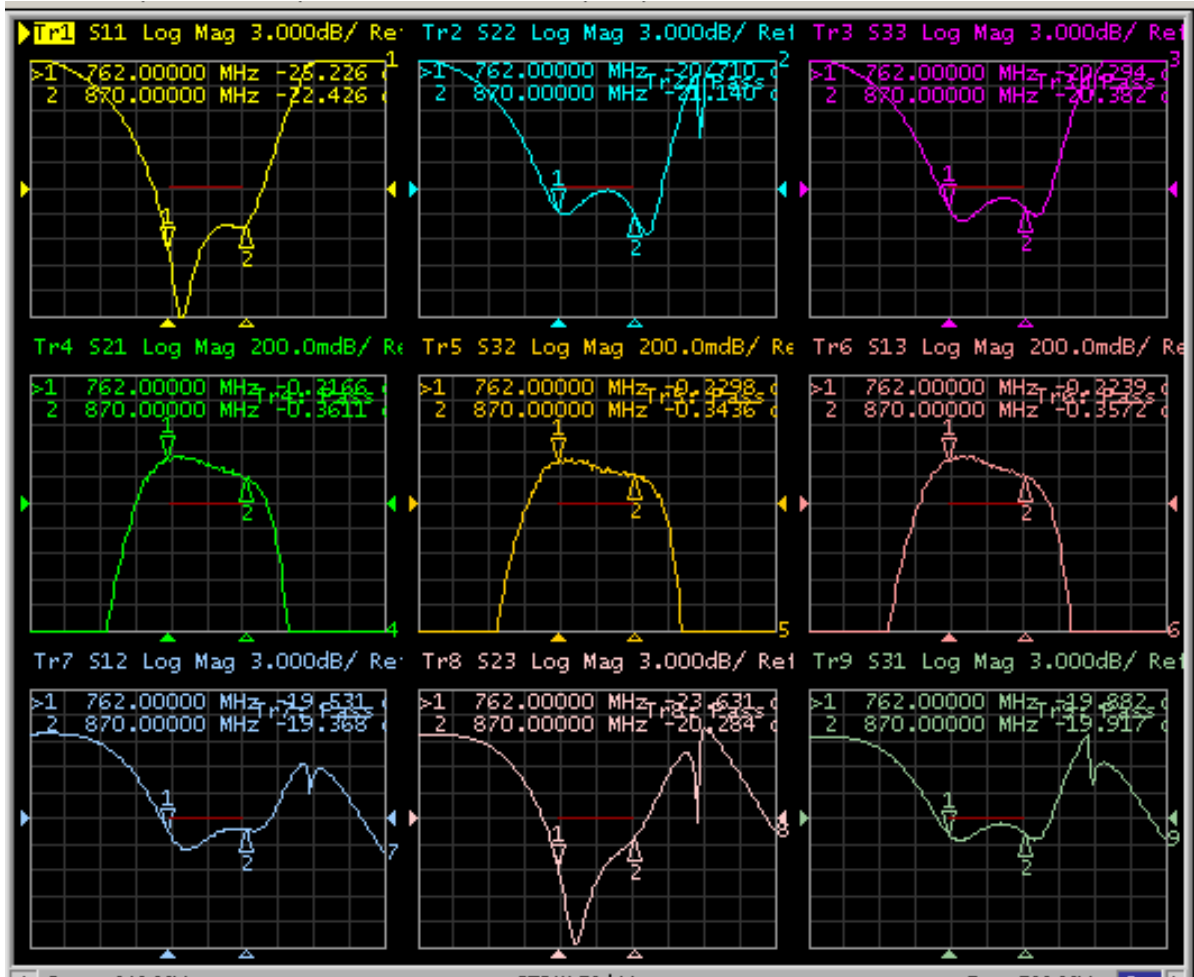

Applications

- Telecom