

# UHF Band Surface Mount Circulator

## JCM0916T0923S10R

### Description:




JCM0916T0923S10R is a surface mount circulator in the frequency 0.916~0.923GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.25dB and minimum return loss of 25.0dB. It can handle CW Power FWD/REV/PK(Watt) of 100/100/-

### Electrical Specification

Part Number	JCM0916T0923S10R
Frequency (GHz)	0.916~0.923
Insertion Loss(dB)MAX	0.25
Isolation(dB)MIN	25.0
Return Loss(dB)MIN	25.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	100/100/-


### Outline

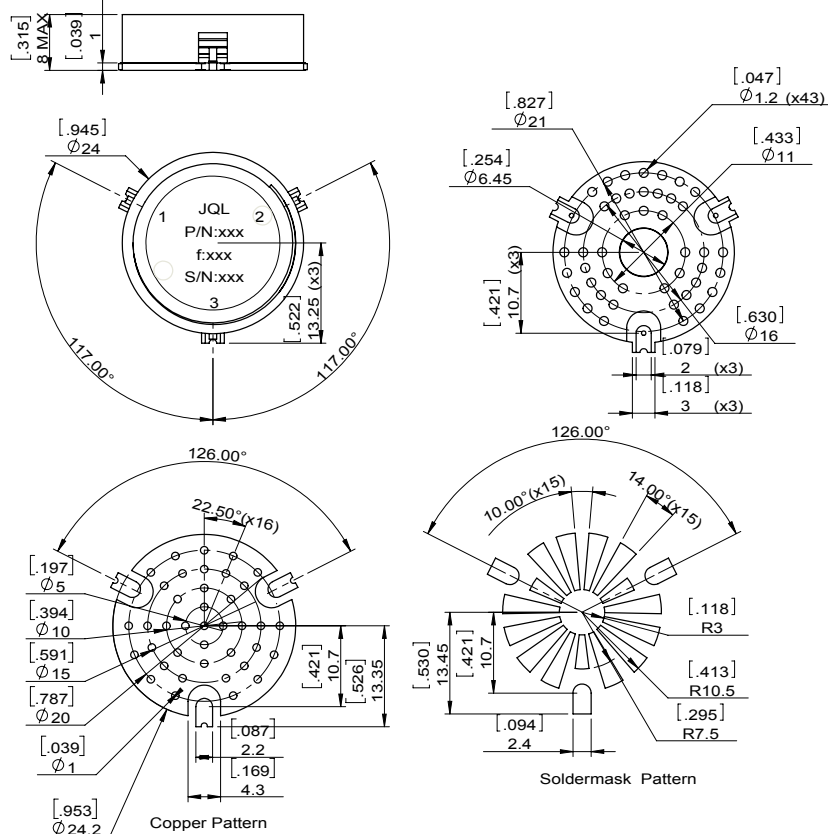

# UHF Band Surface Mount Circulator

## JCM0916T0923S10R

### Test Data

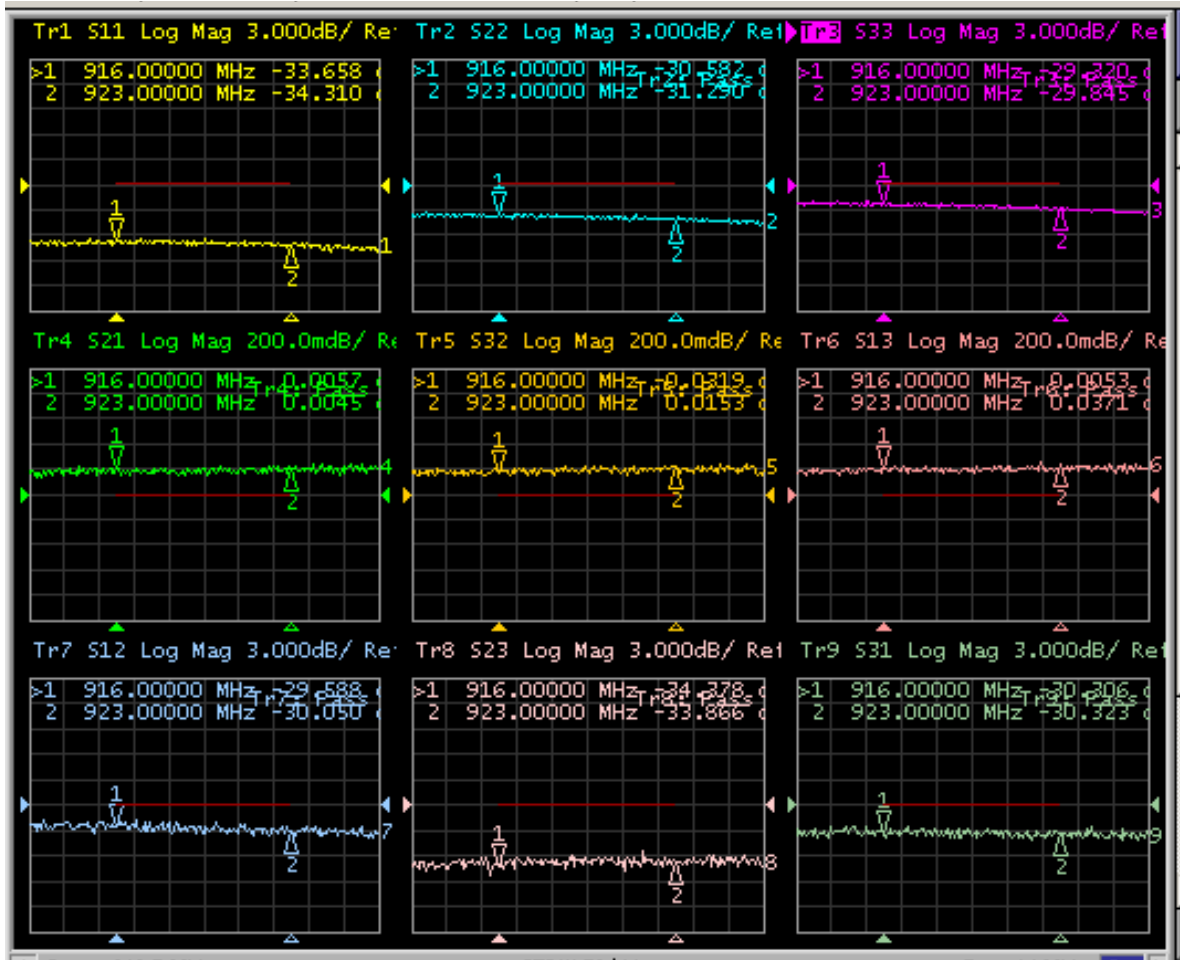

### Applications

- Telecom