

10.20 ~ 13.20 GHz Band Surface Mount Isolator

JIM10K2T13K2XM0

Description:




JIM10K2T13K2XM0 is a surface mount isolator in the frequency 10.20~13.20GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 1.0dB and minimum return loss of 18.0@+25°C || 15.0@-40~+85°C. It can handle a CW Power FWD/REV/PK(Watt) of 1/-/-

Electrical Specification

Part Number	JIM10K2T13K2XM0
Frequency (GHz)	10.20~13.20
Insertion Loss(dB)MAX	1.0
Isolation(dB)MIN	18.0@+25°C 15.0@-40~+85°C
Return Loss(dB)MIN	15.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	1/-/-


Outline

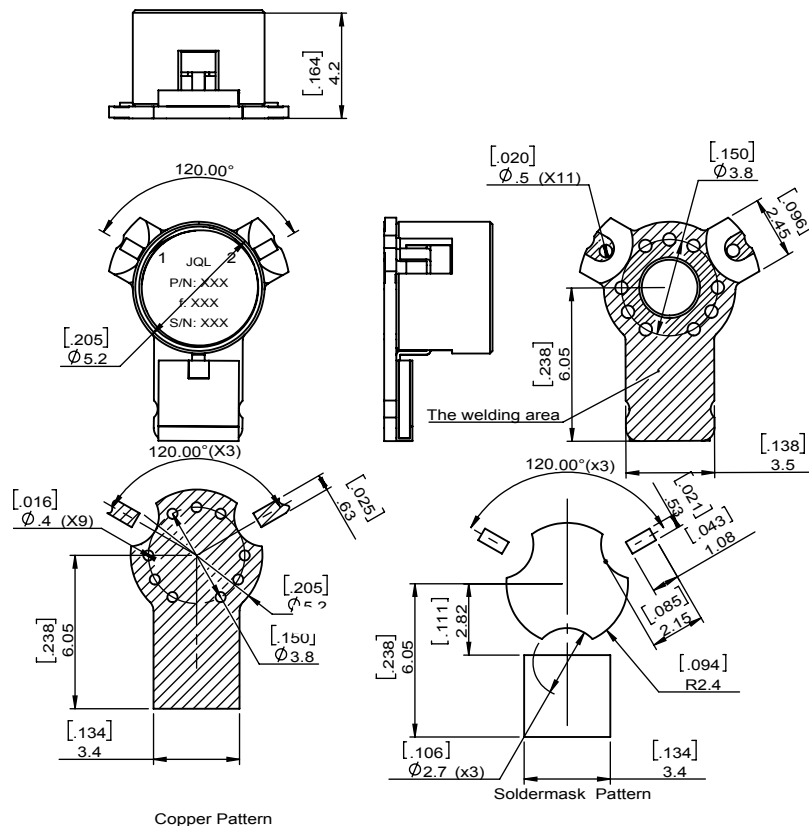

10.20 ~ 13.20 GHz Band Surface Mount Isolator

JIM10K2T13K2XM0

Test Data

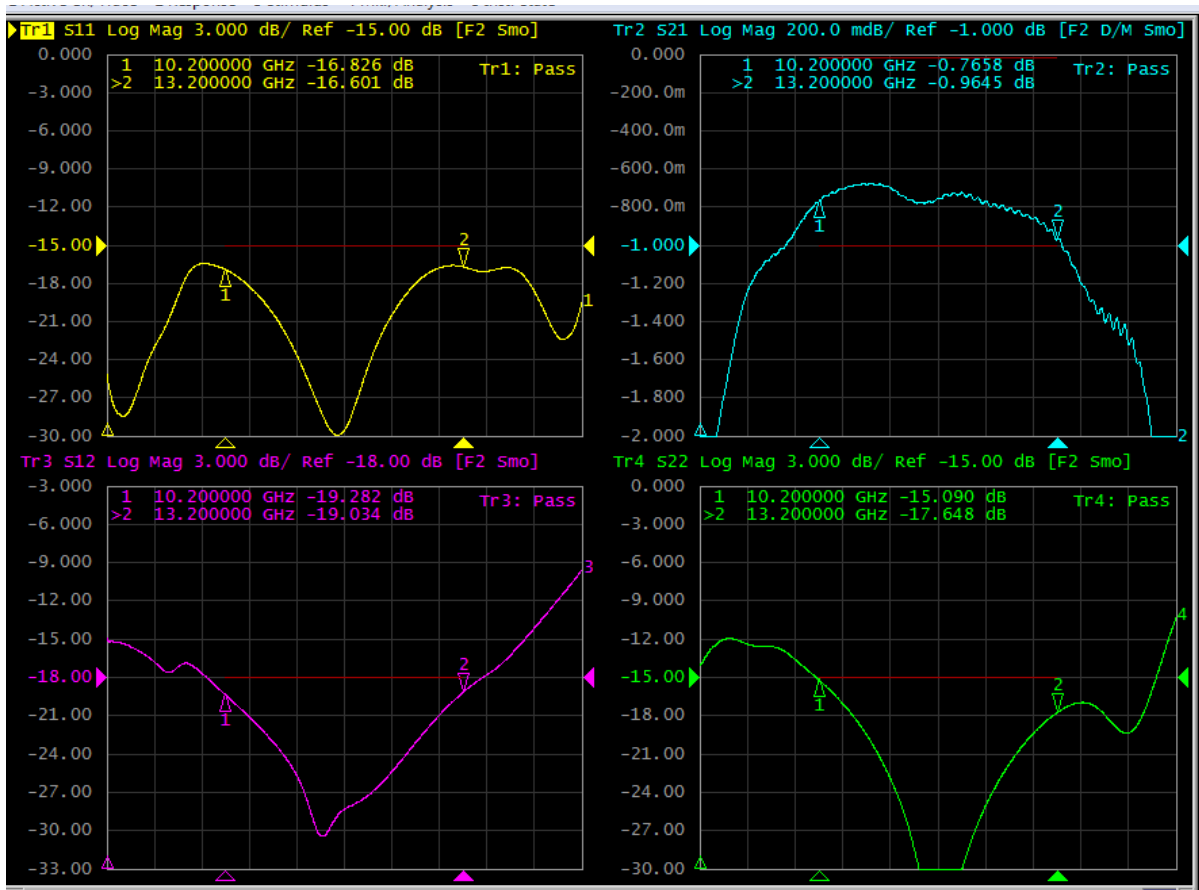

Applications

- Radio Link

JQL TECHNOLOGIES
TECHNOLOGY ON THE MOVE