

L Band Surface Mount Isolator

JIM2350T2360PL10RA3

Description:




JIM2350T2360PL10RA3 is a surface mount isolator in the frequency 2.350~2.360GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.30dB and minimum return loss of 20.0dB. It can handle a CW Power FWD/REV/P-K(Watt) of 100/100/-

Electrical Specification

Part Number	JIM2350T2360PL10RA3
Frequency (GHz)	2.350~2.360
Insertion Loss(dB)MAX	0.30
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	100/100/-


Outline

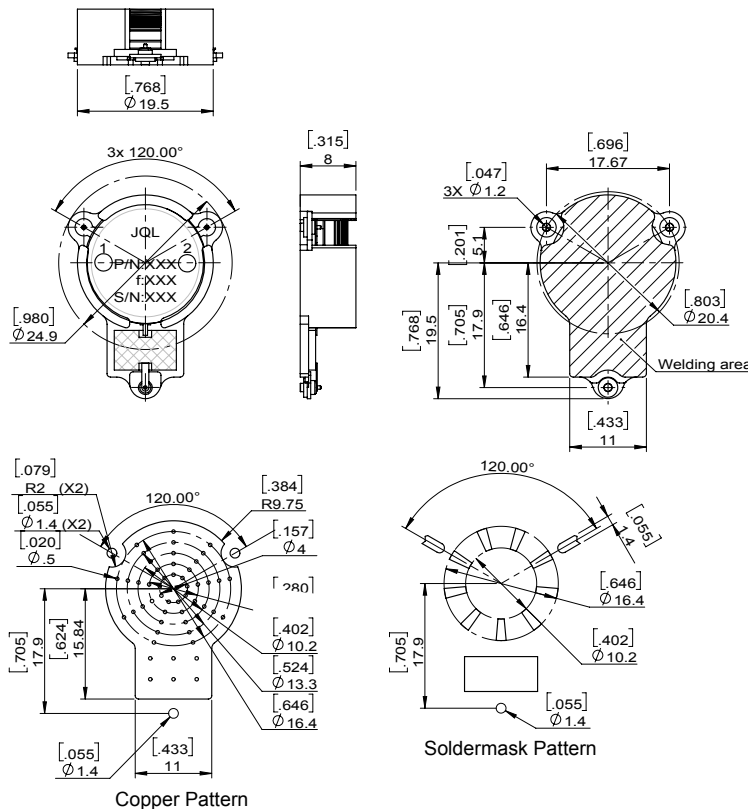

L Band Surface Mount Isolator

JIM2350T2360PL10RA3

Test Data

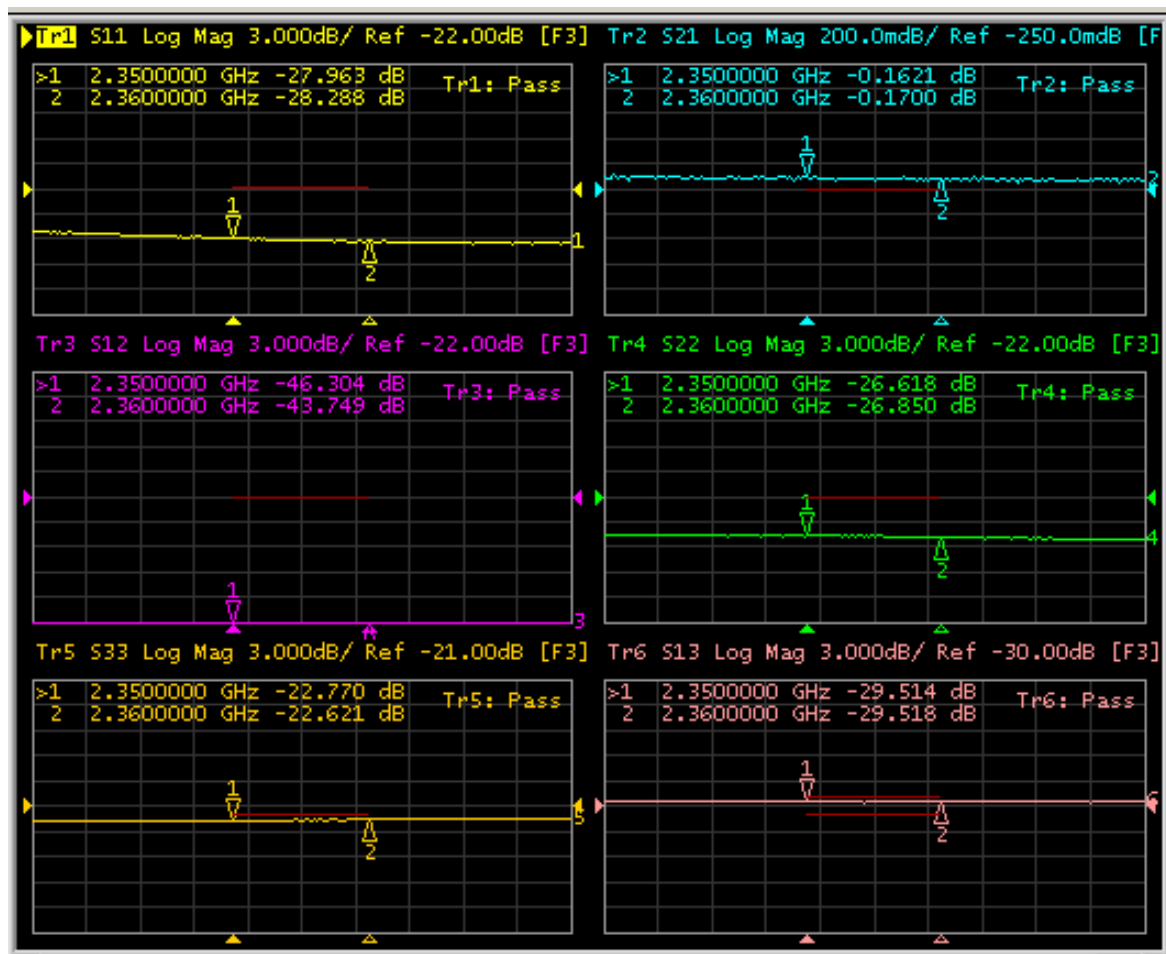

Applications

- Telecom