


# Ka Band Microstrip Isolator

## JIS34K5T35K6G0

### Description:

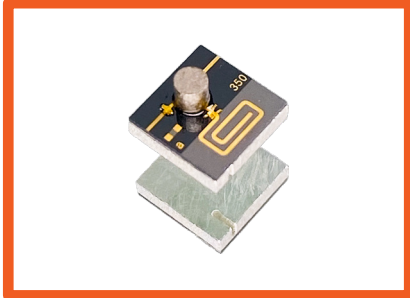


JIS34K5T35K6G0 is a microstrip isolator in the frequency 34.500~35.600GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.90dB and minimum return loss of 17.0dB. It can handle a CW Power FWD/REV/PK(Watt) of 2

### Electrical Specification

| Part Number            | JIS34K5T35K6G0 |
|------------------------|----------------|
| Frequency (GHz)        | 34.500~35.600  |
| Insertion Loss(dB)MAX  | 1.2            |
| Isolation(dB)MIN       | 15.6           |
| Return Loss(dB)MIN     | 17.0           |
| Operating Temperature  | -40~+85        |
| Power FWD/REV/PK(Watt) | 2              |


### Outline

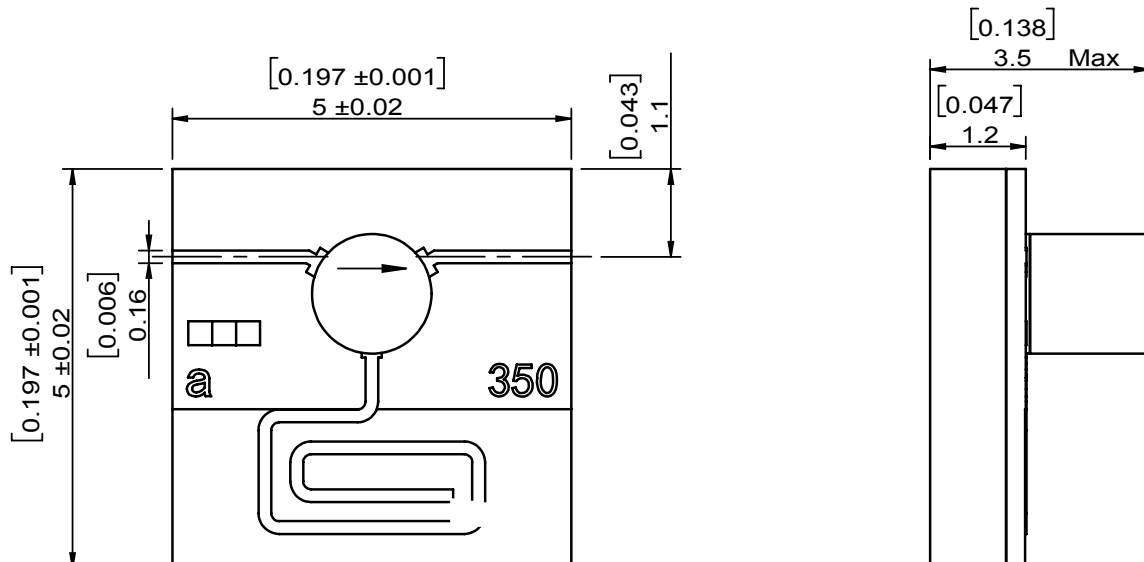

# Ka Band Microstrip Isolator

JIS34K5T35K6G0

## Test Data

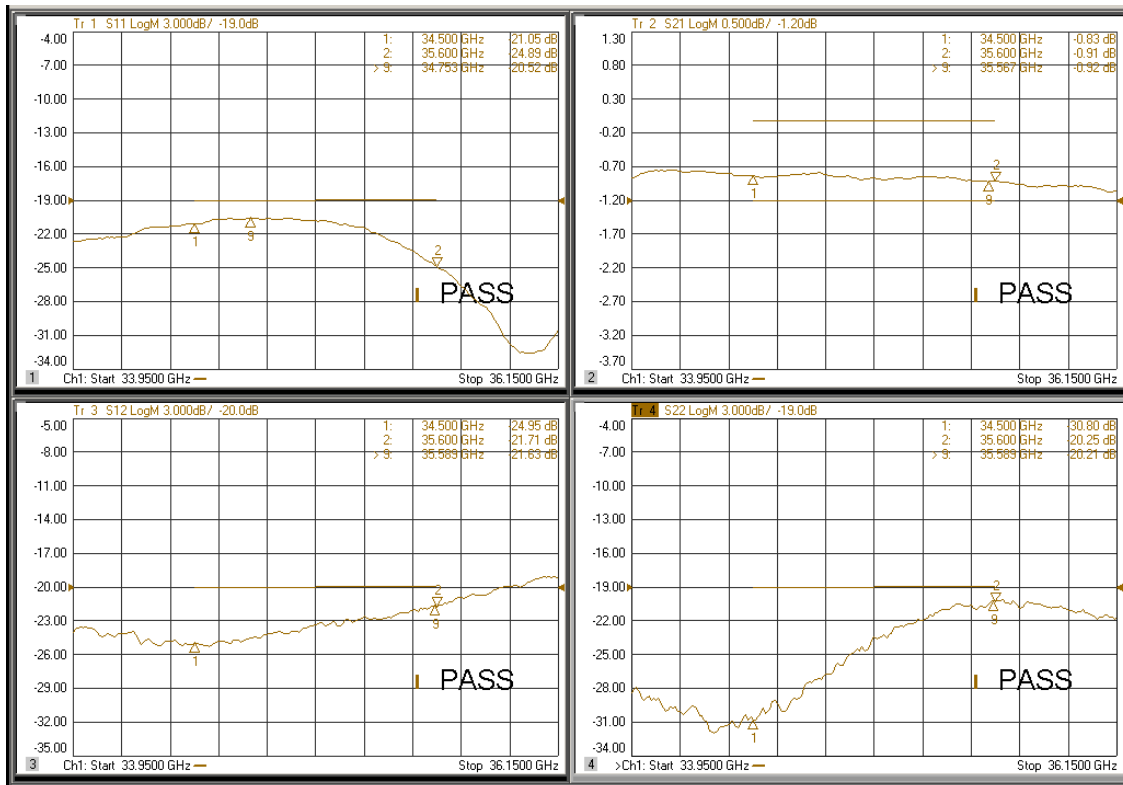

## Applications

- Radar