

UHF Band Coaxial Circulator

JCC0430T0440N10

Description:




JCC0430T0440N10 is a coaxial circulator in the frequency 0.430~0.440GHz. The device is extremely stable over the temperature range of -30°C to +70°C, with maximum insertion loss of 0.25dB and minimum return loss of 20.0dB. This circulator can handle a CW Power FWD/REV/PK(Watt) of 100/100/-

Electrical Specification

Part Number	JCC0430T0440N10
Frequency (GHz)	0.430~0.440
Insertion Loss(dB)MAX	0.25
Isolation(dB)MIN	25.0
Return Loss(dB)MIN	20.0
Operating Temperature	-30°C~70°C
Power FWD/REV/PK(Watt)	100/100/-


Outline

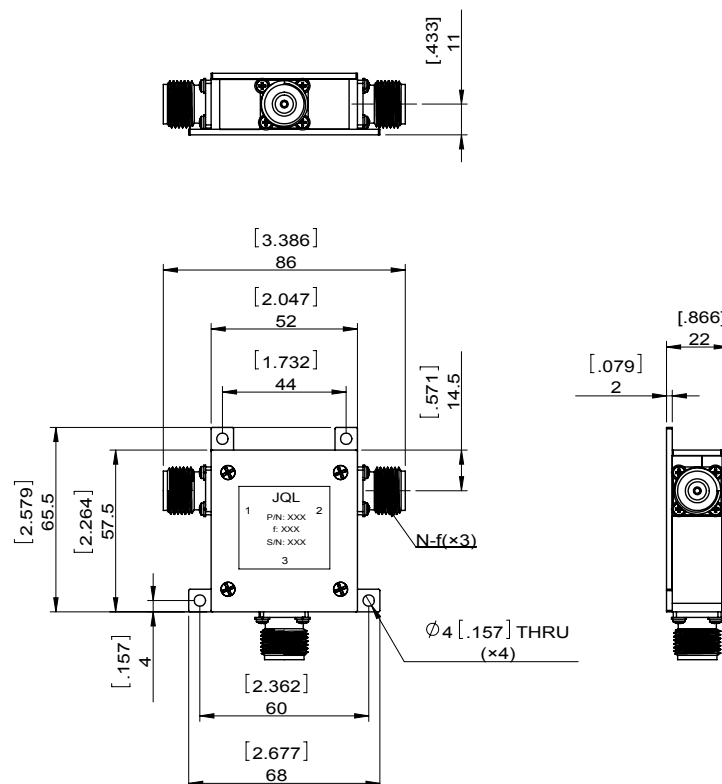

UHF Band Coaxial Circulator

JCC0430T0440N10

Test Data

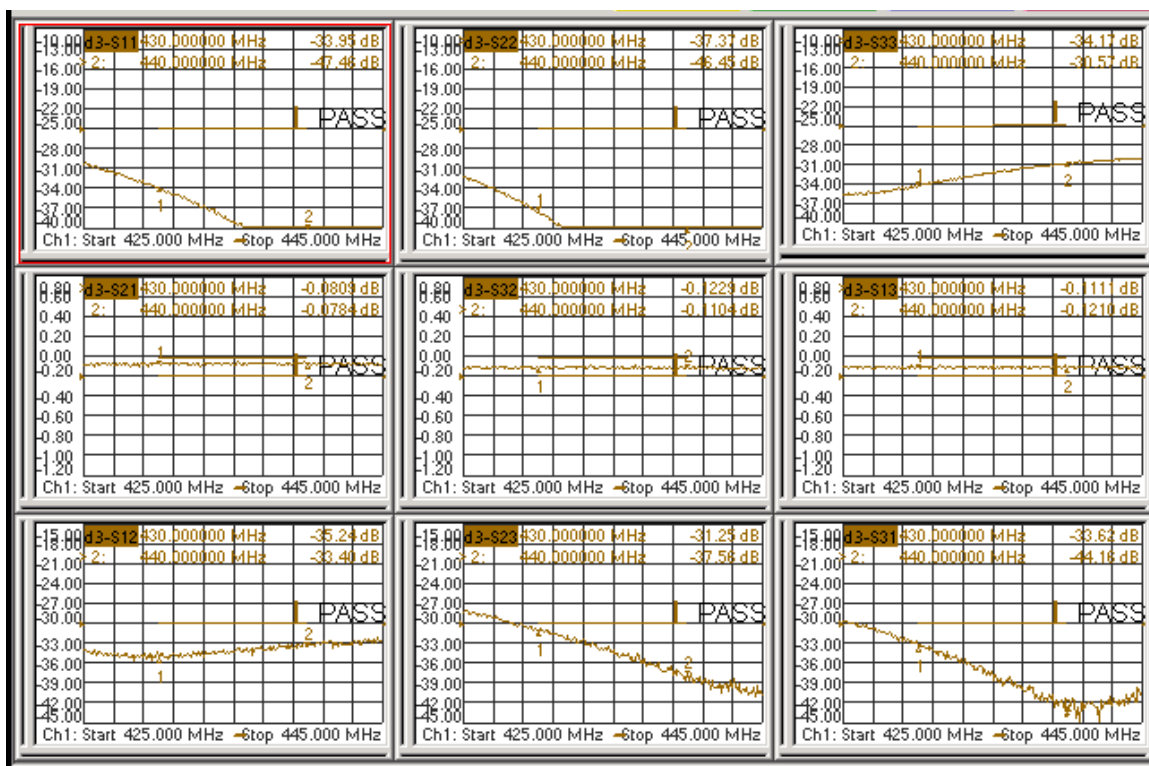

Applications

- Public Safety