

L Band Surface Mount Isolator

JIM2200T2700PW0

Description:




JIM2200T2700PW0 is a surface mount isolator in the frequency 2.200~2.700GHz. The device is extremely stable over the temperature range of -40°C to +55°C, with maximum insertion loss of 0.6dB and minimum return loss of 16.0dB. It can handle a CW Power FWD/REV/PK(Watt) of 1/1/-

Electrical Specification

Part Number	JIM2200T2700PW0
Frequency (GHz)	2.200~2.700
Insertion Loss(dB)MAX	0.6
Isolation(dB)MIN	16.0
Return Loss(dB)MIN	16.0
Operating Temperature	-40°C~55°C
Power FWD/REV/PK(Watt)	1/1/-


Outline

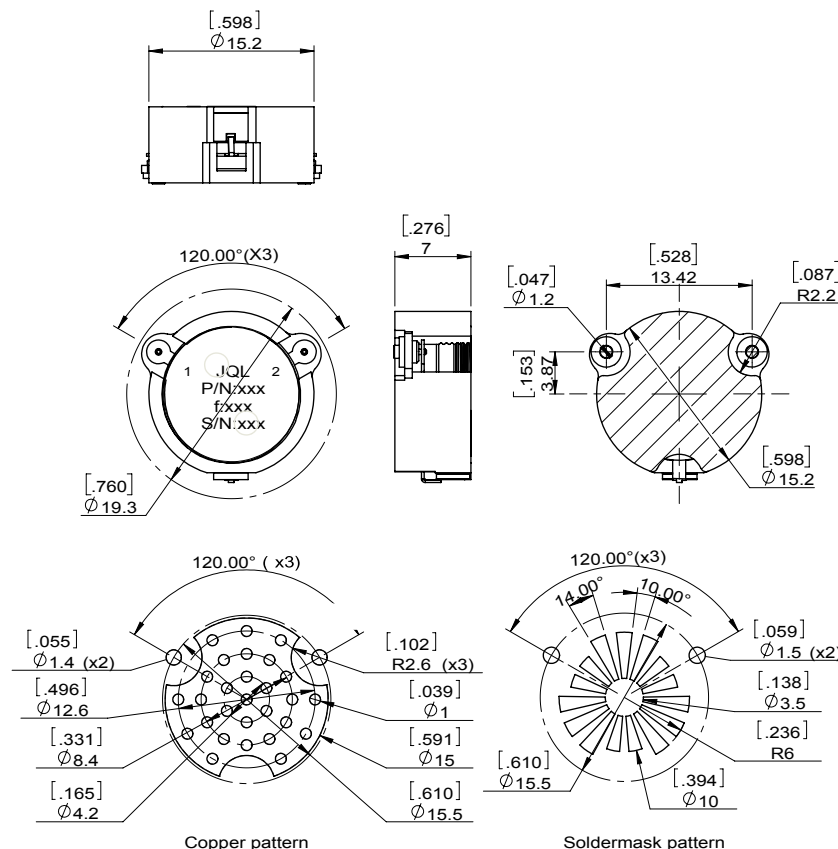

L Band Surface Mount Isolator

JIM2200T2700PW0

Test Data

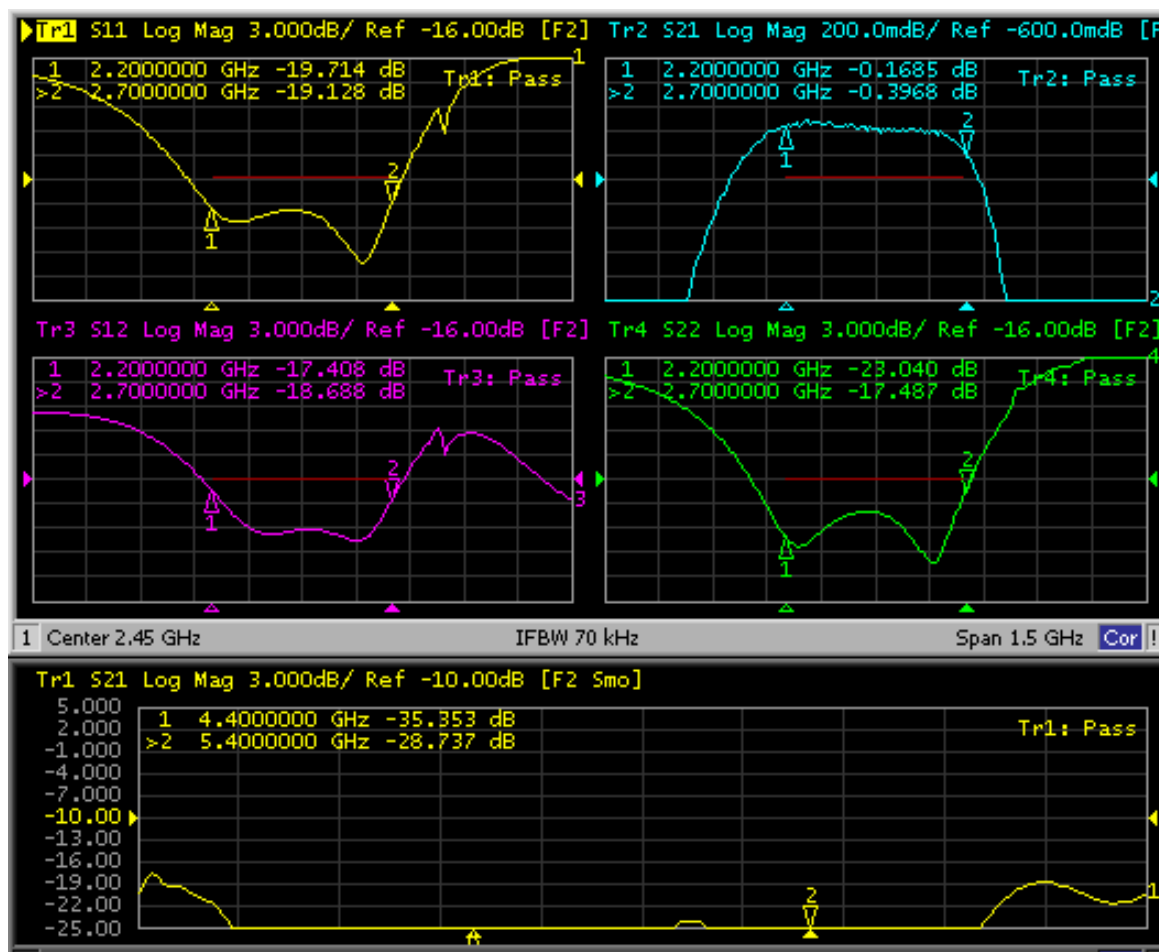

Applications

- Telecom