

UHF Band Dual Coaxial Circulator

JC2C0410T0470S10

Description:




JC2C0410T0470S10 is a dual coaxial circulator in the frequency 0.410~0.470GHz. The device is extremely stable over the temperature range of -30°C to +60°C, with maximum insertion loss of 0.45 and minimum return loss of 22.0dB. It can handle a CW Power FWD/REV/PK(Watt) of 100/100/-

Electrical Specification

Part Number	JC2C0410T0470S10
Frequency (GHz)	0.410~0.470
Insertion Loss(dB)MAX	0.45
Isolation(dB)MIN	45.0
Return Loss(dB)MIN	22.0
Operating Temperature	-30°C~60°C
Power FWD/REV/PK(Watt)	100/100/-


Outline

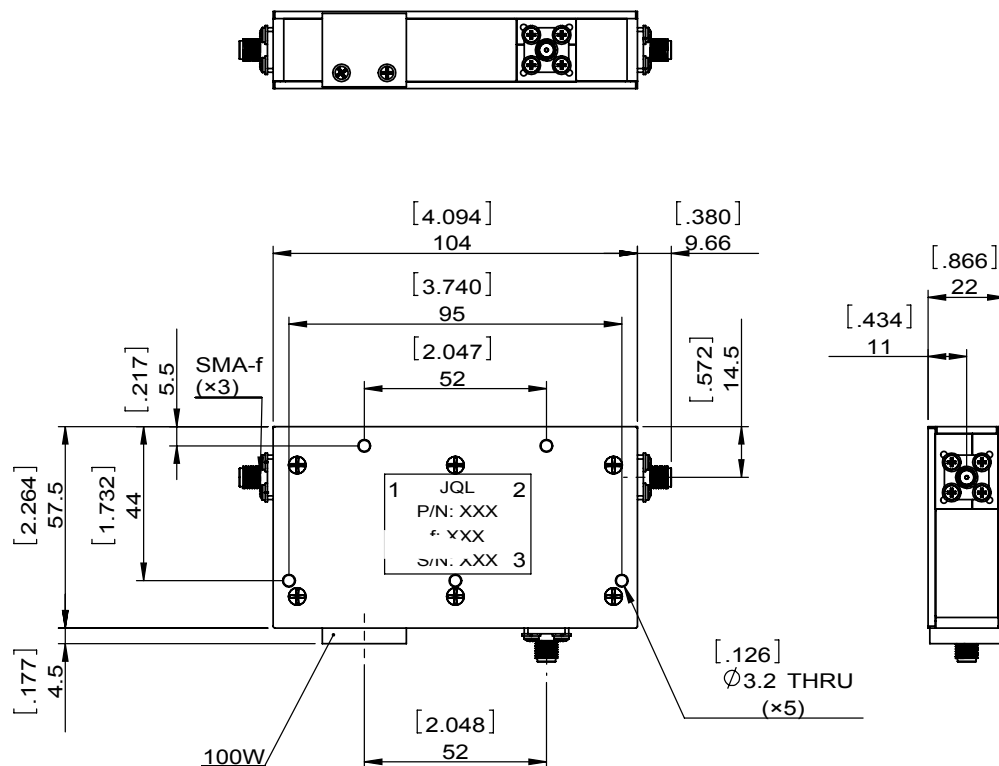

UHF Band Dual Coaxial Circulator

JC2C0410T0470S10

Test Data

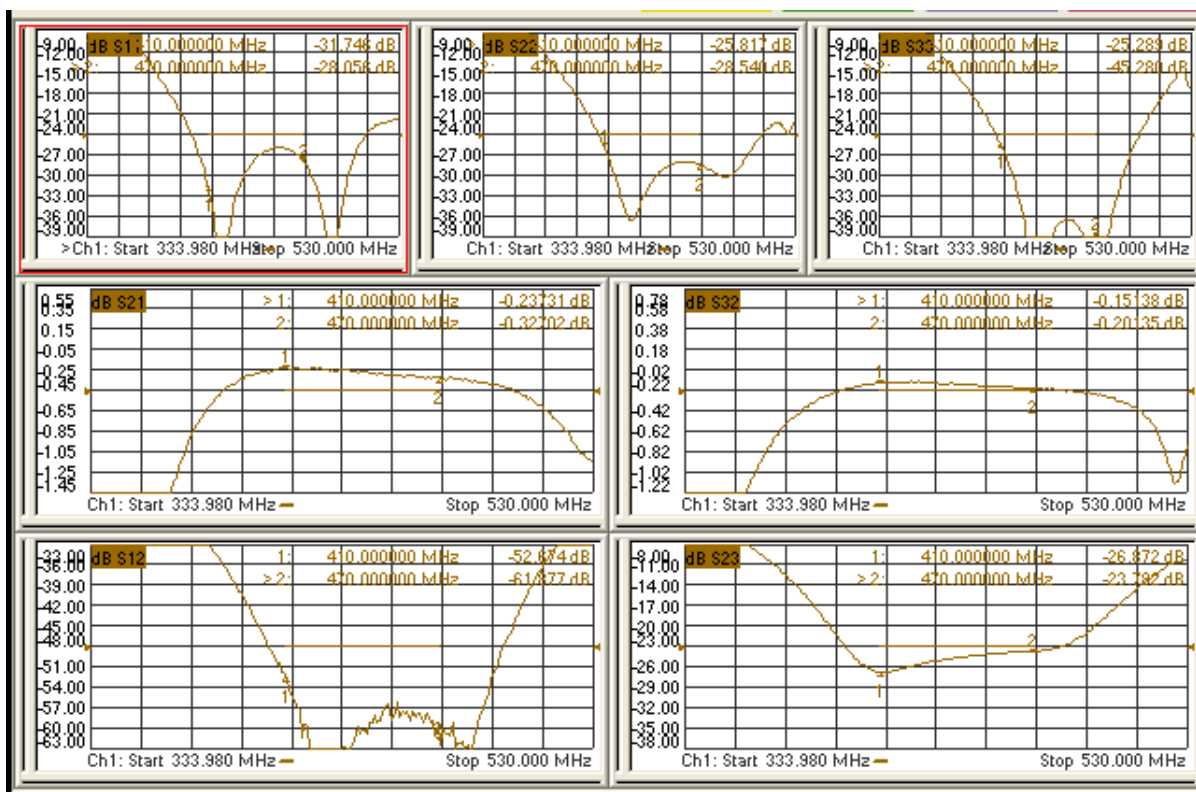

Applications

- Public Safety