

UHF Band Coaxial Circulator

JCC0270T0320N30

Description:




JCC0270T0320N30 is a coaxial circulator in the frequency 0.270-0.320GHz. The device is extremely stable over the temperature range of +15°C to +30°C, with maximum insertion loss of 0.5dB and minimum return loss of 15.6dB. This circulator can handle a CW Power FWD/REV/P-K(Watt) of 300/-/1500,Pulse 20-50us/PRF 1 KHZ

Electrical Specification

Part Number	JCC0270T0320N30
Frequency (GHz)	0.270-0.320
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	16.0
Return Loss(dB)MIN	15.6
Operating Temperature	+15°C~30°C
Power FWD/REV/PK(Watt)	300/-/1500,Pulse 20-50us/PRF 1 KHZ


Outline

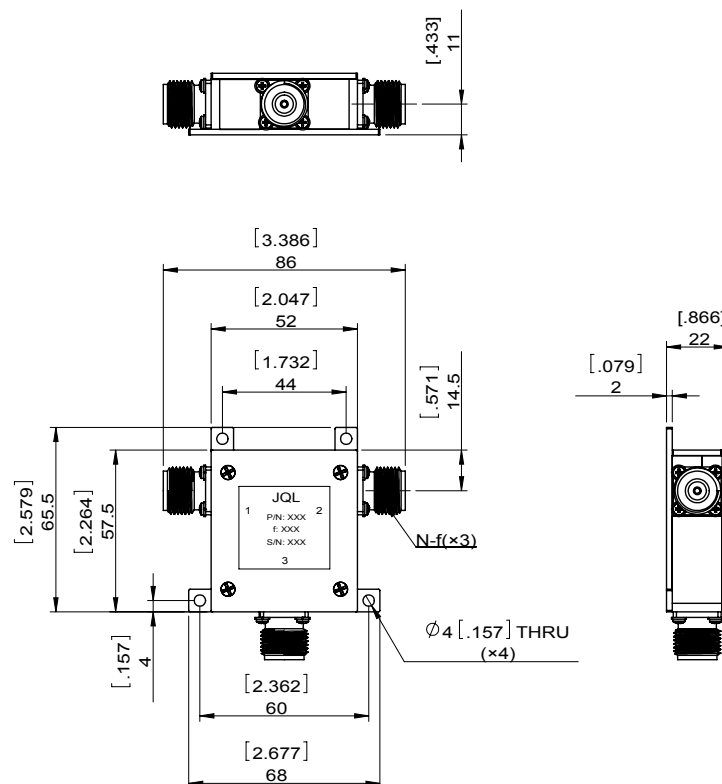

UHF Band Coaxial Circulator

JCC0270T0320N30

Test Data

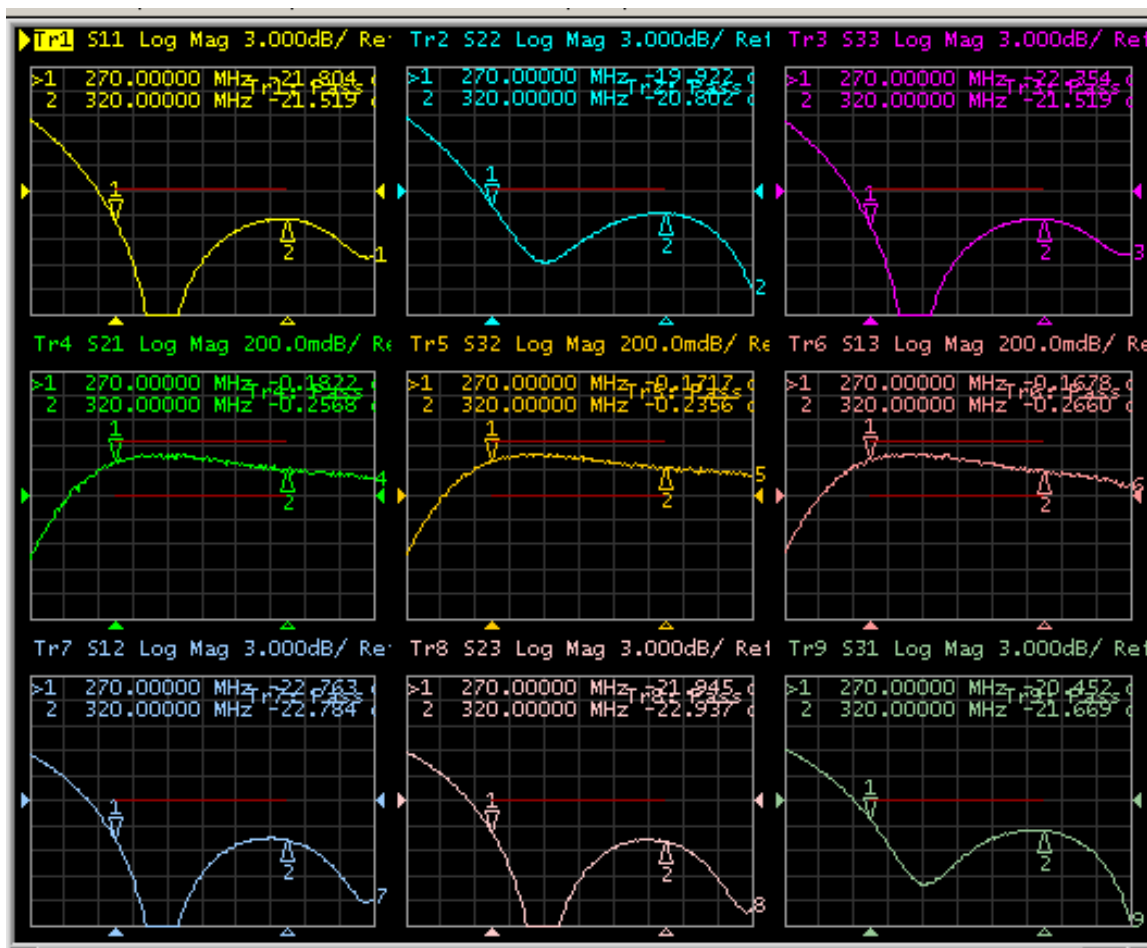

Applications

- Public Safety