


UHF Band Coaxial Circulator

JCC0768T0776NF

Description:

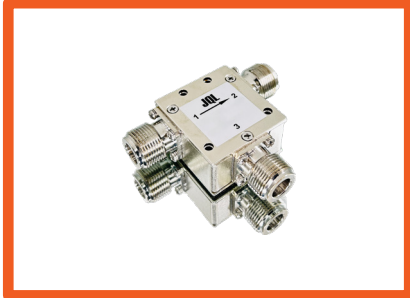


JCC0768T0776NF is a coaxial circulator in the frequency 0.768~0.776GHz. The device is extremely stable over the temperature range of -20°C to +75°C, with maximum insertion loss of 0.30dB and minimum return loss of 20.0dB. This circulator can handle a CW Power FWD/REV/PK(Watt) of 150/150/-

Electrical Specification

Part Number	JCC0768T0776NF
Frequency (GHz)	0.768~0.776
Insertion Loss(dB)MAX	0.30
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
Operating Temperature	-20°C~75°C
Power FWD/REV/PK(Watt)	150/150/-


Outline

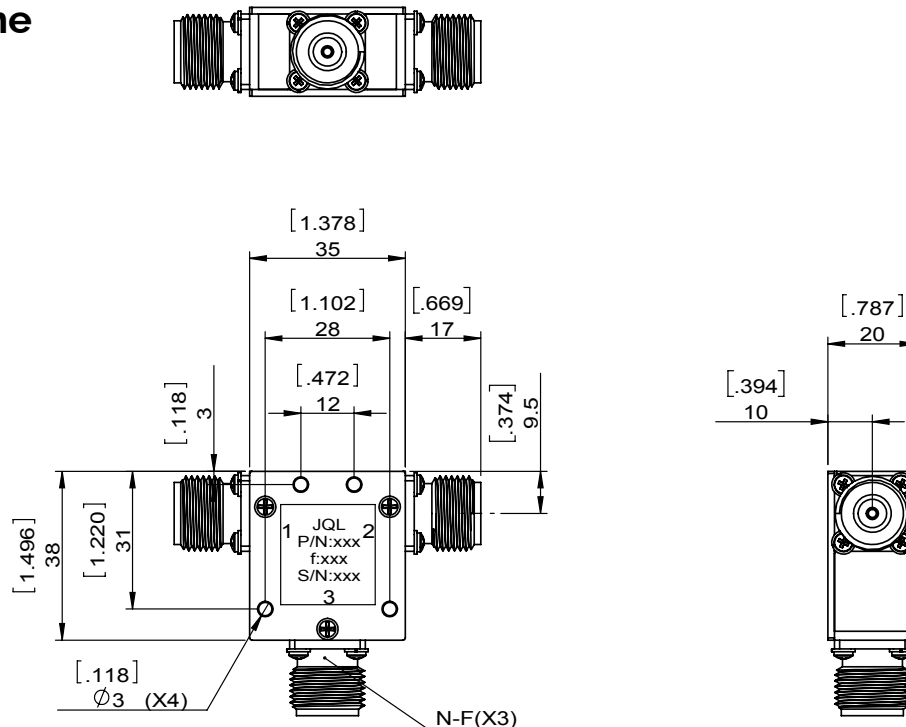

UHF Band Coaxial Circulator

JCC0768T0776NF

Test Data

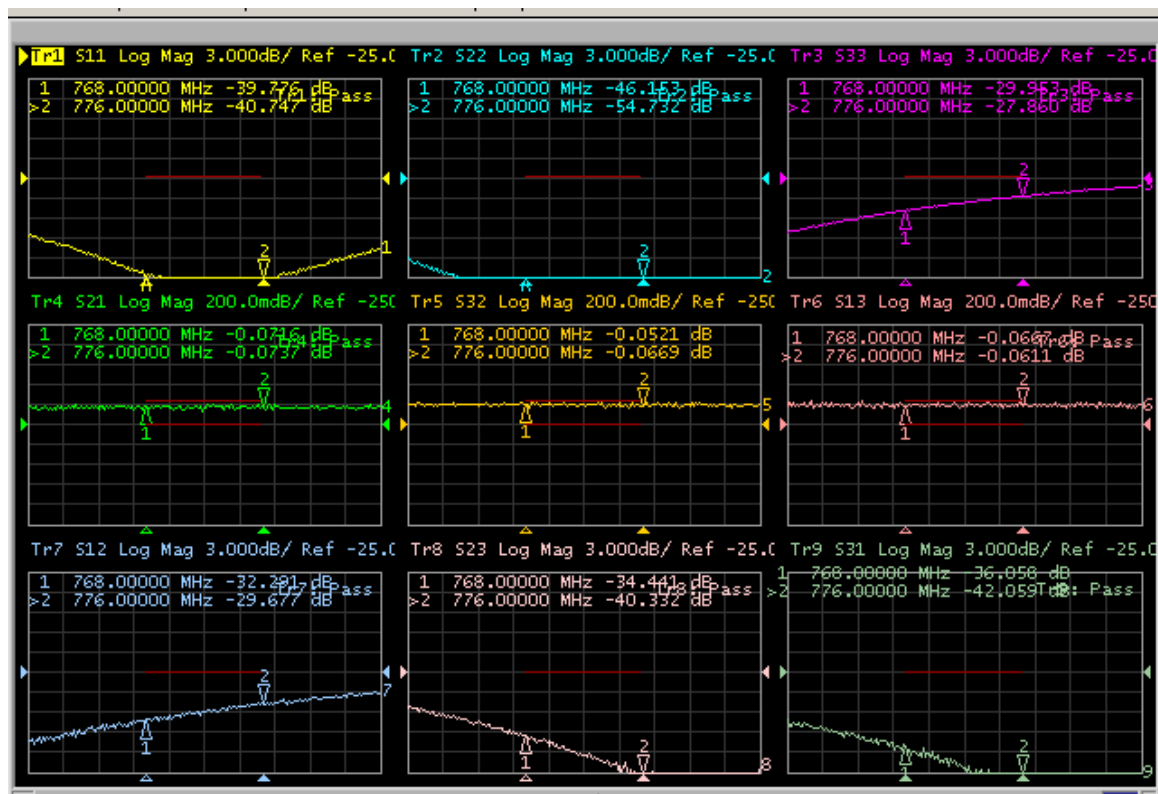

Applications

- Public Safety