

S Band Surface Mount Circulator

JCM2300T2690PT2

Description:




JCM2300T2690PT2 is a surface mount circulator in the frequency 2.300~2.690GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 1.0(0.8Typ)dB and minimum return loss of 15.0(18.0Typ)dB. It can handle a CW Power FWD/REV/PK(Watt) of 20/-/100

Electrical Specification

Part Number	JCM2300T2690PT2
Frequency (GHz)	2.300~2.690
Insertion Loss(dB)MAX	1.0(0.8Typ)
Isolation(dB)MIN	15.0(18.0Typ) 10.0@2240~2750MHz
Return Loss(dB)MIN	15.0(18.0Typ)
Operating Temperature	-40°C~+85°C
Power FWD/REV/PK(Watt)	20/-/100


Outline

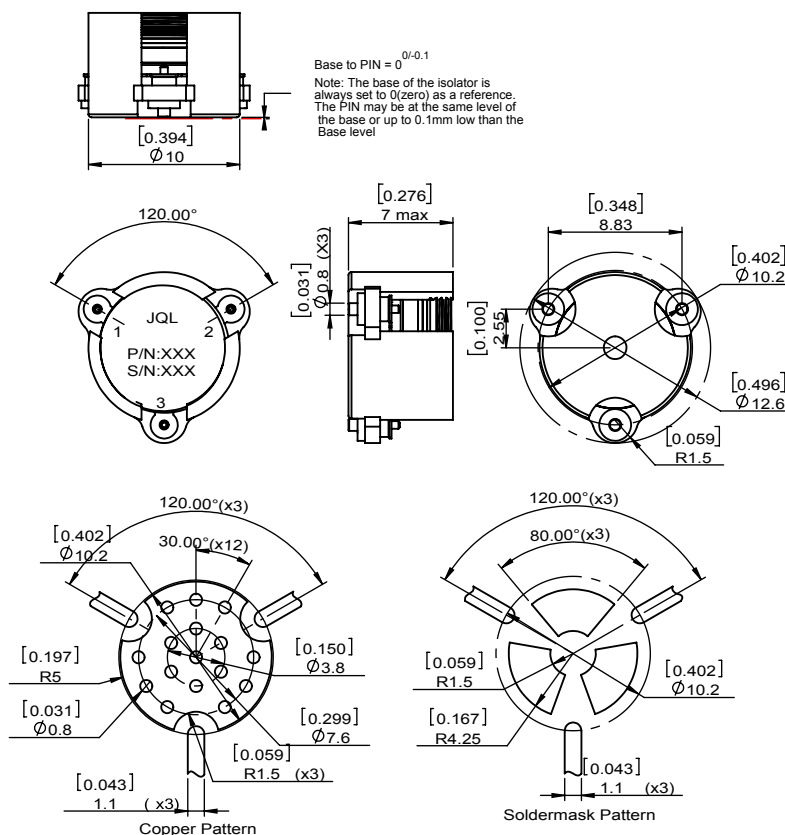

S Band Surface Mount Circulator

JCM2300T2690PT2

Test Data

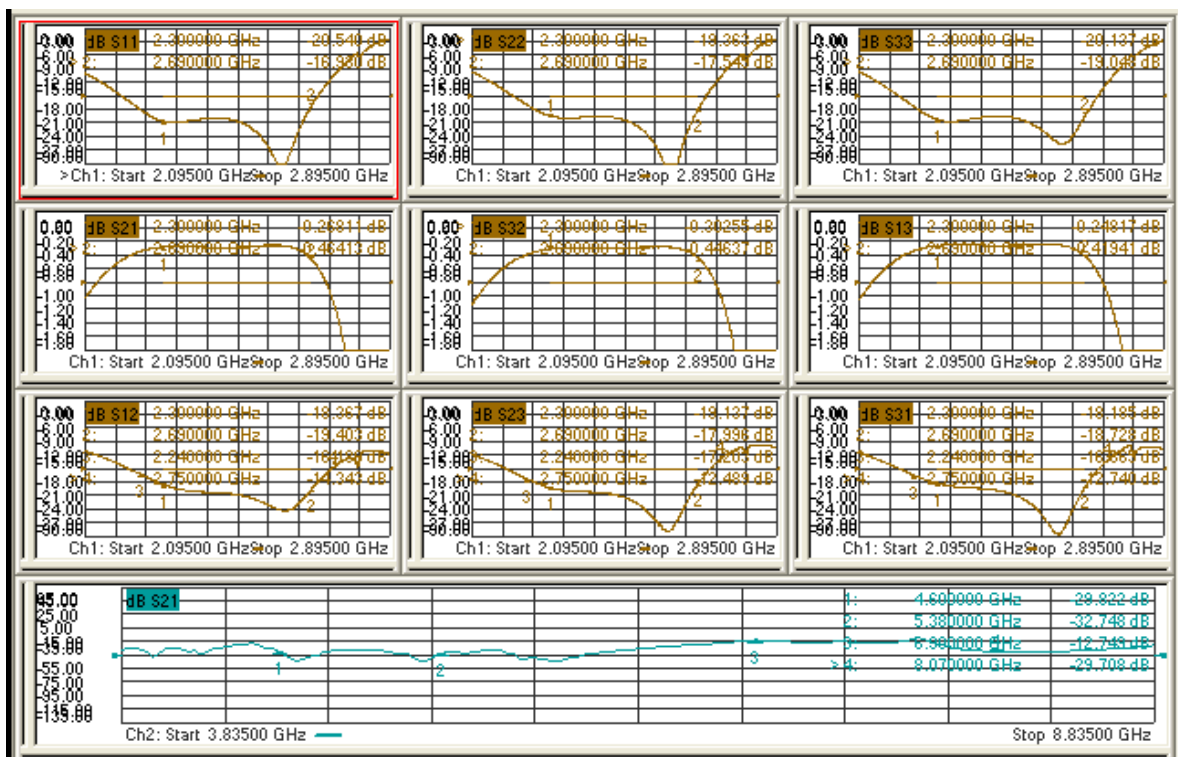

Applications

- Telecom