

S Band Surface Mount Circulator

JCM3400T3800PT2

Description:




JCM3400T3800PT2 is a surface mount circulator in the frequency 3.400~3.800GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.3@+25°C || 0.4@-40~+85°C and minimum return loss of 20.0@+25°C || 18.0@-40~+85°C. It can handle a CW Power FWD/REV/PK(Watt) of 15/15/100

Electrical Specification

Part Number	JCM3400T3800PT2
Frequency (GHz)	3.400~3.800
Insertion Loss(dB)MAX	0.3@+25°C 0.4@-40~+85°C
Isolation(dB)MIN	20.0@+25°C 18.0@-40~+85°C
Return Loss(dB)MIN	20.0@+25°C 18.0@-40~+85°C
Operating Temperature	-40°C~+85°C
Power FWD/REV/PK(Watt)	15/15/100


Outline

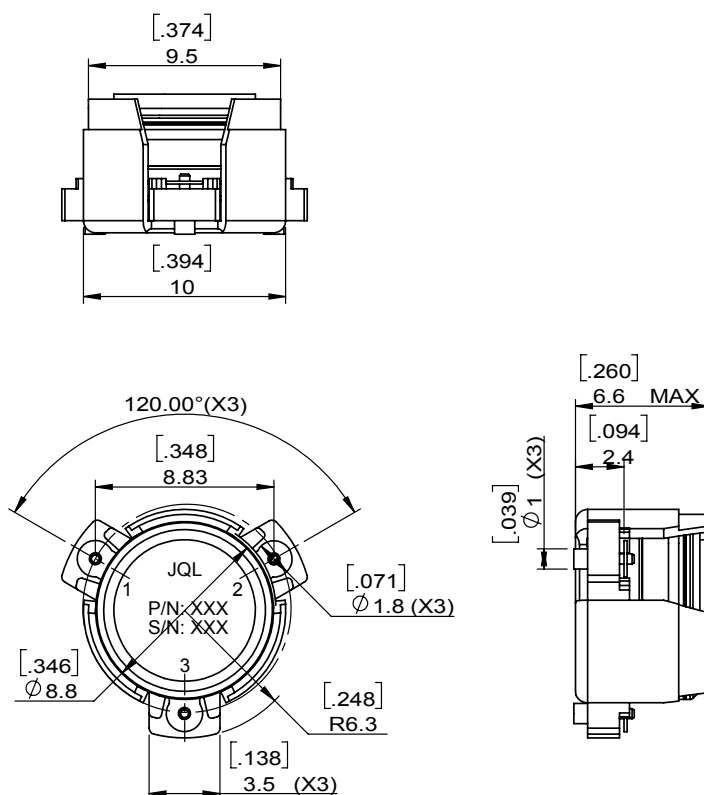

S Band Surface Mount Circulator

JCM3400T3800PT2

Test Data

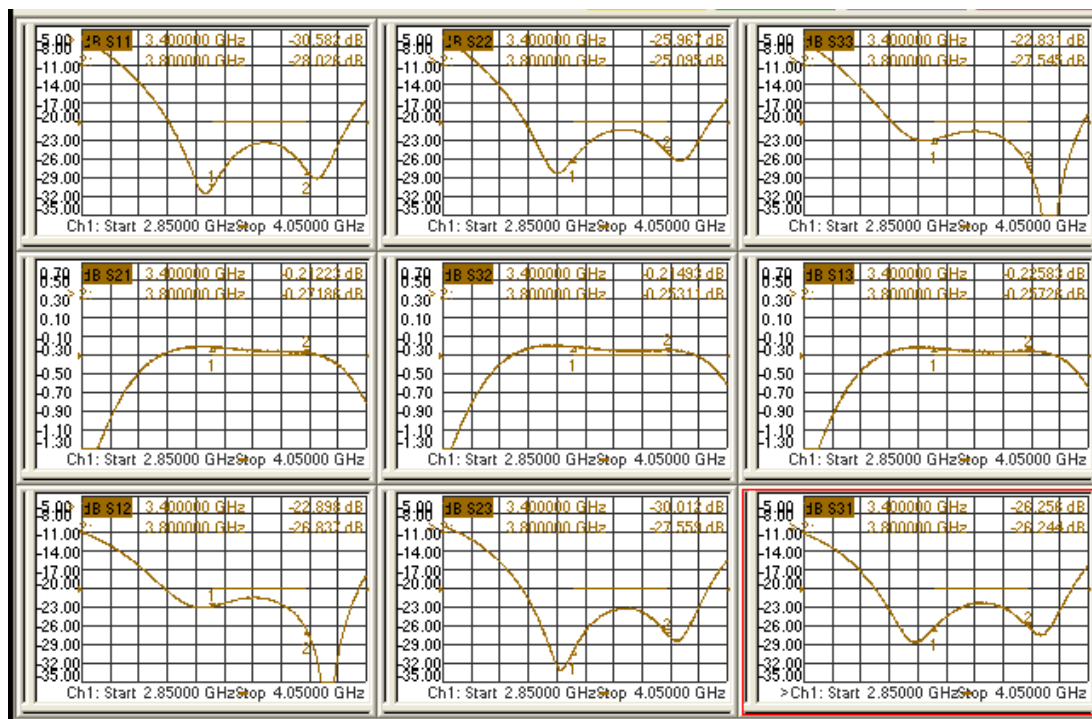

Applications

- Telecom