

X Band Surface Mount Circulator

JCM8500T10K5XM2

Description:




JCM8500T10K5XM2 is a surface mount circulator in the frequency 8.500~10.500 GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.50 @25°C || 0.70 @-40~+85°C and minimum return loss of 18.0 @25°C || 17.0 @-40~+85°C. It can handle a CW Power FWD/REV/PK(Watt) of 20/20/20 20% duty cycle and 100 usec

Electrical Specification

Part Number	JCM8500T10K5XM2
Frequency (GHz)	8.500~10.500
Insertion Loss(dB)MAX	0.5@25°C 0.7@-40~+85°C
Isolation(dB)MIN	18.0 @25°C 17.0 @-40~+85°C
Return Loss(dB)MIN	18.0 @25°C 17.0 @-40~+85°C
Operating Temperature	-40°C~+85°C
Power FWD/REV/PK(Watt)	20/20/20 20% duty cycle and 100 usec


Outline

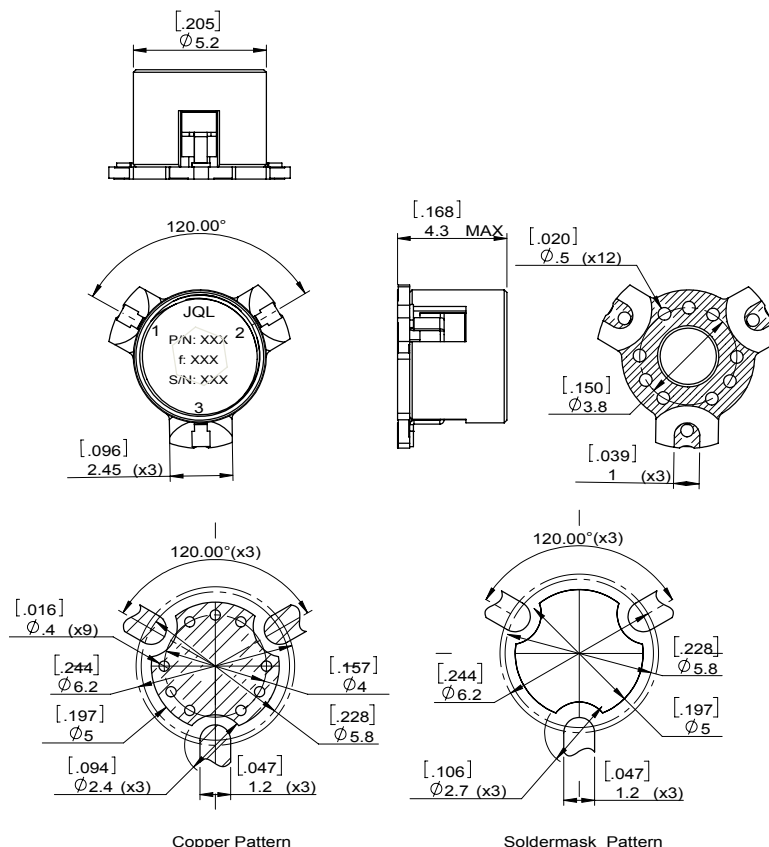

X Band Surface Mount Circulator

JCM8500T10K5XM2

Test Data

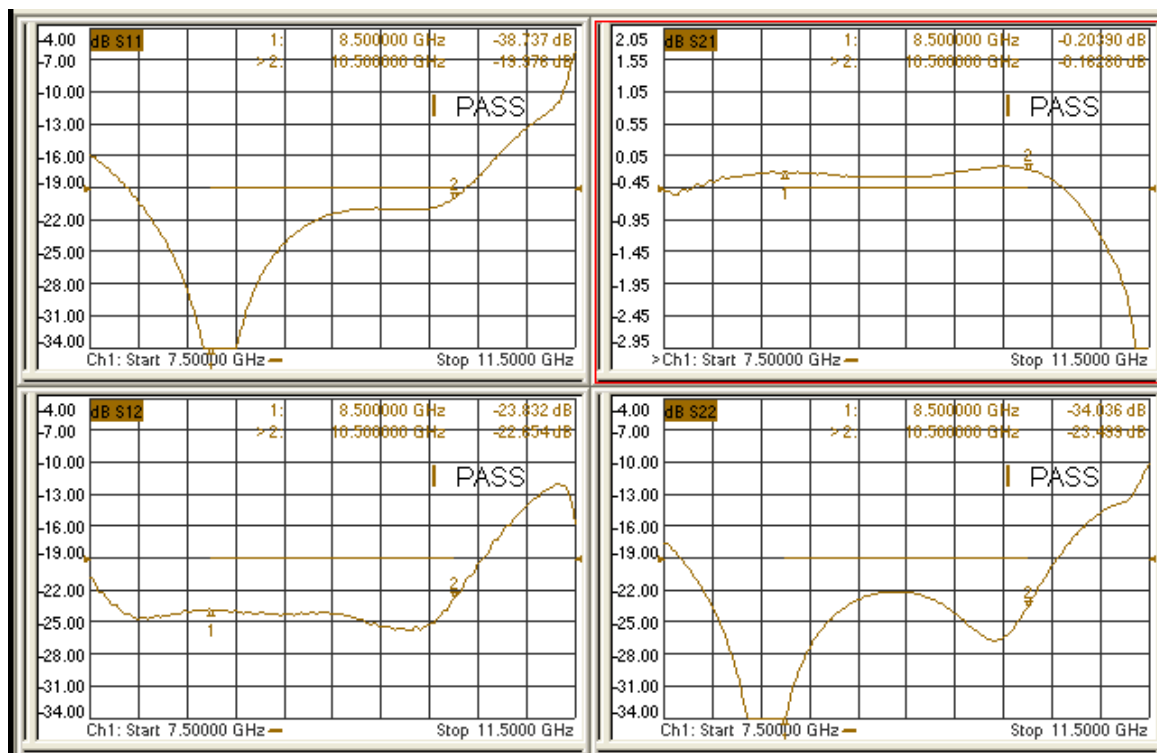

Applications

- Radar