

S Band Drop-In Circulator

JCD2300T2400SM20C

Description:




JCD2300T2400SM20C is a drop-in circulator in the frequency 2.300~2.400 GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.25dB and minimum return loss of 22.0dB. It can handle CCW Power FWD/REV/PK(Watt) of 200/200/300

Electrical Specification

Part Number	JCD2300T2400SM20C
Frequency (GHz)	2.300~2.400
Insertion Loss(dB)MAX	0.25
Isolation(dB)MIN	22.0
Return Loss(dB)MIN	22.0
Operating Temperature	-40°C~85°C
Power Handling(Watt)	200/200/300
Tab(W×LG×THK)(mm[Inch])	1.0[.039]x2.5[.098]x0.2[.008]


Outline

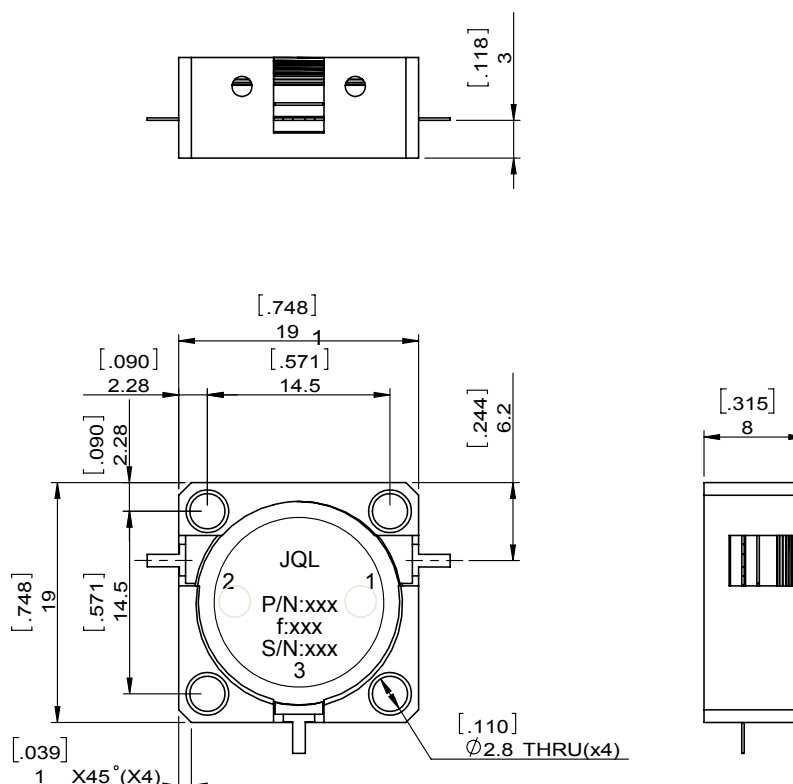

S Band Drop-In Circulator

JCD2300T2400SM20C

Test Data

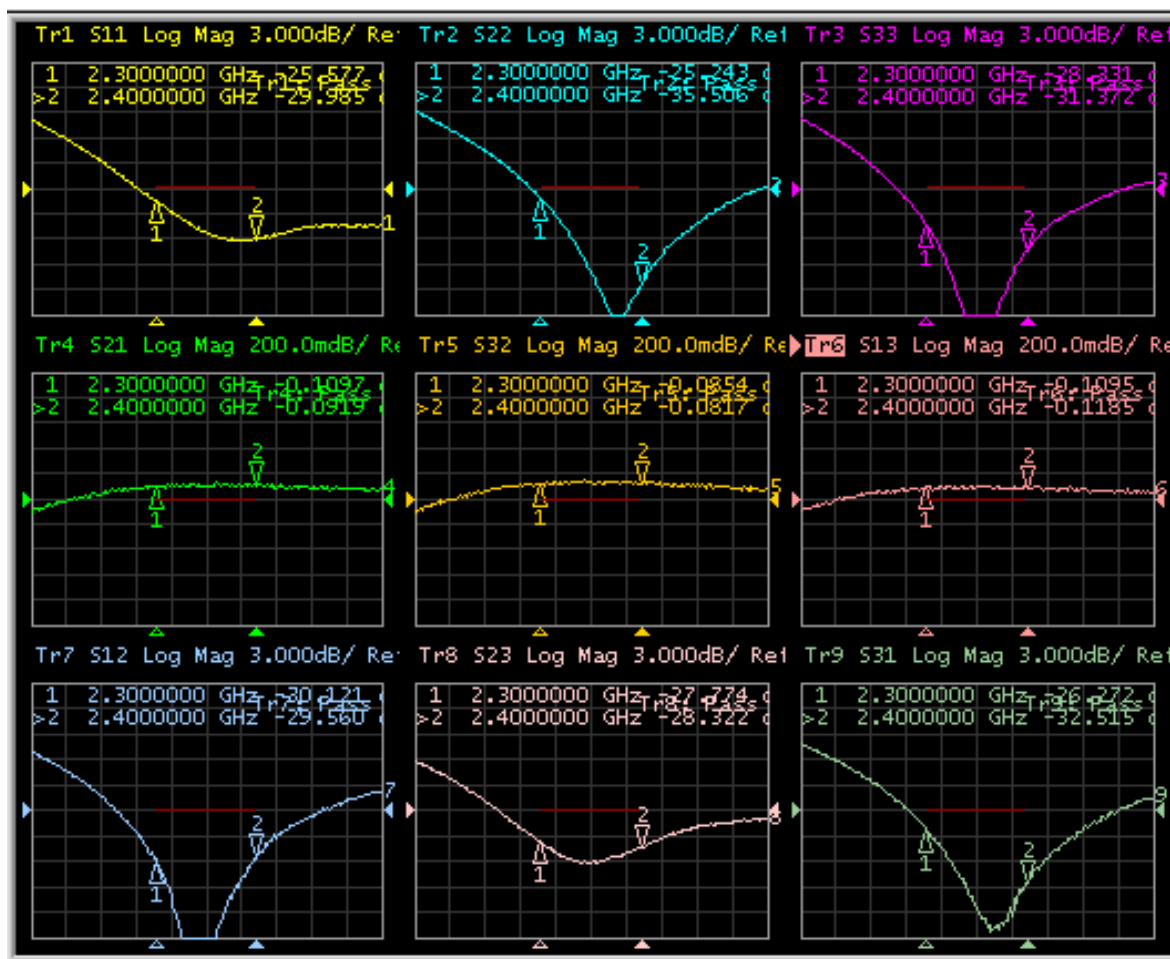

Applications

- Industrial