

1.805~2.17GHz Surface Mount Circulator

JCM1805T2170PT1R

Description:




JCM1805T2170PT1R is a surface mount circulator in the frequency 1.805~2.170GHz. The device is extremely stable over the temperature range of -20°C to +70°C, with maximum insertion loss of 0.70dB and minimum return loss of 15.0dB. This circulator can handle a CW Power FWD/REV/PK(Watt) of 10/10/-

Electrical Specification

Part Number	JCM1805T2170PT1R
Frequency (MHz)	1.805~2.170
Insertion Loss(dB)MAX	0.70
Isolation(dB)MIN	15.0
Return Loss(dB)MIN	15.0
Operating Temperature	-20°C~+70°C
Power FWD/REV/PK(Watt)	10/10/-


Outline

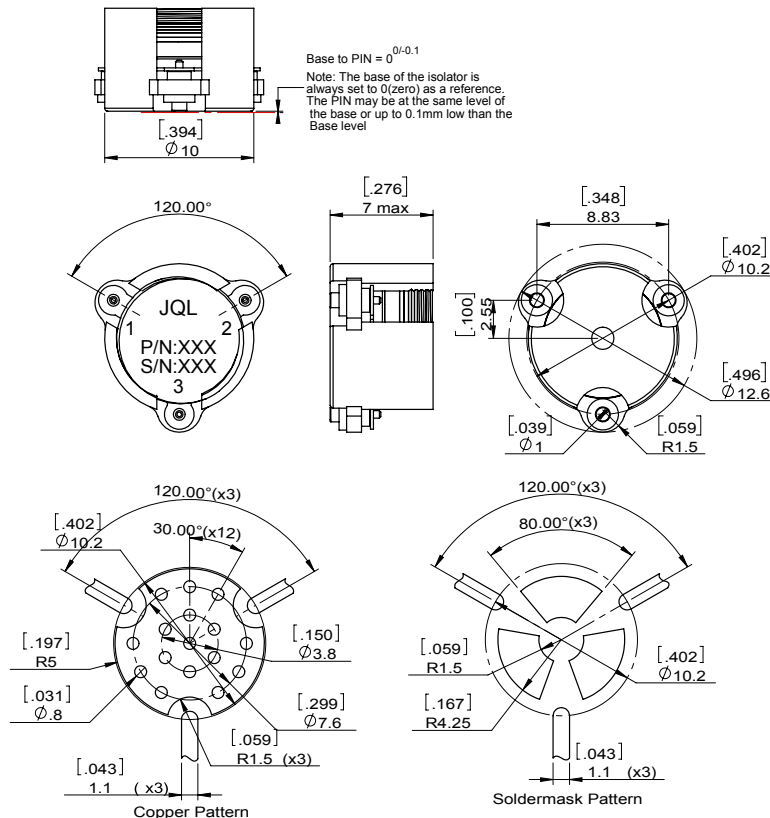

1.805~2.17GHz Surface Mount Circulator

JCM1805T2170PT1R

Test Data

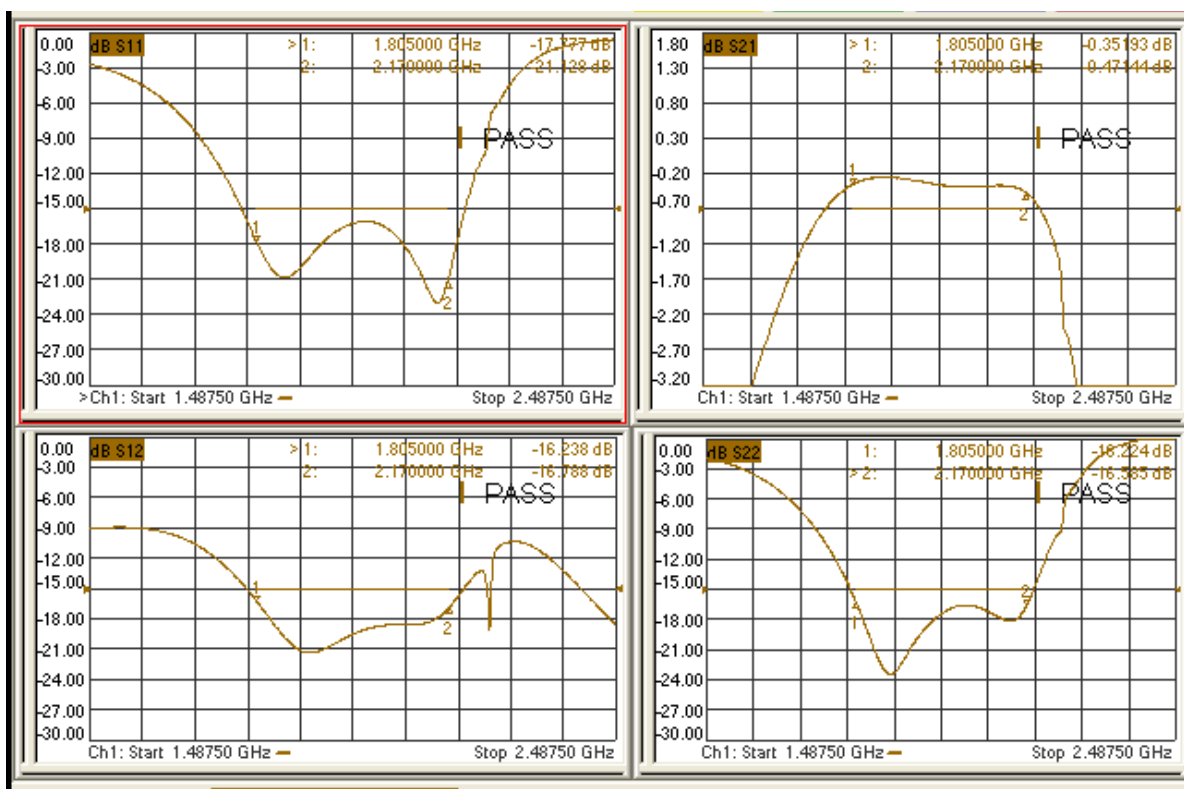

Applications

- Telecom