

L Band Dual Coaxial Isolator

J12C1200T1400N30

Description:




J12C1200T1400N30 is a dual coaxial Isolator in the frequency 1.200~1.400GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.3@S21 || 0.6@S32 dB and minimum return loss of 20.0@S11、S22、S33 || 6.0@S11(1.4~1.6GHZ) dB. It can handle CW Power FWD/REV/PK(Watt) of 300/30/3000

Electrical Specification

Part Number	J12C1200T1400N30
Frequency (GHz)	1.200~1.400
Insertion Loss(dB)MAX	0.3@S21 0.6@S32
Isolation(dB)MIN	20.0@S12、S13、S31 40.0@S23
Return Loss(dB)MIN	20.0@S11、S22、S33 6.0@S11(1.4~1.6GHZ)
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	300/30/3000


Outline

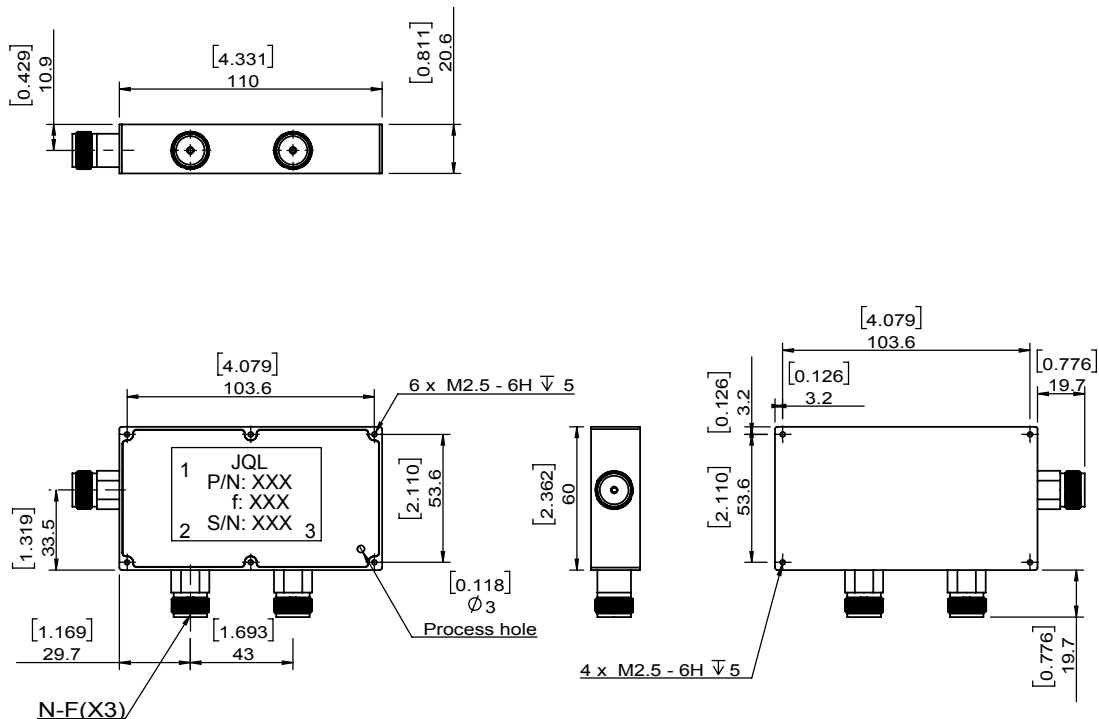

L Band Dual Coaxial Isolator

J12C1200T1400N30

Test Data

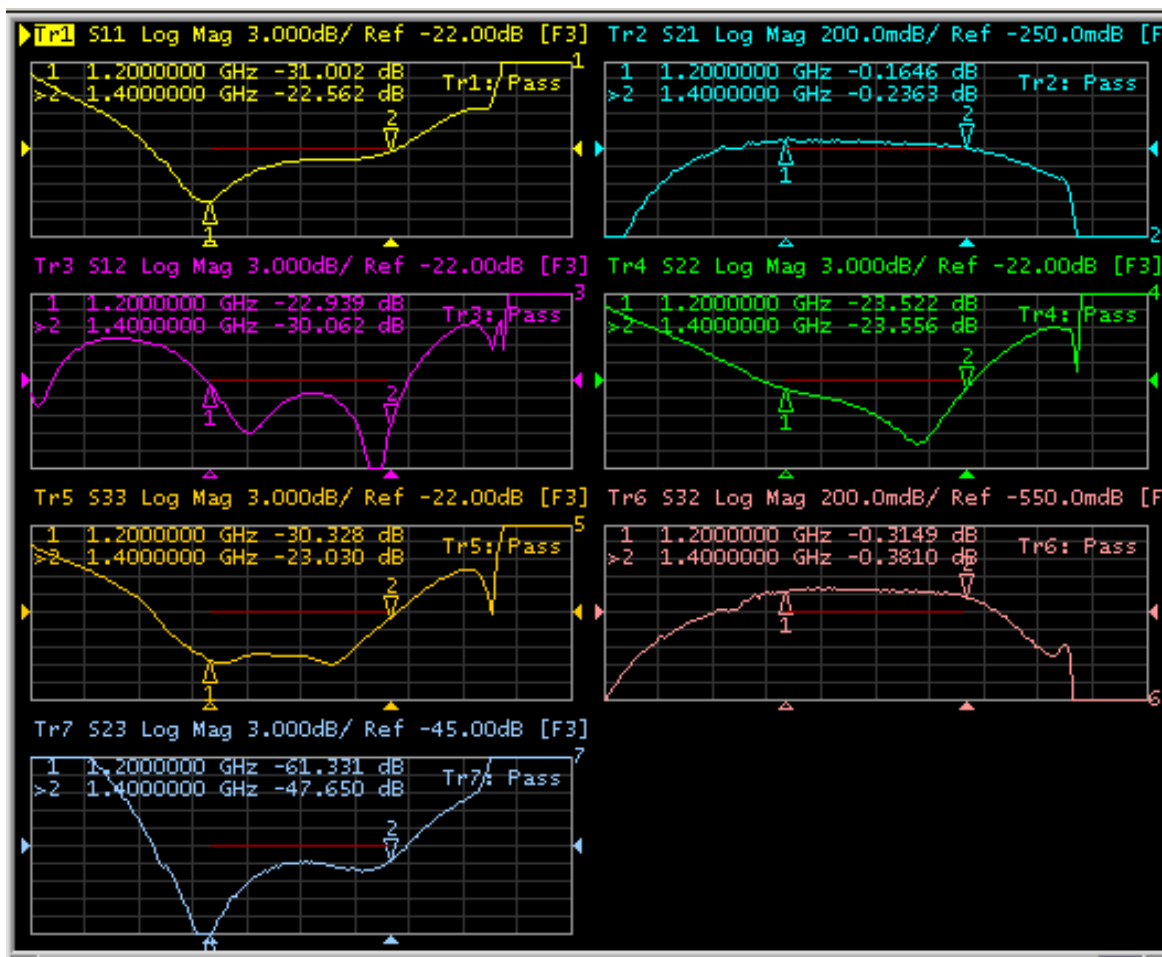

Applications

- Radar