

UHF Band Drop-In Isolator

JID0290T0320KM20RC

Description:




JID0290T0320KM20RC is a drop-in Isolator in the frequency 0.290~0.320 GHz. The device is extremely stable over the temperature range of -20°C to +70°C, with maximum insertion loss of 0.35 || 18.0(1.100~1.700GHZ) and minimum return loss of 18.0dB. It can handle CW Power FWD/REV/PK(Watt) of 250/200/250

Electrical Specification

Part Number	JID0290T0320KM20RC
Frequency (GHz)	0.290~0.320
Insertion Loss(dB)MAX	0.35 18.0(1.100~1.700GHZ)
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	18.0
Operating Temperature	-20°C~70°C
Power FWD/REV/PK(Watt)	250/200/250
Tab(W×LG×THK)(mm[Inch])	1.3[.05]×3.0[.012]×0.4[.016]


Outline

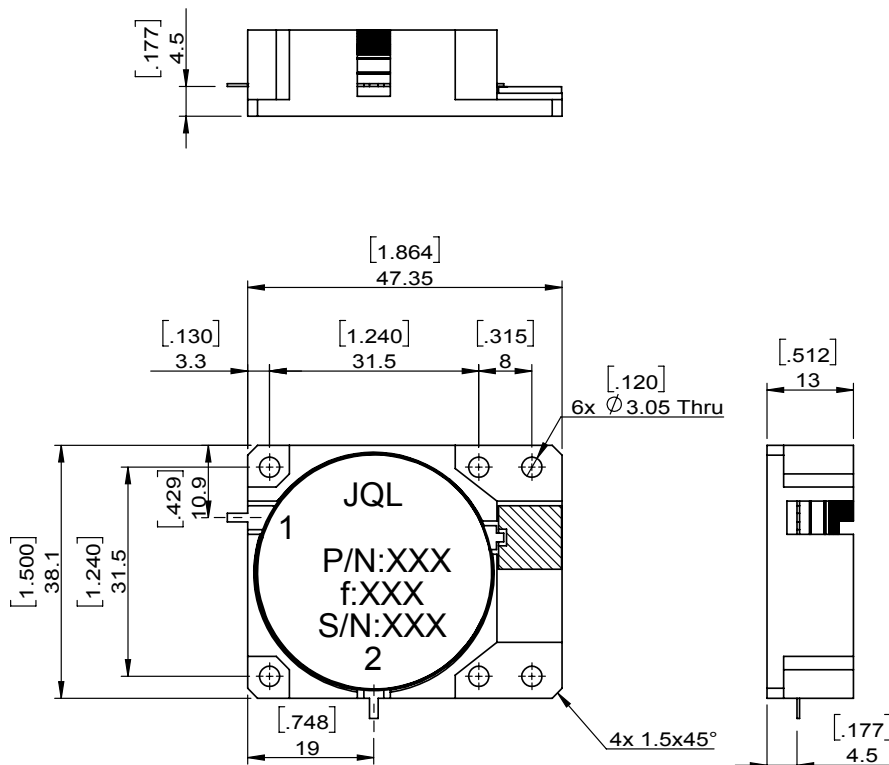

UHF Band Drop-In Isolator

JID0290T0320KM20RC

Test Data

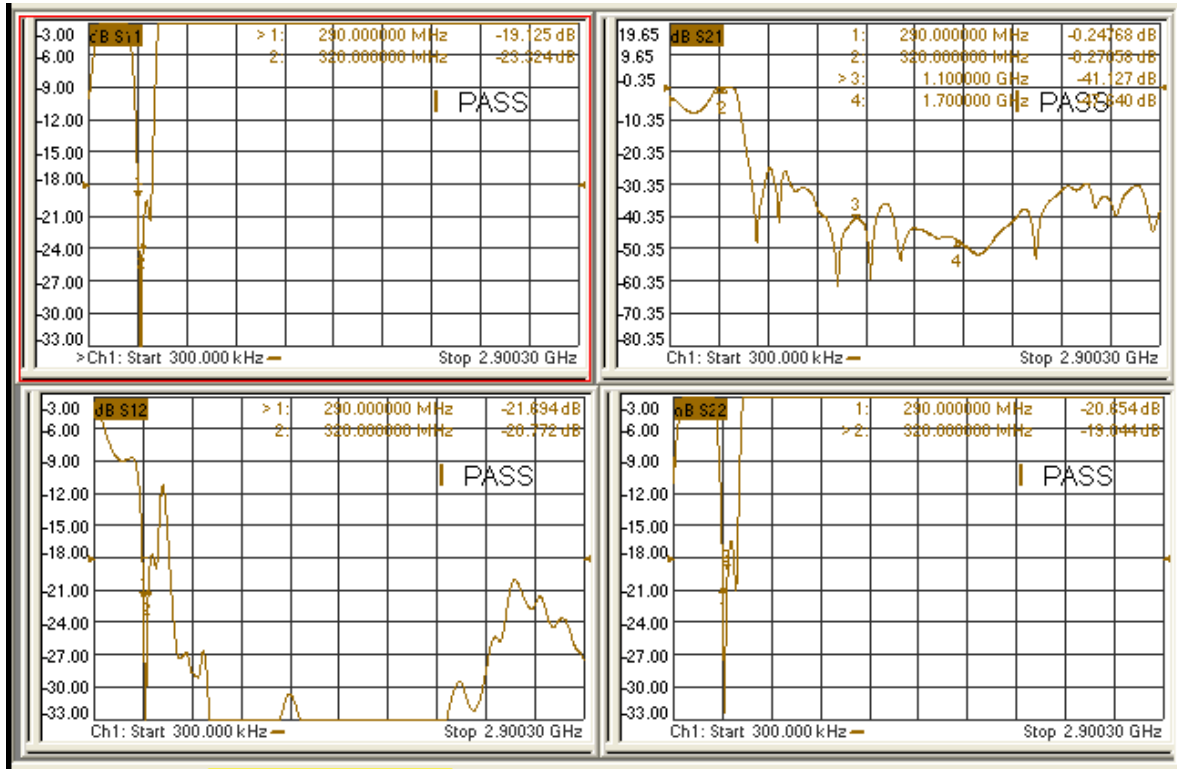

Applications

- Public Safety