

JID1350T1500M10A3

JID1350T1500M10A3 is a drop-in isolator in the frequency 1.350~1.500GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.25dB and minimum return loss of 22.0dB. It can handle a CW Power FWD/REV/PK(Watt) of 100/100/-


Part Number	JID1350T1500M10A3
Frequency (GHz)	1.350~1.500
Insertion Loss(dB)MAX	0.25
Isolation(dB)MIN	22.0
Return Loss(dB)MIN	22.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	100/100/-
Tab(W×LG×THK)(mm[Inch])	1.0[.039]×2.5[.098]×0.2[.008]

[illegible]

L Band Drop in Isolator

JID1350T1500M10A3

Test Data

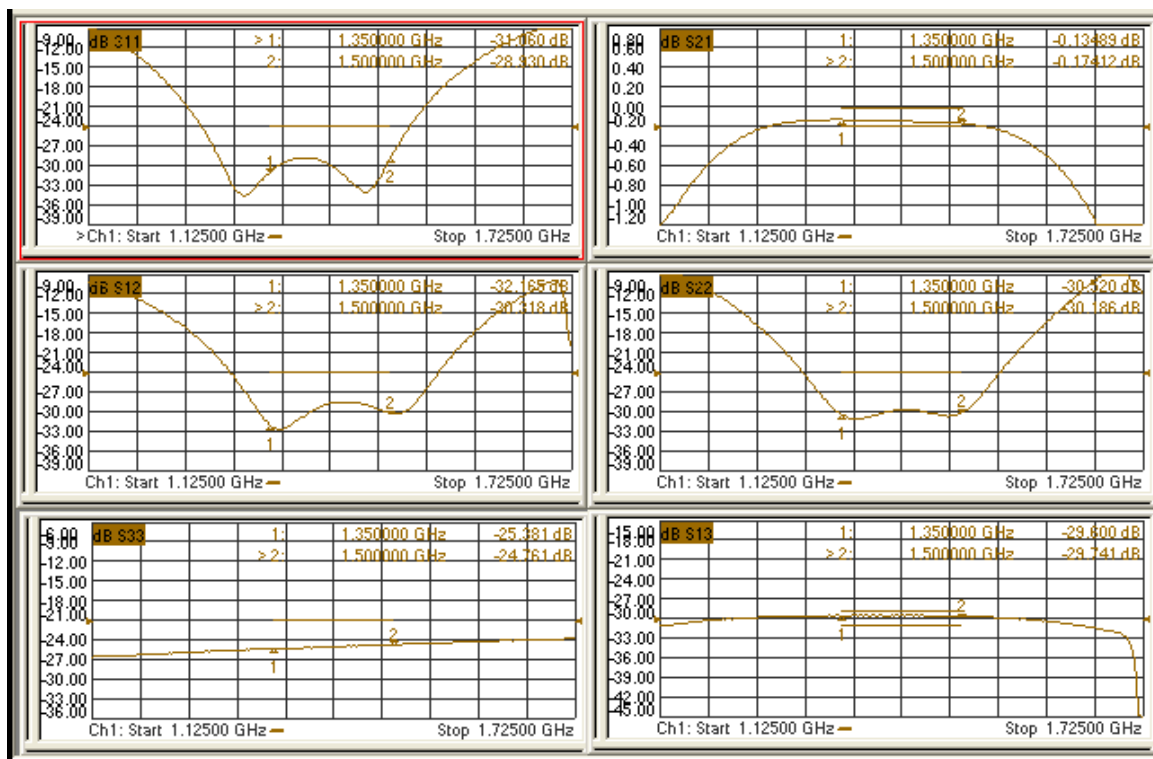

Applications

- Telecom