

JCD1200T1650M20R

Electrical Specification

Part Number	JCD1200T1650M20R
Frequency (GHz)	1.200~1.650
Insertion Loss(dB)MAX	0.45
Isolation(dB)MIN	17.0
Return Loss(dB)MIN	17.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	200/200/500 @10mSec 10% DC
Tab(W×LG×THK)(mm[Inch])	1.1[.043]x2.5[.100]x0.2[0.008]

Technical drawing of the JQL pressure washer nozzle assembly, showing dimensions in inches and millimeters.

Top View Dimensions:

- Overall Width: 1.000" (25.4 mm)
- Mounting Hole Diameter: .091" (2.3 mm)
- Distance from Center to Mounting Hole: .819" (20.8 mm)
- Distance from Center to Mounting Hole (Inner): .299" (7.6 mm)
- Distance from Center to Mounting Hole (Outer): .146" (3.7 mm)
- Mounting Hole Diameter (Outer): .020" (0.5 mm)
- Mounting Hole Diameter (Inner): .060" (1.5 mm)
- Mounting Hole Angle: 45.00° (x4)

Side View Dimensions:

- Overall Height: 1.146" (29.3 mm)
- Distance from Center to Mounting Hole: .819" (20.8 mm)
- Distance from Center to Mounting Hole (Inner): .299" (7.6 mm)
- Distance from Center to Mounting Hole (Outer): .146" (3.7 mm)
- Mounting Hole Diameter (Outer): .020" (0.5 mm)
- Mounting Hole Diameter (Inner): .060" (1.5 mm)
- Mounting Hole Angle: 45.00° (x4)

Detail View Dimensions:

- Nozzle Tip Diameter: .394" (10 mm)
- Nozzle Tip Length: .138" (3.5 mm)


Labels:

- 1 JQL 2
- P/N:xxx
- f:xxx
- S/N:xxx
- 3
- 2-56 UNC TAPPED

L Band Drop in Circulator

JCD1200T1650M20R

Test Data

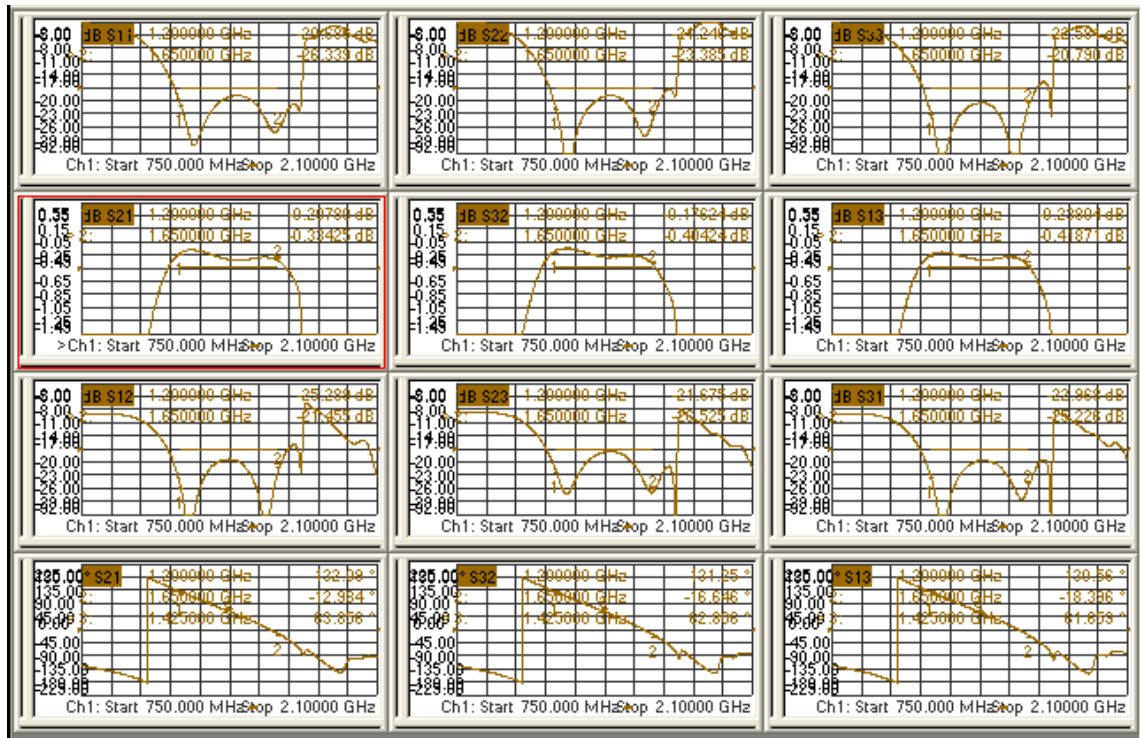

Applications

- Radar