

# S Band Surface Mount Circulator

## JCM2300T2400PT1R

### Description:




JCM2300T2400PT1R is a surface mount circulator in the frequency 2.300~2.400GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.35@+25°C || 0.40@-40~+85°C dB and minimum return loss of 20.0@+25°C || 18.0@-40~+85°C dB. This circulator can handle a CW Power FWD/REV/PK(Watt) of 10/8/100

### Electrical Specification

Part Number	JCM2300T2400PT1R
Frequency (MHz)	2.300~2.400
Insertion Loss(dB)MAX	0.35@+25°C    0.40@-40~+85°C
Isolation(dB)MIN	20.0@+25°C    18.0@-40~+85°C
Return Loss(dB)MIN	20.0@+25°C    18.0@-40~+85°C
Operating Temperature	-40°C~+85°C
Power FWD/REV/PK(Watt)	10/8/100


### Outline

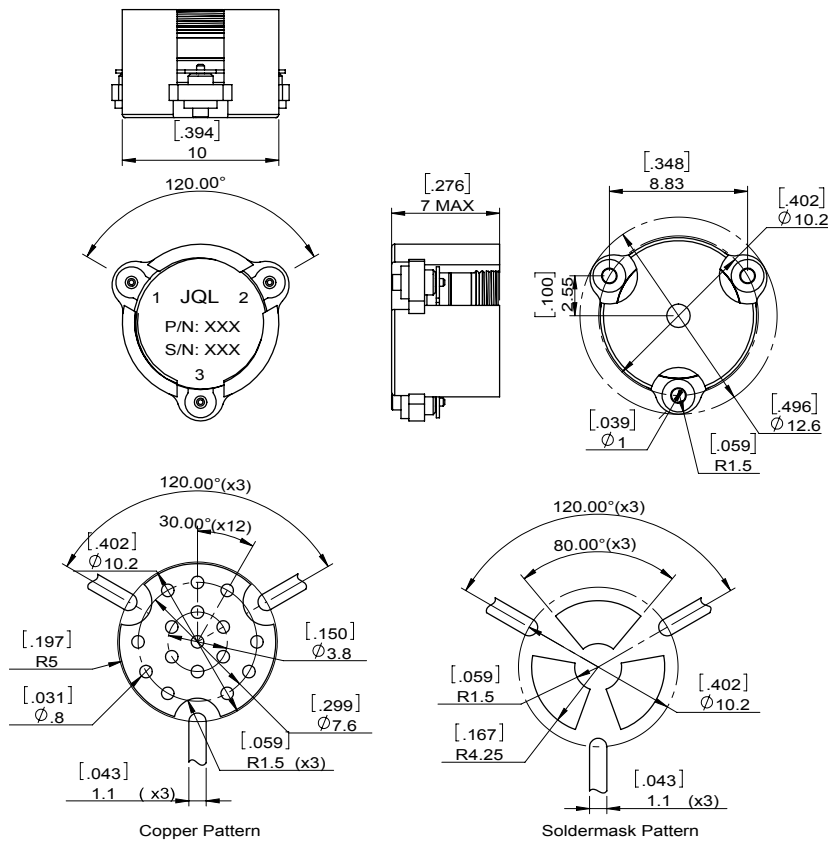

# S Band Surface Mount Circulator

## JCM2300T2400PT1R

### Test Data

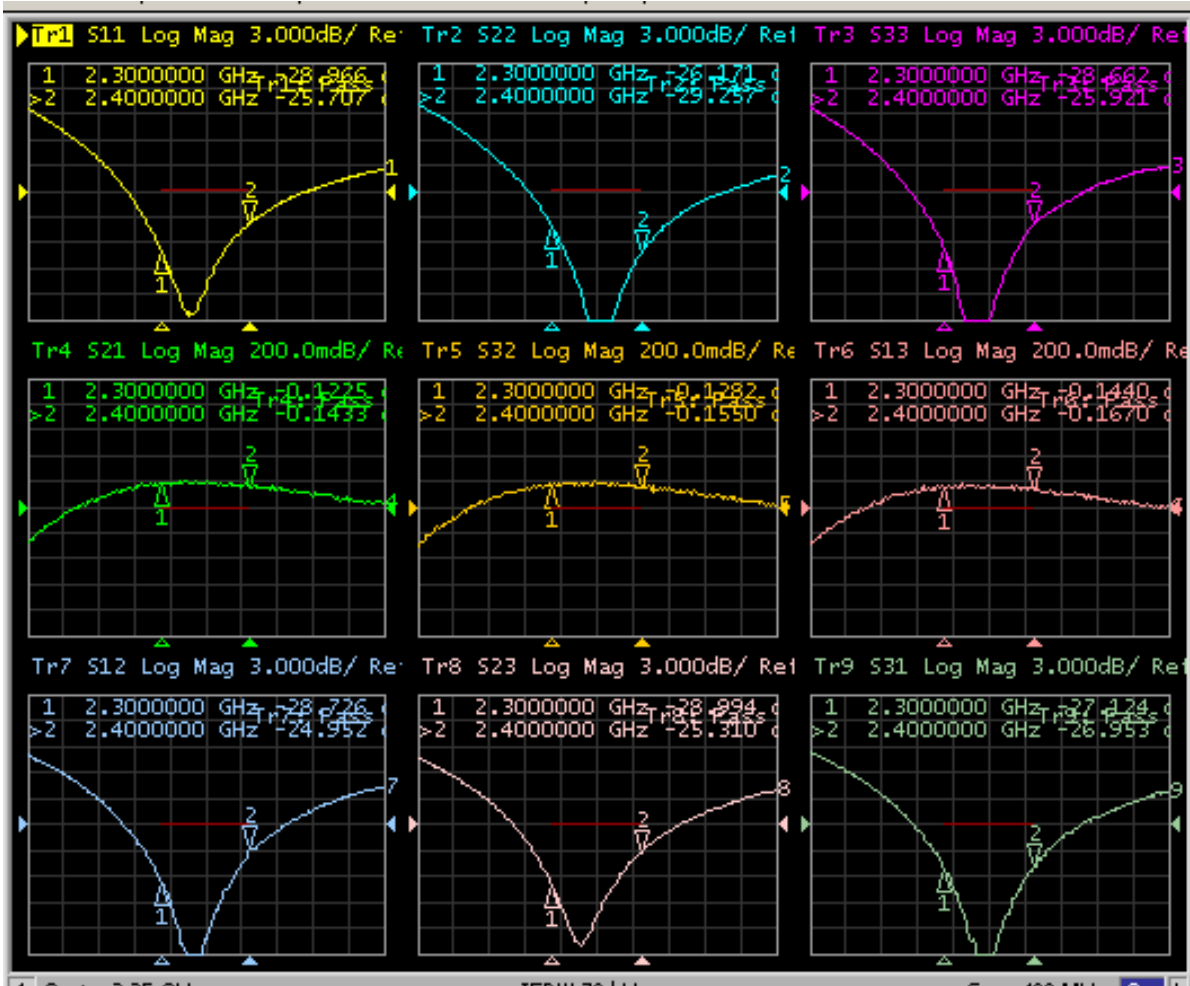

### Applications

- Telecom