


UHF Drop in Circulator

JCD0902T0928KM100C

Description:

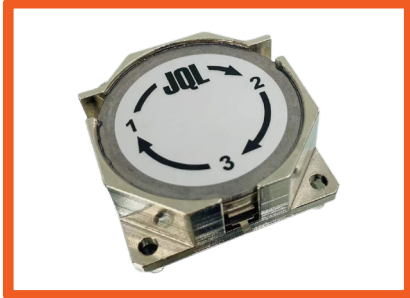


JCD0902T0928KM100C is a drop-in circulator in the frequency 0.902~0.928GHz. The device is extremely stable over the temperature range of -30°C to +60°C, with maximum insertion loss of 0.20dB and minimum return loss of 22.0dB. It can handle Power FWD/REV/PK(Watt) of -/-/1000(TBD)

Electrical Specification

Part Number	JCD0902T0928KM100C
Frequency (GHz)	0.902~0.928
Insertion Loss(dB)MAX	0.20
Isolation(dB)MIN	22.0
Return Loss(dB)MIN	22.0
Operating Temperature	-30°C~+60°C
Power FWD/REV/PK(Watt)	-/-/1000(TBD)
Tab(W×LG×THK)(mm[Inch])	1.6[0.063]×5.0[.019]×0.4[.016]


Outline

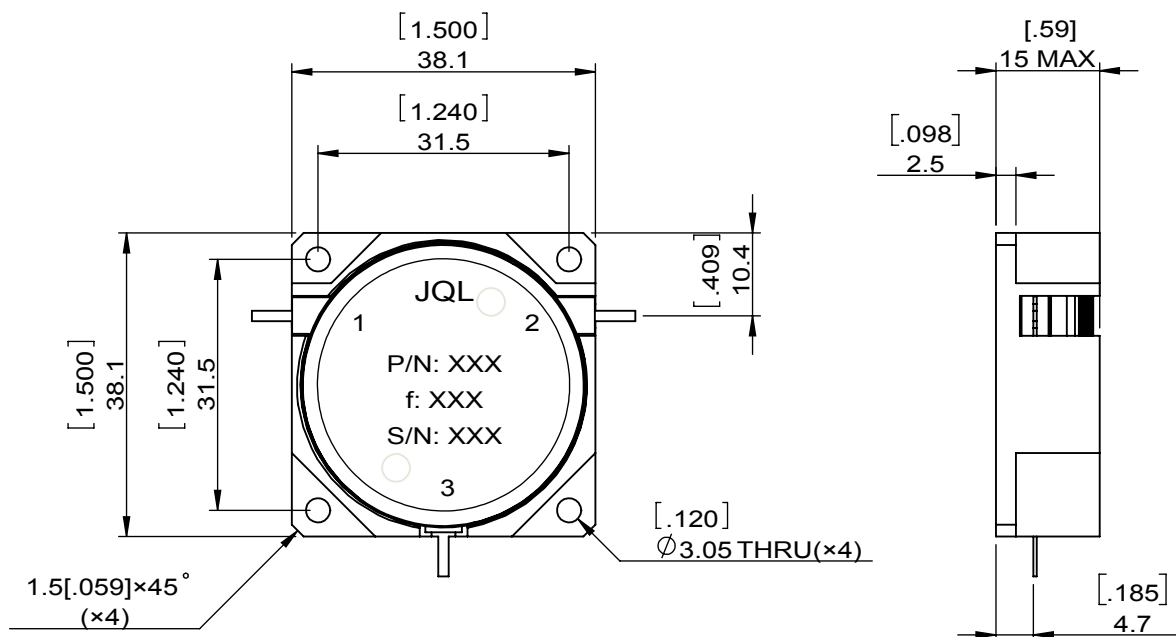

UHF Drop in Circulator

JCD0902T0928KM100C

Test Data

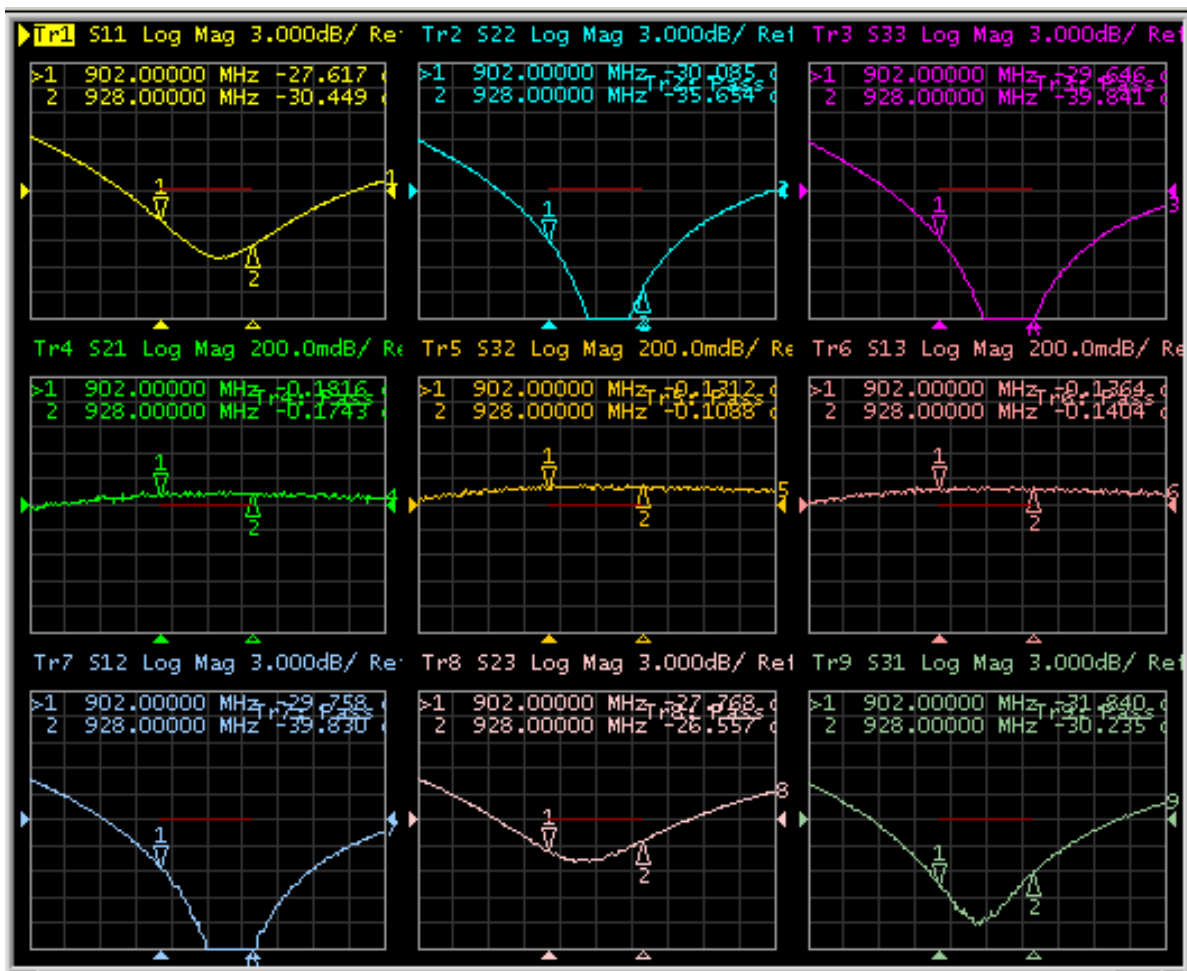

Applications

- Radio