

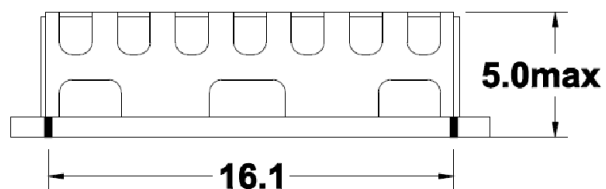


1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISOR	DATE	APPROVED	
REV.	A/0					0		YL.Chen	06.05.2020	HC.Qiu	

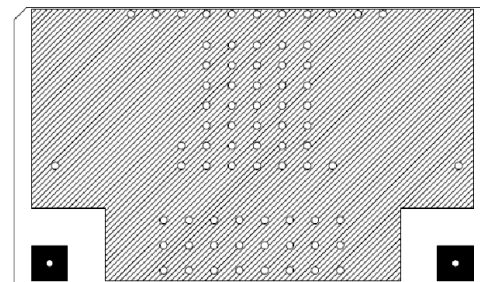


I/O PORT
 GROUND
 TOLERANCE : ± 0.20
 UNIT : mm

JQL JQL Electronic Inc				
MATERIAL: 47R Er: 19.5 Ceramic		DWG NO: JRP3300T3400		
SURFACE TREATMENT:		DWG BY: YL.Chen	06.05.2020	SCALE
DESCRIPTION: Band Pass Filter		APPV'D BY:	2 : 1	
Unit: mm[inch]		Tolerance: Liner: ± 0.2 Anguar: $\pm 0.5^\circ$	The First:	
				A4

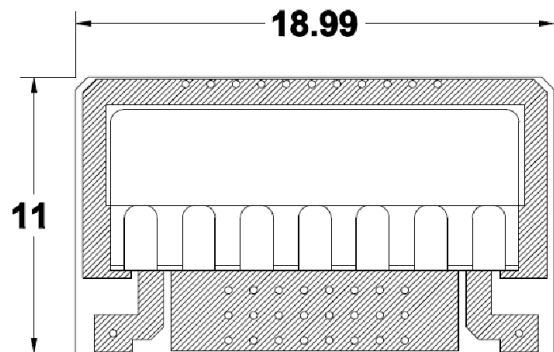

This document is the property of JQL Electronic Inc.
 It cannot be copied, duplicated, used for manufacturing purposes
 or communicated to third party as a whole or partly,
 without the written consent of JQL Electronic Inc.

1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		YL.Chen	06.05.2020	HC.Qiu			

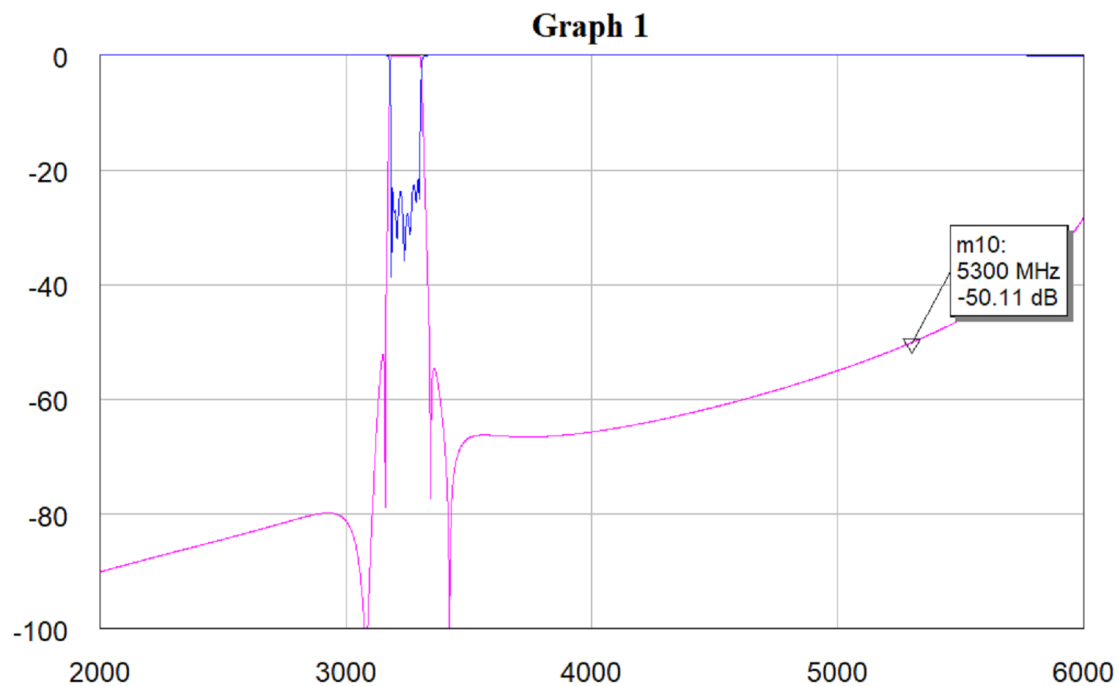

ITEMS	SPECIFICATIONS
Center Frequency(MHz)	3350
Pass Bandwidth(MHz)	3300 ~ 3400
Insertion Loss in BW(dB)	5.0 Max
Return Loss(dB)	15.0 Min
Attenuation(dB)	50.0 Min @ DC ~ 3260MHz 50.0 Min @ 3440~ 5000MHz
Power(W)	2.0 Max
Impedance(Ω)	50
Temperature ($^{\circ}$ C)	-40 ~ +105
Additional Notes	

JQL JQL Electronic Inc				
MATERIAL: 47R Er: 19.5 Ceramic		DWG NO: JRP3300T3400		
SURFACE TREATMENT:		DWG BY:	YL.Chen	06.05.2020
DESCRIPTION: Band Pass Filter		CHK'D BY:		SCALE
		APPV'D BY:		1 : 1
Unit:	mm[inch]	Tolerance:	Liner: ± 0.2 Anguar: $\pm 0.5^{\circ}$	The First:
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.