


X Band Dual Coaxial Circulator

JC2C9000T11K0T1S1

Description:

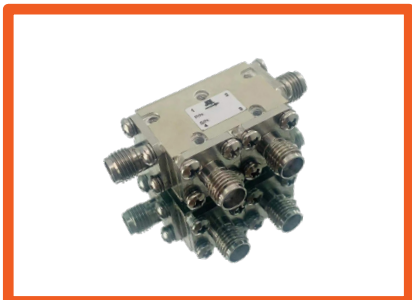


JC2C9000T11K0T1S1 is a dual coaxial circulator in the frequency 9.000~11.000GHz. The device is extremely stable over the temperature range of -30°C to +70°C, with maximum insertion loss of 0.8dB and minimum return loss of 21.0dB. It can handle a CW Power FWD/REV/PK(Watt) of 5/5/-

Electrical Specification

Part Number	JCM3300T3800PK15C
Frequency (GHz)	9.000~11.000
Insertion Loss(dB)MAX	0.8
Isolation(dB)MIN	40.0
Return Loss(dB)MIN	21.0
Operating Temperature	-30°C~70°C
Power FWD/REV/PK(Watt)	5/5/-

Outline

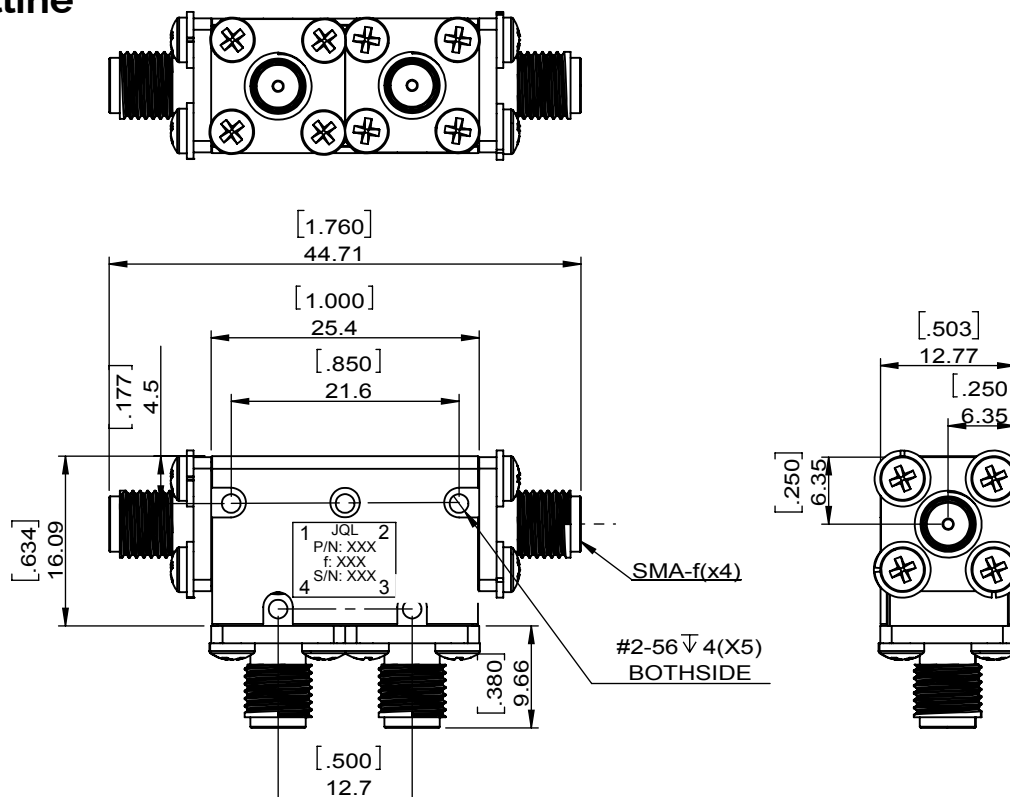

X Band Dual Coaxial Circulator

JC2C9000T11K0T1S1

Test Data

