

**JCM1805T1880PT3RC**

## Electrical Specification


| Part Number            | JCM1805T1880PT3RC             |
|------------------------|-------------------------------|
| Frequency (GHz)        | 1.805~1.880                   |
| Insertion Loss(dB)MAX  | 0.30@+25°C    0.35@-40~+125°C |
| Isolation(dB)MIN       | 20.0@+25°C    18.0@-40~+125°C |
| Return Loss(dB)MIN     | 20.0@+25°C    18.0@-40~+125°C |
| Operating Temperature  | -40°C~+125°C                  |
| Power FWD/REV/PK(Watt) | 30/30/300                     |

[illegible]

# L Band Surface Mount Circulator

JCM1805T1880PT3RC

## Test Data

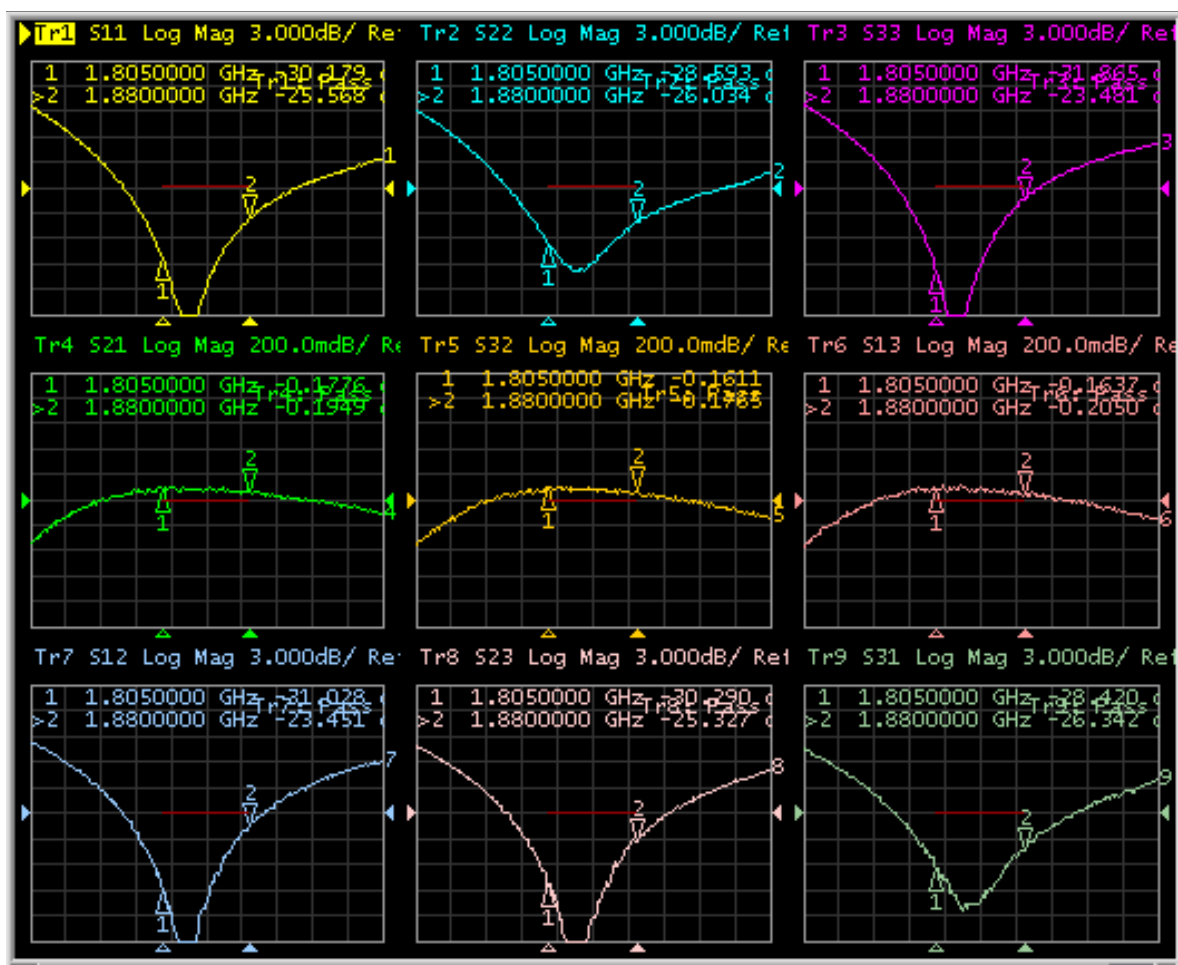

## Applications

- Radar