

Ku & K Band Waveguide Coaxial Adaptor

JWA42-SF

Description:




JWA42-SF is a waveguide coaxial adaptor in the frequency 17.6 ~ 26.7GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.5dB and VSWR of 1.25 MAX. Using FBP220(UBR220) flange.

Electrical Specification

Part Number	JWA42-SF
Frequency (GHz)	17.6 ~ 26.7
Insertion Loss(dB)MAX	0.5
VSWR	1.25 Max
Flange	FBP220(UBR220)
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	Request for info


Outline

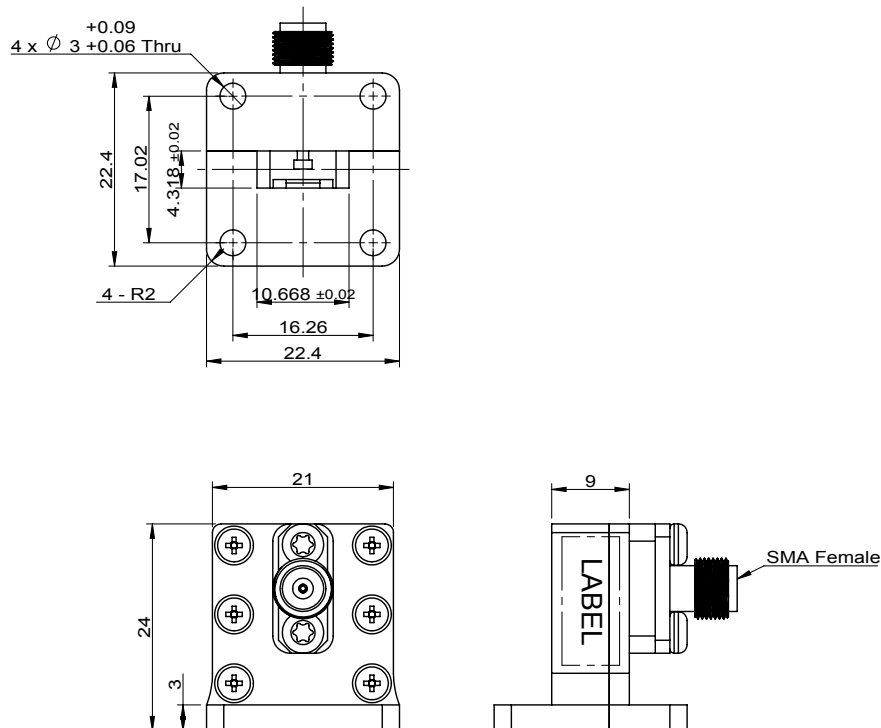

Ku & K Band Waveguide Coaxial Adaptor

JWA42-SF

Test Data

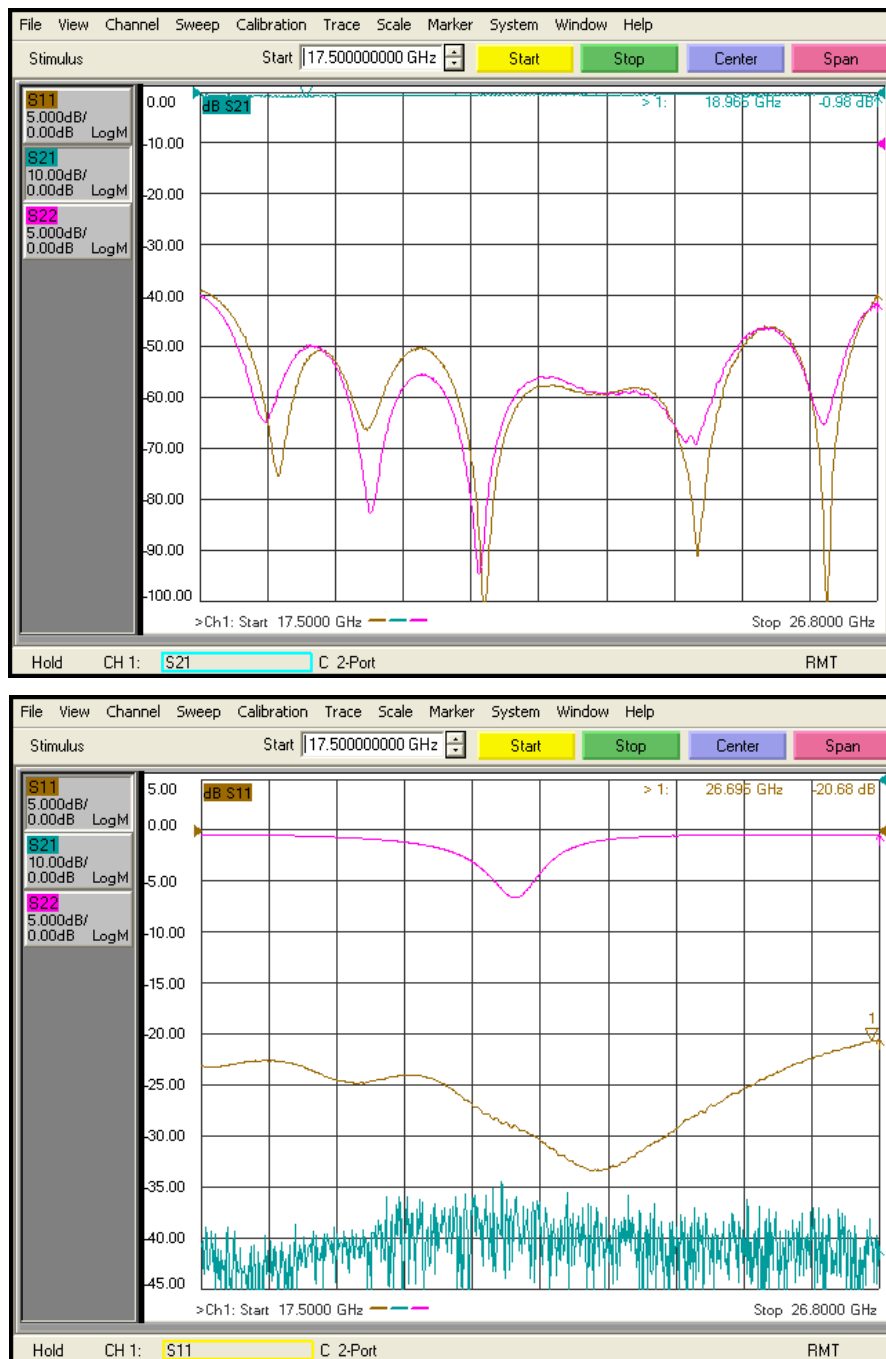

Applications

- Radar Link