


X & Ku Band Waveguide Coaxial Adaptor

JWA75-NF

Description:

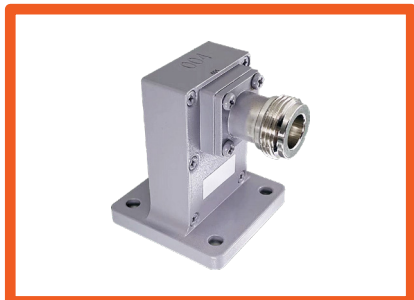


JWA75-NF is a waveguide coaxial adaptor in the frequency 9.84 ~ 15.0GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.3dB and VSWR of 1.25 MAX. Using FBP120(UBR120) flange.

Electrical Specification

Part Number	JWA75-NF
Frequency (GHz)	9.84 ~ 15.0
Insertion Loss(dB)MAX	0.3
VSWR	1.25 Max
Flange	FBP120(UBR120)
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	Request for info


Outline

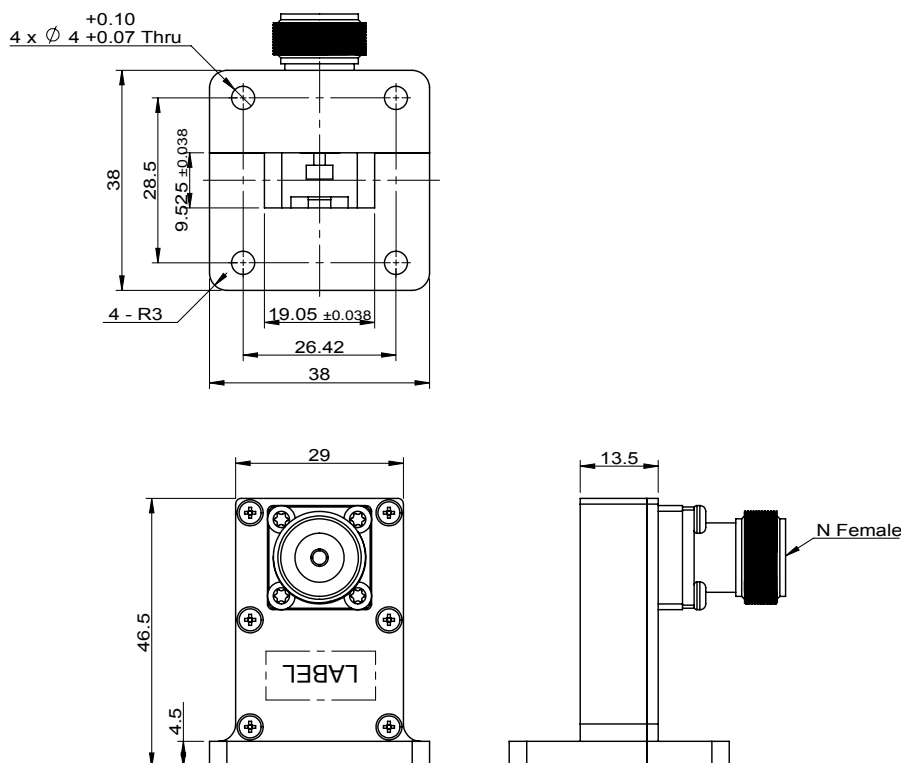

X & Ku Band Waveguide Coaxial Adaptor

JWA75-NF

Test Data

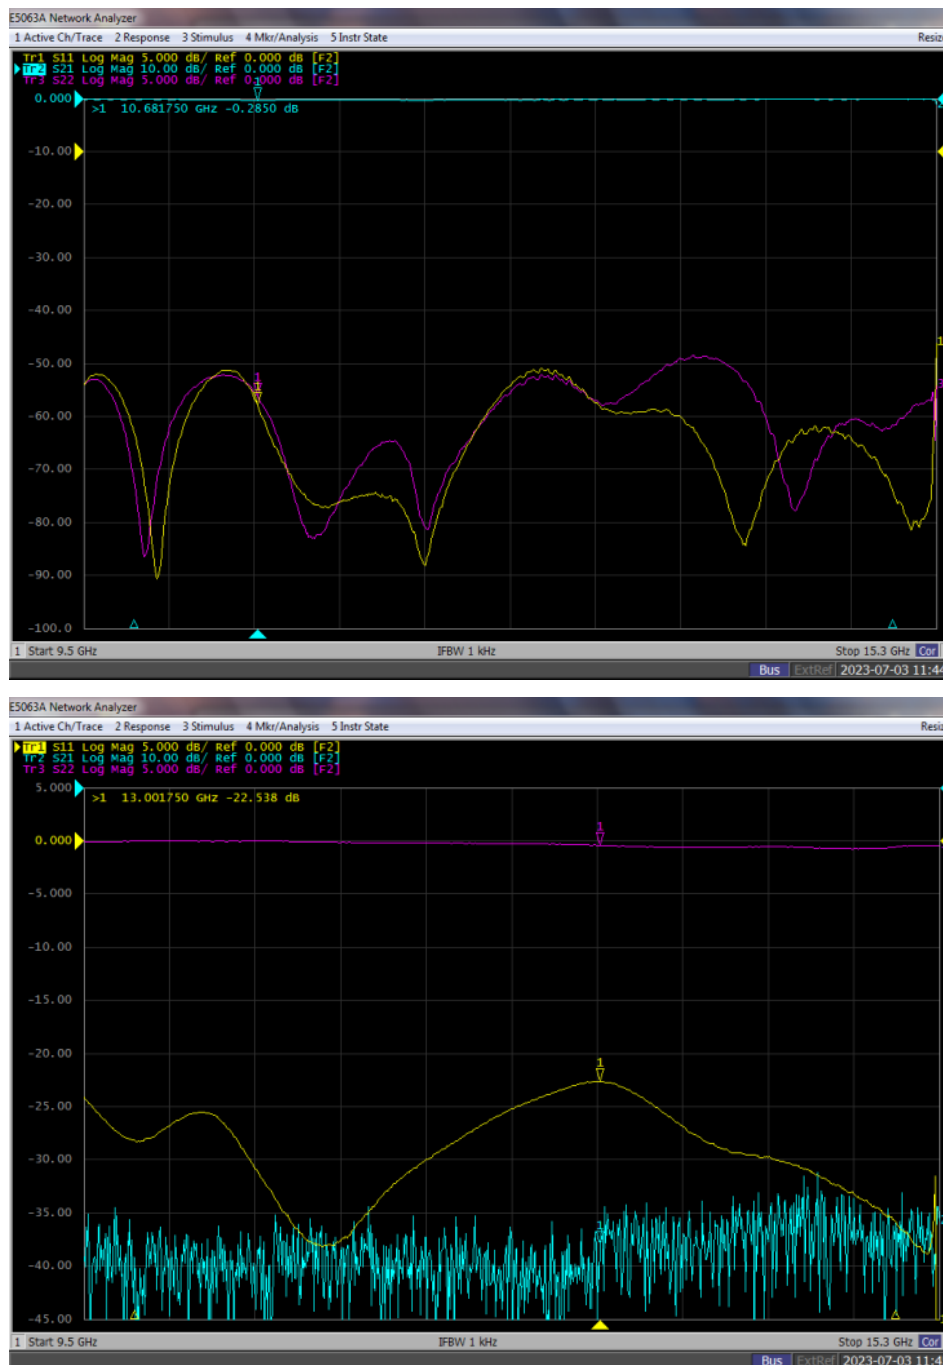

Applications

- Radio Link