


UHF Band Coaxial Circulator

JCC0865T0928S0

Description:


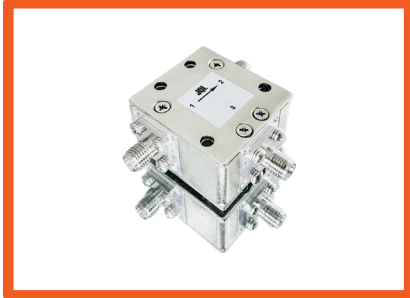


JCC0865T0928S0 is a coaxial Circulator in the frequency 0.865~0.928GHz. The device is extremely stable over the temperature range of -30°C to +80°C, with maximum insertion loss of 0.30dB and minimum return loss of 21.0dB. It can handle a CW Power FWD/REV/PK(Watt) of 5/5/-

Electrical Specification

Part Number	JCC0865T0928S0
Frequency (GHz)	0.865~0.928
Insertion Loss(dB)	0.30
Isolation(dB)MIN	21.0
Return Loss(dB)	21.0
Operating Temperature	-30°C~+80°C
Power FWD/REV/PK(Watt)	5/5/-


Outline

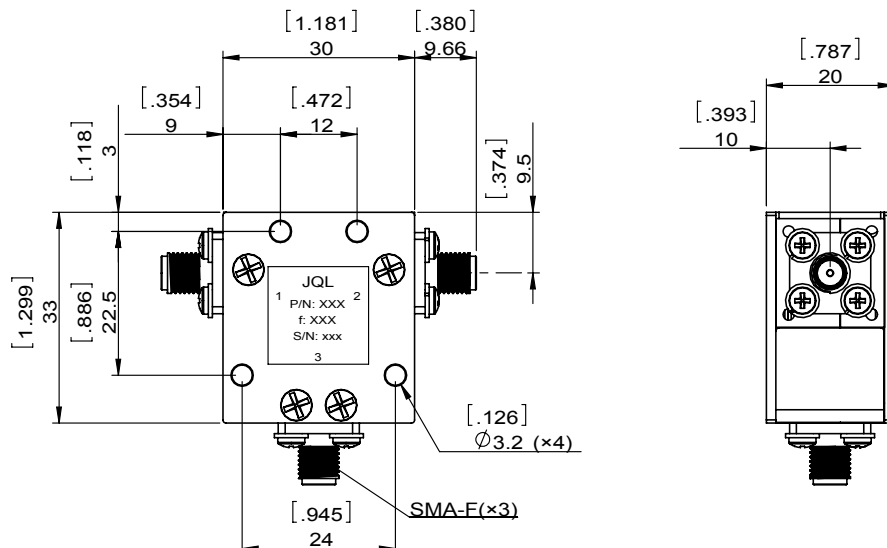

UHF Band Coaxial Circulator

JCC0865T0928S0

Test Data

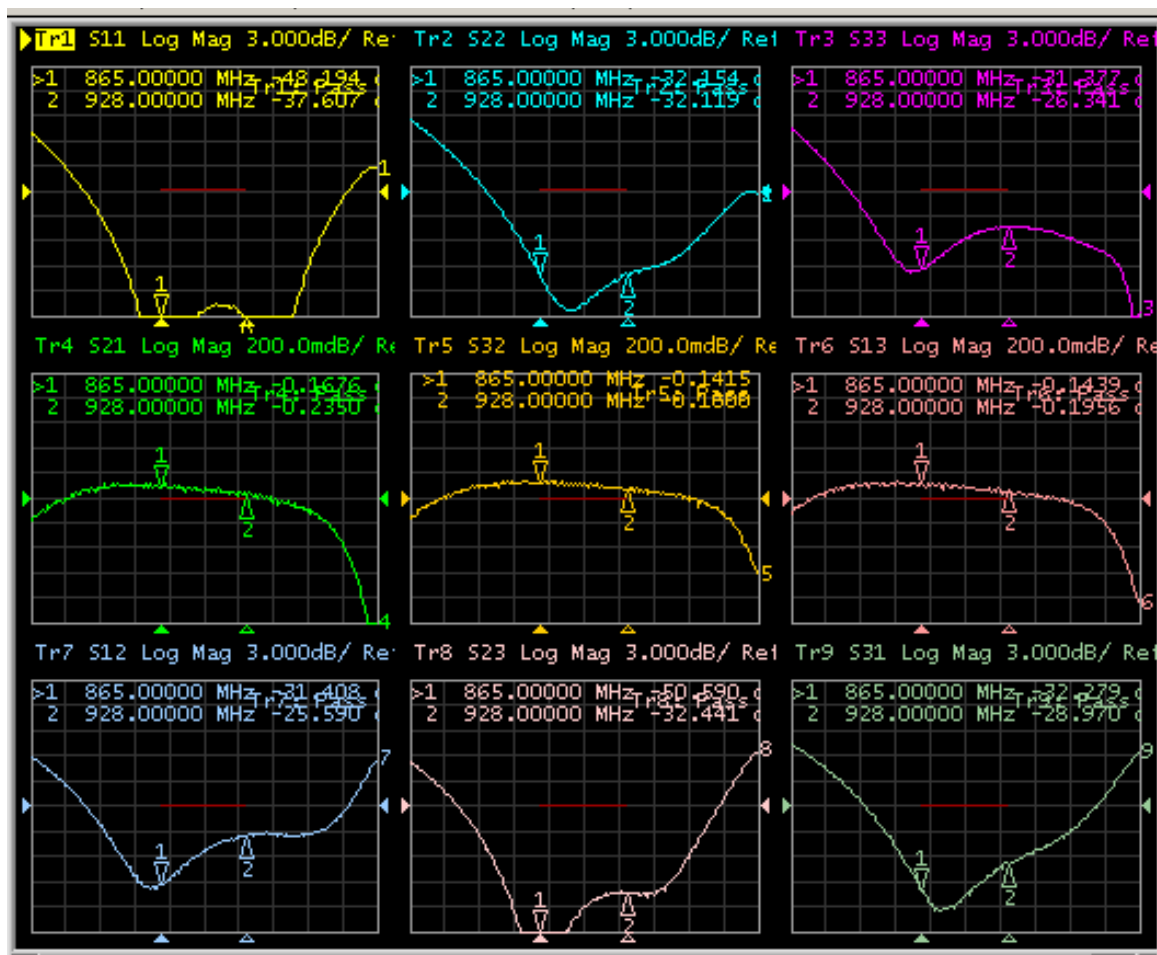

Applications

- Telecom