



1		2		3		4		5		6	
Document No. QR4-700-T-003		REV. A/0		REV. 0		DESCRIPTION		REVISOR ZC.Wu		DATE 02.02.2015	
										APPROVED David	

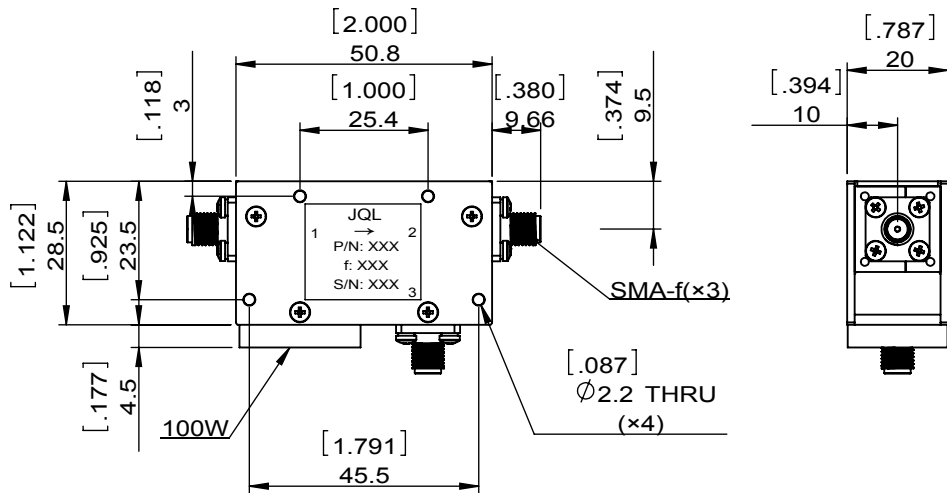

SPECIFICATIONS	
Part's Number	JC2C3300T3800T1S10
Frequency(GHz)	3.300~3.800
Direction	CW
Insertion Loss(dB)MAX	0.25 per junction
Isolation(dB)MIN	21.0 per junction
Return Loss(dB)MIN	21.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	100/100/-
Operating Temperature(°C)	-30~+75
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	100/-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

JQL JQL Electronic Inc				
MATERIAL: STEEL		DWG NO: JC2C3300T3800T1S10		
SURFACE TREATMENT: NICKLE PLAINING		DWG BY:	ZC.Wu	02.02.2015
DESCRIPTION: DUAL COAXIAL CIRCULATOR		CHK'D BY:		SCALE
		APPV'D BY:		2:3
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

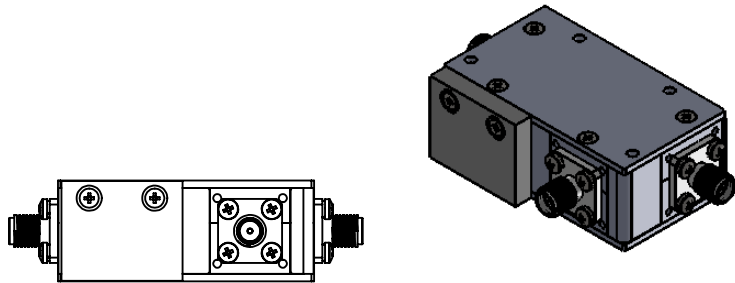

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.