


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ZC.Wu	12.17.2014	David					



SPECIFICATIONS	
Part's Number	JIWR34-12.7A-23K13T24K41
Frequency(GHz)	23.13~23.41
Direction	
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	23
Return Loss(dB)MIN	22
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	2/2
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	-40~+85
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	The Flatness should be ± 0.1 dB per 500MHz-

JQL JQL Electronic Inc				
MATERIAL: -		DWG NO: JIWR34-12.7A-23K13T24K41		
SURFACE TREATMENT: -		DWG BY:	ZC.Wu	12.17.2014
DESCRIPTION: WAVE GUIDE ISOLATOR		CHK'D BY:		SCALE
		APPV'D BY:		2:1
		Unit: mm[inch]	Tolerance: Liner: ± 0.25 Anguar: $\pm 0.5^\circ$	The First:
				A4

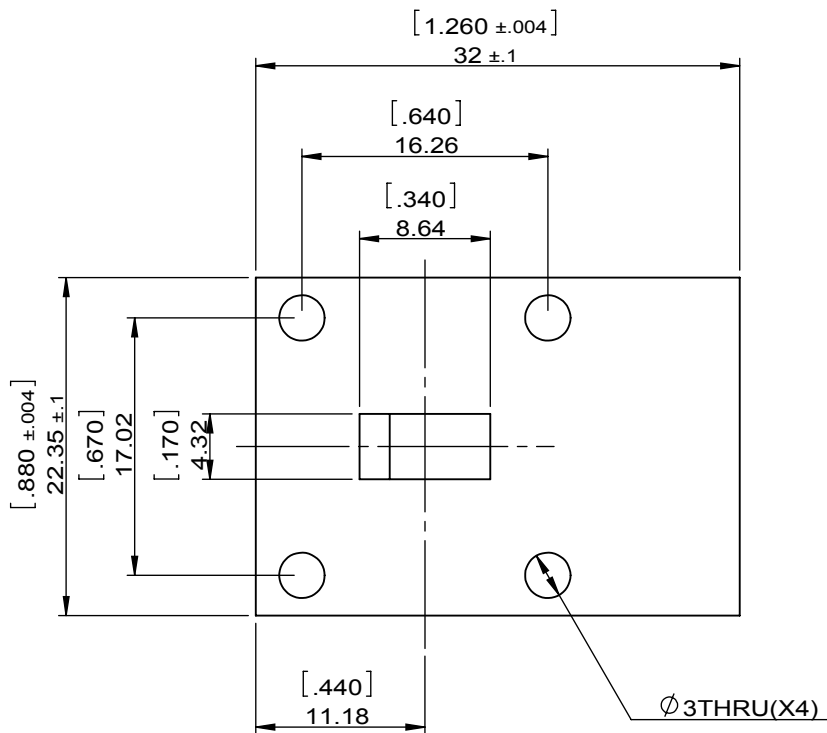

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.