



1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		LJ.Zhang	08.01.2013	David			

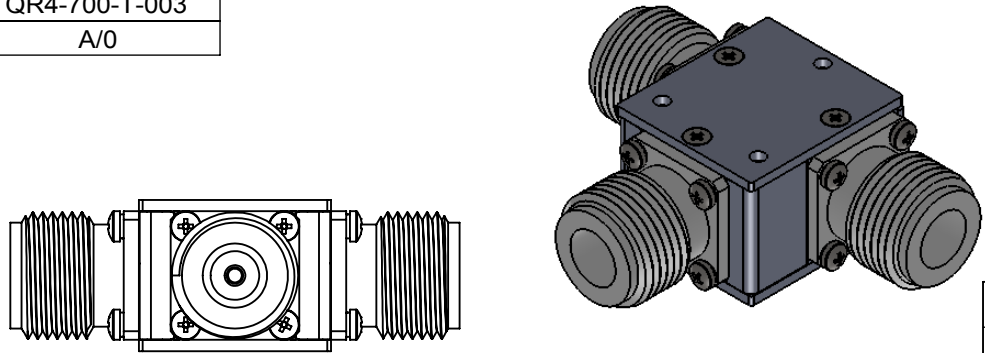

SPECIFICATIONS	
Part's Number	JCC2000T2300N15
Frequency(GHz)	2.000~2.300
Direction	-
Insertion Loss(dB)MAX	0.35
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-75 with +43 dBm/tone-
Power FWD/REV/PK(Watt)	150/150/1000
Operating Temperature(°C)	+15~+40
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

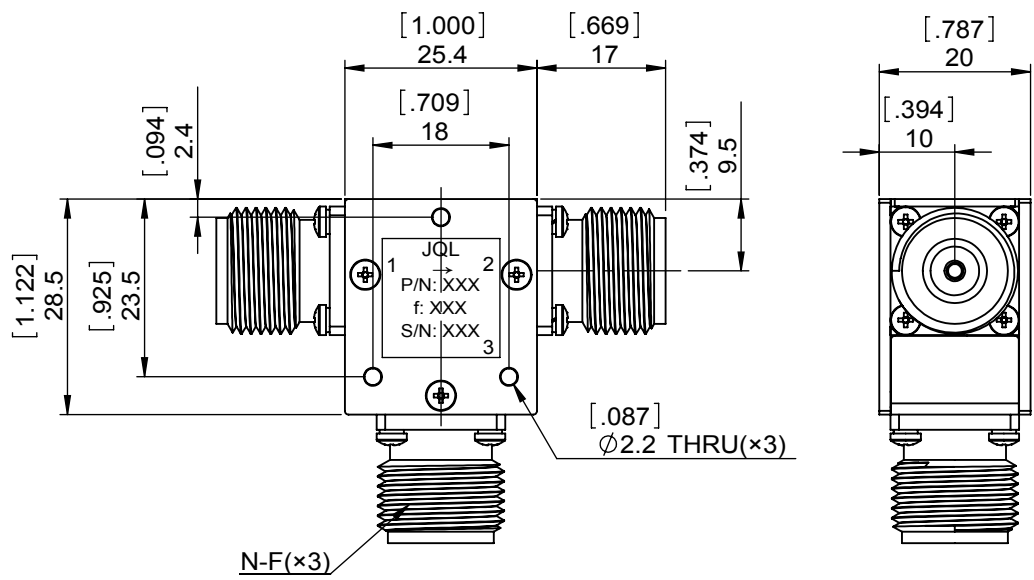

JQL JQL Electronic Inc				
MATERIAL: STEEL		DWG NO: JCC2000T2300N15		
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	LJ.Zhang	08.01.2013
DESCRIPTION: COAXIAL CIRCULATOR		CHK'D BY:		
		APPV'D BY:		
Unit:	Tolerance:	The First:		1:1
mm[inch]	Liner: ±0.25 Anguar: ±0.5°			
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.