

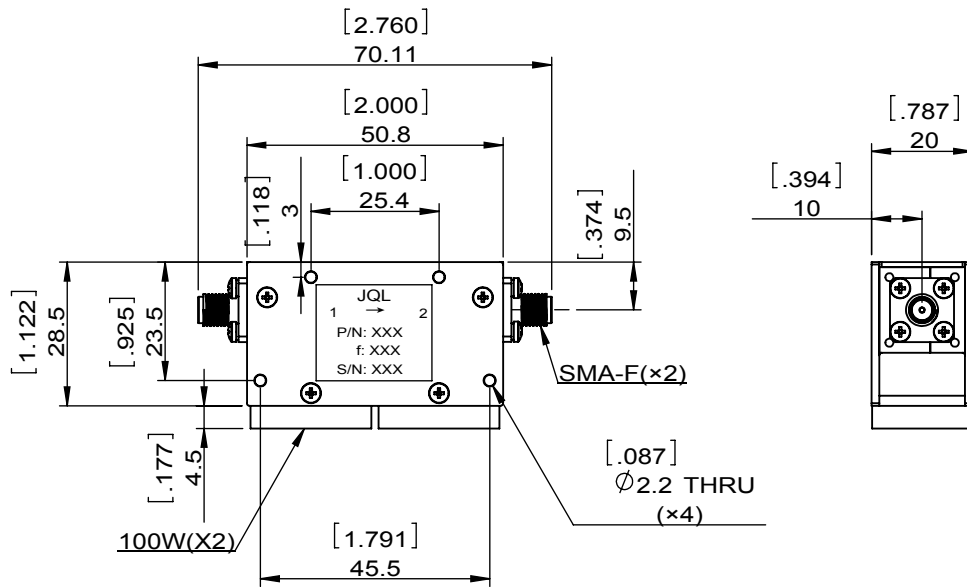


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ZC.Wu	06.26.2014	David					



SPECIFICATIONS	
Part's Number	J12C1800T2000S1
Frequency(GHz)	1.800~2.000
Direction	CW
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	40.0
Return Loss(dB)MIN	22.0
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	100/10/-
Operating Temperature(°C)	-30~+75
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	
Termination/Attenuator(Watt/dB)	100/-
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	

JQL JQL Electronic Inc				
MATERIAL: STEEL		DWG NO: J12C1800T2000S1		
SURFACE TREATMENT: NICKLE PLAINING		DWG BY:	ZC.Wu	06.26.2014
DESCRIPTION: DUAL COAXIAL ISOLATOR		CHK'D BY:		SACLE
		APPV'D BY:		2:3
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.