

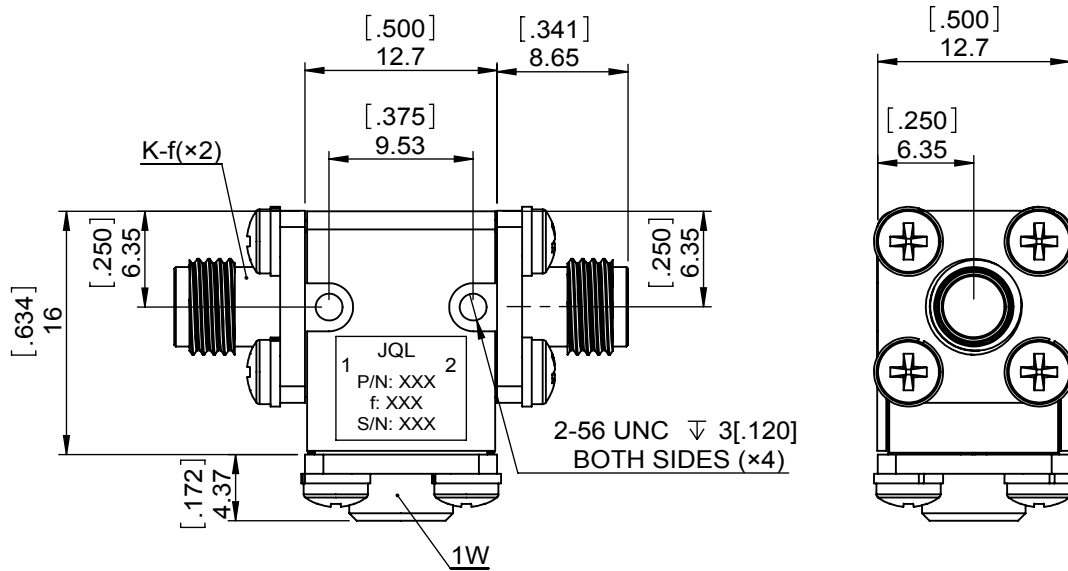


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		LJ.Zhang	11.08.2013	David			

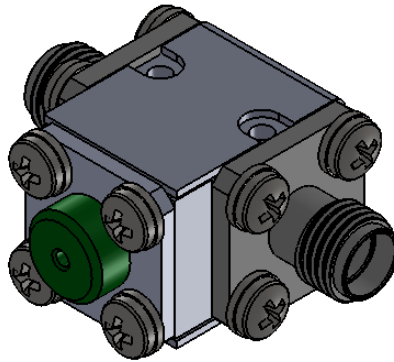

SPECIFICATIONS	
Part's Number	JIC17K0T22K0K1
Frequency(GHz)	17.00~22.00
Direction	-
Insertion Loss(dB)MAX	0.50
Isolation(dB)MIN	19.0
Return Loss(dB)MIN	19.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	10/1/-
Operating Temperature(°C)	-30~+70
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	1
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

JQL JQL Electronic Inc				
MATERIAL: STEEL		DWG NO: JIC17K0T22K0K1		
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	LJ.Zhang	11.08.2013
DESCRIPTION: COAXIAL ISOLATOR		CHK'D BY:		
		APPV'D BY:		
Unit:	Tolerance:	The First:		1:1
mm[inch]	Liner: ±0.25 Anguar: ±0.5°			A4

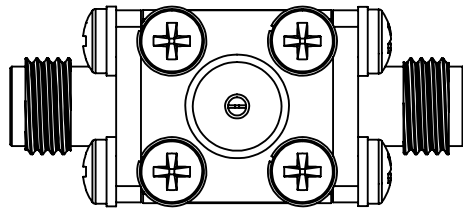

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.