

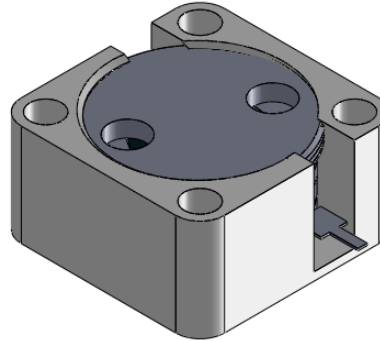
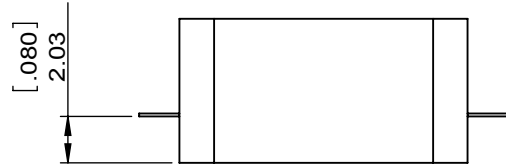


1	2
Document No.	QR4-700-T-003
REV.	A/0

4	5	6		
REV.	DESCRIPTION	REVISOR	DATE	APPROVED
0		ZC.Wu	01.16.2015	David
1	Add Storage Temp.	ZC.Wu	06.10.2015	David

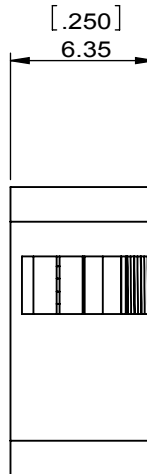

SPECIFICATIONS	
Part's Number	JID12K2T12K5VM0
Frequency(GHz)	12.200~12.500
Direction	CW
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	0.5/0.5/-
Operating Temperature(°C)	-30~+85
Storage Temperature(°C)	-40~+85
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	0.64[0.025]x1.78[0.07]±0.51[0.02]x0.13[0.005]±0.03[0.001]
Additional Notes	-

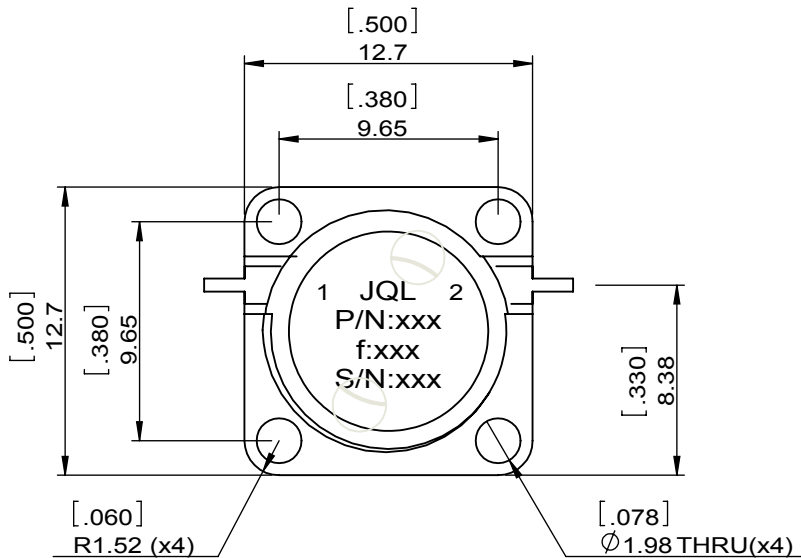

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc				
MATERIAL: STEEL		DWG NO: JID12K2T12K5VM0		
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	ZC.Wu	01.16.2015
DESCRIPTION: DROP-IN ISOLATOR		CHK'D BY:		SCALE
		APPV'D BY:		3:1
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4